


PLAN VIEW

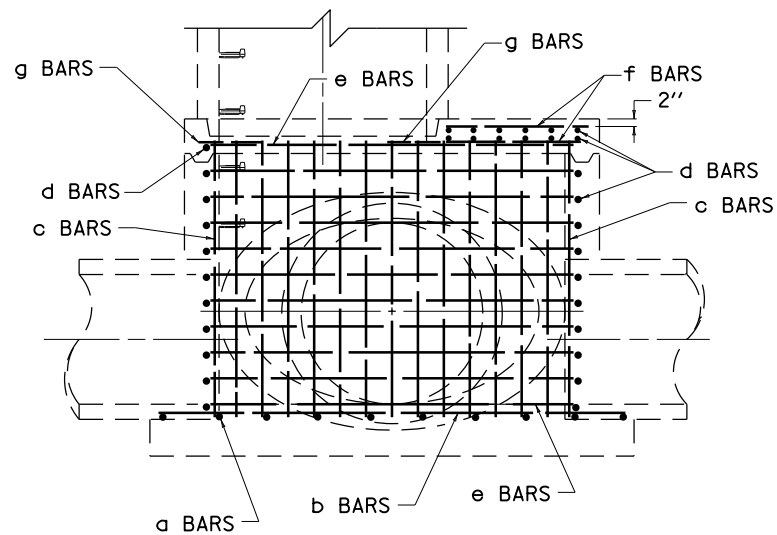

SECTION A-A

NOTES

1. PLACE ALL STEEL REINFORCEMENT 2" FROM INSIDE OF CHAMBER WALL EXCEPT WHERE OTHERWISE SPECIFIED.
2. ALL a AND b BARS SPACED 1'-0" ON CENTER.
3. ALL c, d, e, AND f BARS SPACED 6" ON CENTER.

USE WITH CUR. STD. DWGS.
RDM-010, RDM-011, AND RDM-013

KENTUCKY
DEPARTMENT OF HIGHWAYS

MANHOLE TYPE C
(STEEL PATTERN)

STANDARD DRAWING NO. RDM-012-02

SUBMITTED	<i>John B. Sackett</i>	12-1-99
	DIRECTOR, DIVISION OF DESIGN	DATE
APPROVED	<i>J. M. [Signature]</i>	12-1-99
	STATE HIGHWAY ENGINEER	DATE