


- ~ NOTES ~
- ① SEE PLANS FOR SIZE, LOCATION AND PAYMENT FOR RACEWAY WHEN REQUIRED.
  - ② FABRIC WRAPPED BACKFILL DRAIN, (ONE PER WEEP HOLE).
  - ③ ALL WALLS AND SLABS ARE 8" THICK UNLESS OTHERWISE SHOWN.
  - ④ MEDIAN BARRIER WALL MAY BE CAST-IN-PLACE, FIXED OR SLIP-FORMED, CONTRACTOR'S OPTION.
  - ⑤ WALL REINFORCEMENT IS DETAILED FOR CAST-IN-PLACE WALLS. FOR SLIP-FORMED WALLS SEE CURRENT STANDARD DRAWING [RDB-241](#) FOR STEEL DETAIL.

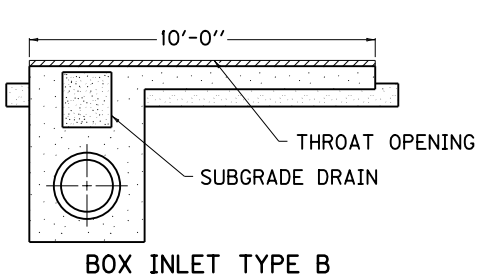

USE WITH CUR. STD. DWGS.  
[RBM-050](#), [RBM-053](#), [RDB-241](#)

KENTUCKY  
 DEPARTMENT OF HIGHWAYS

CONCRETE MEDIAN  
 BARRIER BOX INLET  
 (50" TALL WALL  
 CAST-IN-PLACE)

STANDARD DRAWING NO. RDB-240-02

SUBMITTED *William S. Gullett* 12-01-15  
DIRECTOR, DIVISION OF DESIGN DATE

APPROVED *John* 12-01-15  
STATE HIGHWAY ENGINEER DATE