



TYPICAL SECTION

~ NOTES ~

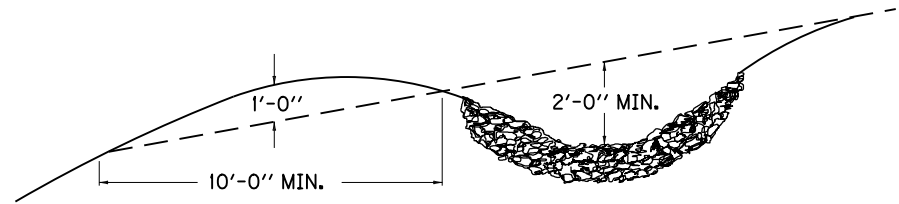

TYPICAL INTERCEPTOR DITCH

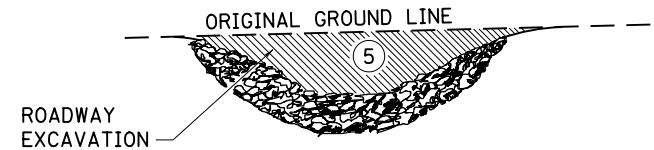

BID ITEMS AND UNIT TO BID  
 CHANNEL LINING CLASS II TON  
 CHANNEL LINING CLASS III TON

TON  
 TON

1. CHANNEL LINING WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER TON FOR EACH CLASS.
2. CHANNEL LINING WILL NOT BE REQUIRED IN THE BOTTOM OF THE DITCH WHERE SOLID ROCK IS ENCOUNTERED.
3. CHANNEL LINING ESTIMATED ON THE BASIS OF 0.50 TON PER SQ. YD. PER FT. OF DEPTH.
- ④ WIDEN CHANNEL LINING NEAR OUTLET END OF STRUCTURE AS DIRECTED BY THE ENGINEER.
- ⑤ FROM THE TOP OF THE LINING TO THE ORIGINAL GROUNDLINE.
- ⑥ ALTERNATE LOCATION OF GROUNDLINE.
- ⑦ 15" MIN. CLASS II, OR 24" MIN. CLASS III.
8. D = DEPTH TO PROTECT, T = THICKNESS, (SEE PLAN NOTES FOR THESE VALUES)

KENTUCKY  
 DEPARTMENT OF HIGHWAYS

CHANNEL LINING  
 CLASS II AND III

STANDARD DRAWING NO. RDD-040-05

SUBMITTED *William S. Galt* 12-01-15  
 DIRECTOR, DIVISION OF DESIGN DATE  
 APPROVED *[Signature]* 12-01-15  
 STATE HIGHWAY ENGINEER DATE