


~ NOTES ~

- 1. MARKERS INSTALLED AT DOUBLE YELLOW CENTERLINES SHALL BE PLACED BETWEEN THE TWO LINES.
- 2. MARKERS INSTALLED ALONG LANE LINES OR DASHED YELLOW CENTERLINES SHALL BE PLACED BETWEEN AND IN LINE WITH THE SKIPS.
- 3 MARKERS INSTALLED ALONG EDGE LINES SHALL BE PLACED SO THAT THE NEAR EDGE OF THE GROOVE IS NO MORE THAN 1" FROM THE NEAR EDGE OF THE LINE.
- (4) LENGTH TO BE DETERMINED ON A PROJECT BY PROJECT BASIS.
- 5. MARKERS SHALL NOT BE INSTALLED ON TOP OF THE PAVEMENT JOINT. OFFSET MARKERS A MINIMUM OF 2" FROM THE PAVEMENT JOINT. ENSURE THAT THE FINISHED LINE OF MARKERS IS STRAIGHT WITH MINIMAL LATERAL DEVIATION. MARKERS MAY BE ELIMINATED OR PLACEMENT ADJUSTED AT THE DISCRETION OF THE ENGINEER.

BID ITEMS

06610 - INLAID PAVEMENT MARKER - MW 06612 - INLAID PAVEMENT MARKER - BY UNIT TO BID EACH EACH

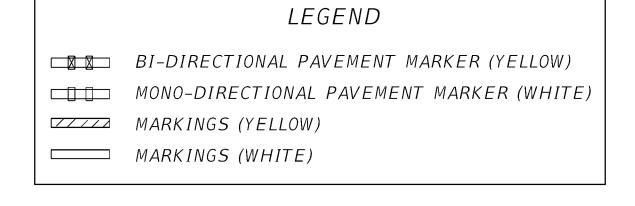

DRAWING NOT TO SCALE
USE WITH CUR. STD. DWG.
TPM-207

SUBMITTED DIVISION DIRECTOR 06-09-21

COMMONWEALTH OF KENTUCKY
DEPARTMENT OF HIGHWAYS

KENTUCKY
TRANSPORTA

KENTUCKY
TRANSPORTA

KENTUCKY
TRANSPORTA

DRAWING TITLE: SEPIA 015 - INLAID PAVEMENT MARKER ARRANGEMENTS TWO-WAY, LEFT-TURN LANE

ITEM NO. COUNTY OF

SHEET NO.