





~ NOTES ~

- BID ITEMS AND UNIT TO BID  
 FENCE-WOVEN WIRE TYPE I LF  
 CONCRETE-CLASS B CUYD
- ① STUDDED "T" POST CONFORMING TO ASTM A702 AT 1.33 LBS. PER FOOT - OR -  
 ROLL FORM POST AT 1.40 LBS. PER FOOT (SEE DETAIL)
  - ② NOT REQUIRED FOR ROLL FORM POST.
  3. WOVEN-WIRE FABRIC SHALL BE EITHER ALUMINUM-COATED STEEL NO. 1047-6-9 OR ZINC-COATED STEEL NO. 1047-6-9.
  4. ALL FITTINGS SHALL COMPLY WITH ASTM F626.
  5. NPS = NOMINAL PIPE SIZE - ASTM F1083 AND F1043 (HEAVY INDUSTRIAL FENCE) SHALL GOVERN.

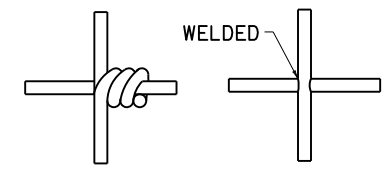

ALTERNATE METHODS OF SECURING VERTICAL STAY WIRE TO THE HORIZONTAL WIRE OF THE FABRIC.

DETAIL "A"

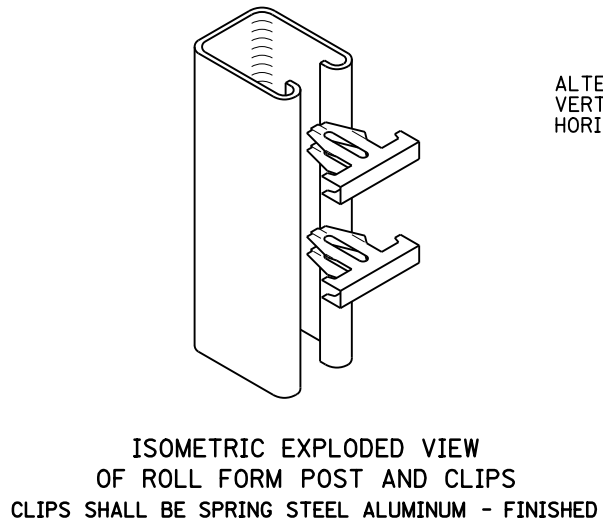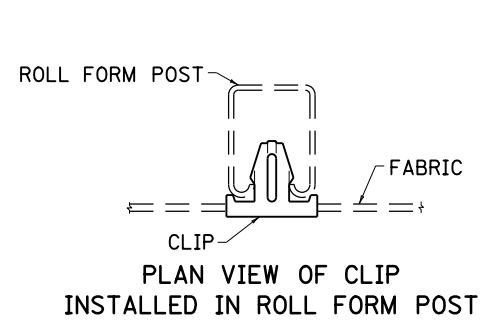

<b>KENTUCKY DEPARTMENT OF HIGHWAYS</b>		
<b>WOVEN WIRE FENCE TYPE I</b>		
STANDARD DRAWING NO. RFW-005-08		
SUBMITTED	<i>William P. Galbraith</i> DIRECTOR, DIVISION OF DESIGN	12-01-15 DATE
APPROVED	<i>[Signature]</i> STATE HIGHWAY ENGINEER	12-01-15 DATE