

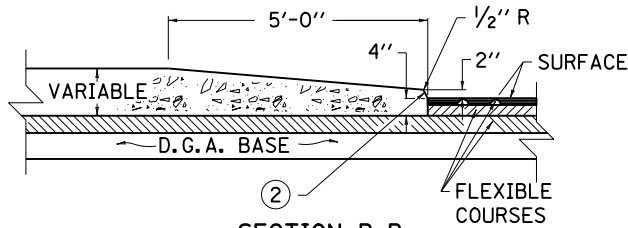
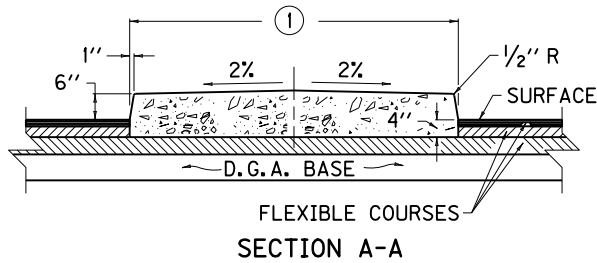




PLAN VIEW
BARRIER MEDIAN

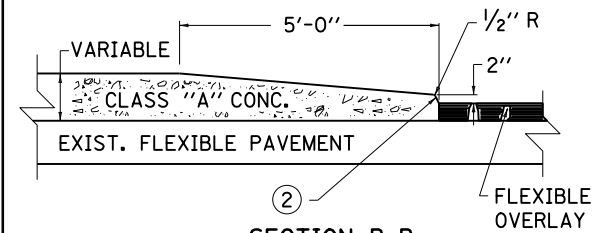



SECTION B-B
BARRIER MEDIAN
WITH FLEXIBLE PAVEMENT
(TYPE 2)

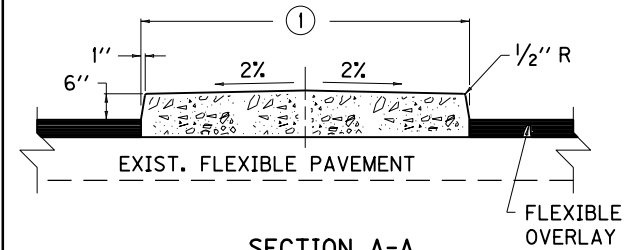



SECTION B-B
BARRIER MEDIAN
ON EXISTING FLEXIBLE PAVEMENT
(TYPE 4)

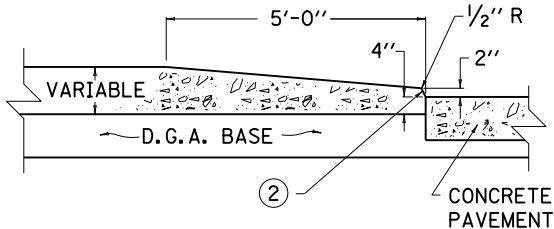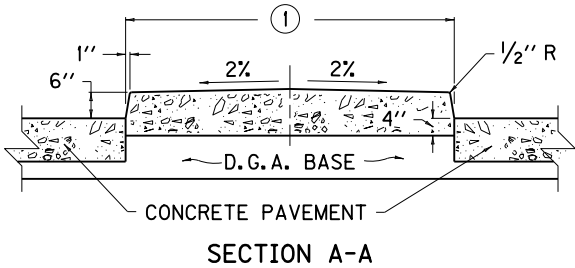

SECTION B-B
BARRIER MEDIAN
WITH RIGID PAVEMENT
(TYPE 1)

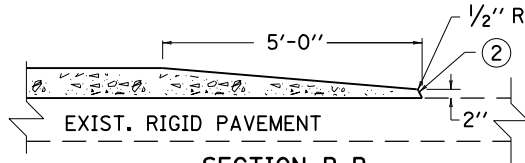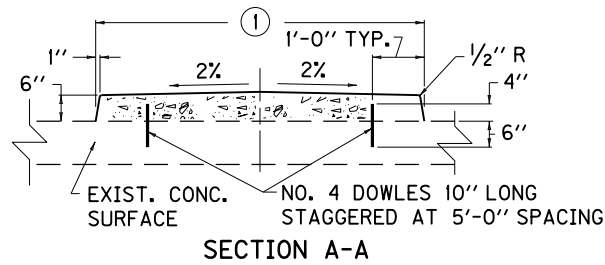


SECTION B-B
BARRIER MEDIAN
ON EXISTING RIGID PAVEMENT
(TYPE 3)

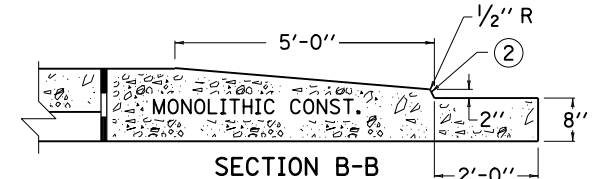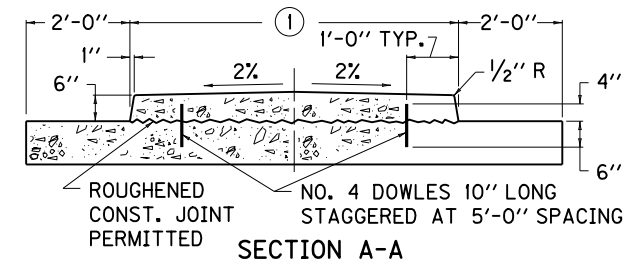

SECTION B-B
BARRIER MEDIAN
WITH FLEXIBLE PAVEMENT
(TYPE 5)

~ NOTES ~

- ① SEE PLANS FOR CONSTANT OR VARIABLE WIDTH DIMENSIONS.
 - ② SLOPE TO CONFORM TO SIDE SLOPES.
 3. ALL BARRIER MEDIANS SHALL BE CONSTRUCTED OF CLASS "A" CONCRETE.
 BID ITEM AND UNIT TO BID
 STANDARD BARRIER MEDIAN TYPE ☆ SQYD
- ☆ = 1 OR 2 OR 3 OR 4 OR 5.



ISOMETRIC VIEW
(NOSE)

KENTUCKY
DEPARTMENT OF HIGHWAYS

STANDARD
BARRIER MEDIAN

STANDARD DRAWING NO. RPM-010-06

SUBMITTED *William P. Hulse* 12-01-15
DIRECTOR, DIVISION OF DESIGN DATE
 APPROVED *[Signature]* 12-01-15
STATE HIGHWAY ENGINEER DATE