
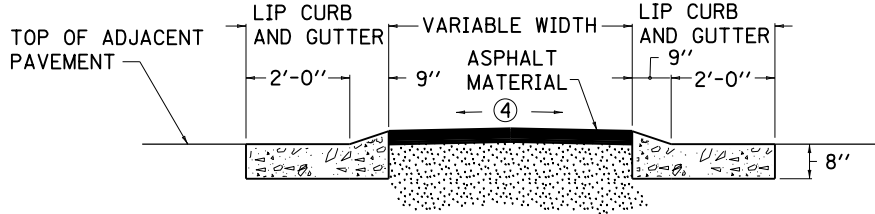


PLAN VIEW

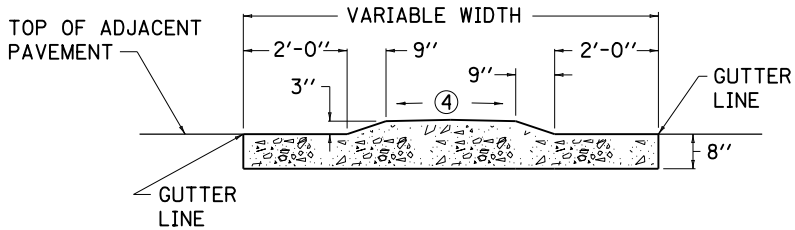

SECTION A-A  
~ NOTES ~

SECTION B-B

BID ITEMS AND UNIT TO BID  
MOUNTABLE MEDIAN TYPE 6A  
LIP CURB AND GUTTER

SQYD  
LF

1. THE BID ITEM PER SQ. YD. BETWEEN POINTS (A) AND (B) SHALL BE "MOUNTABLE MEDIAN TYPE 6A".
2. THE VARIABLE LENGTH MOUNTABLE MEDIAN BETWEEN POINTS (A) AND (B) SHALL MEET THE CURRENT REQUIREMENTS OF STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, CURRENT EDITION.
3. CURB AND GUTTER TERMINATES AT POINT (C) (SEE PLANS).
- ④ CROSS SLOPE OF 2% ON TANGENTS AND PARALLEL PAVEMENT CROSS SLOPE ON SUPERELEVATED SECTIONS.

USE WITH CUR. STD. DWG.  
RPM-100

KENTUCKY  
DEPARTMENT OF HIGHWAYS

MOUNTABLE MEDIAN  
TYPE 6A

STANDARD DRAWING NO. RPM-012-04

SUBMITTED *William P. Galbraith* 12-01-15  
DIRECTOR, DIVISION OF DESIGN DATE  
APPROVED *[Signature]* 12-01-15  
STATE HIGHWAY ENGINEER DATE