




SINGLE INTERSECTIONS

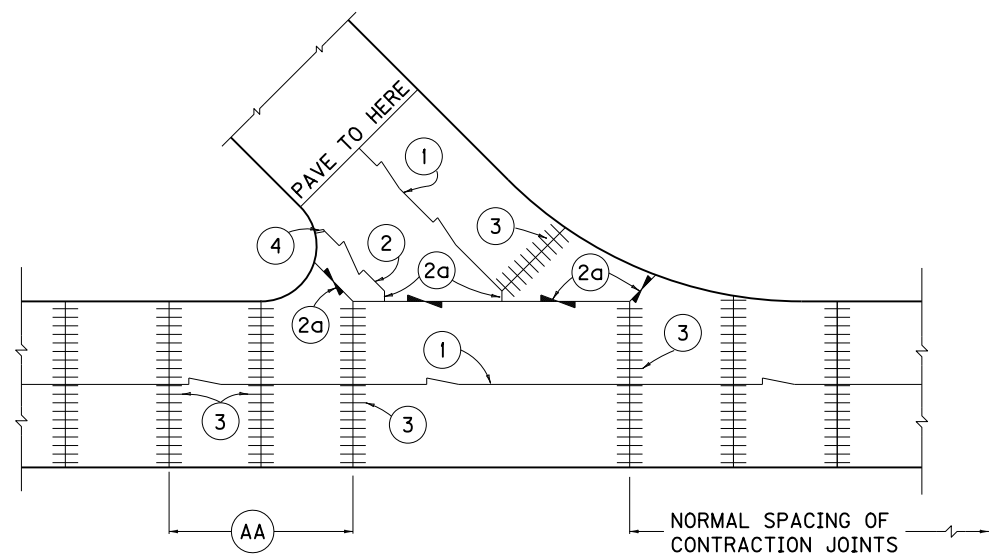


ANGLE INTERSECTION

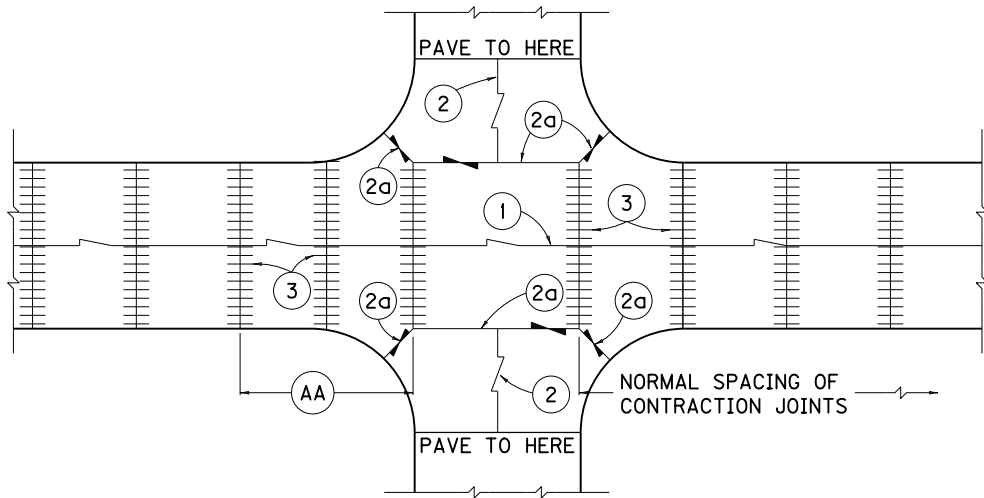

DOUBLE INTERSECTIONS

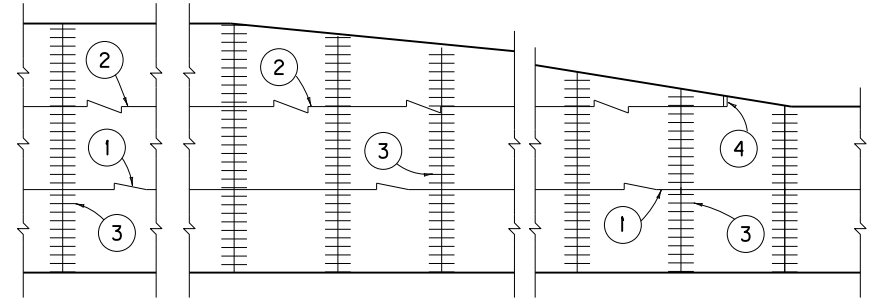

DECELERATING LANE

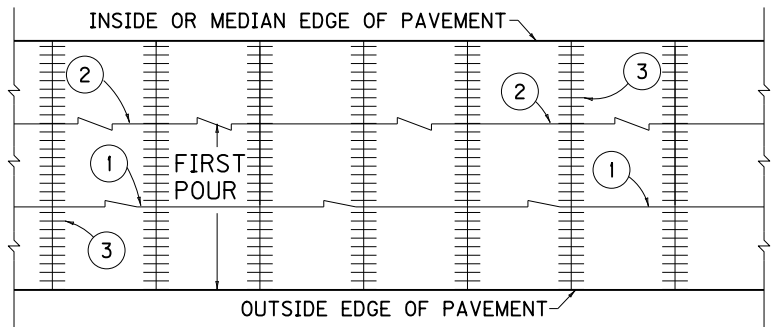

NORMAL THREE LANE PAVEMENT

~ NOTES ~

SEE CUR. STD. DWG. RPS-010 FOR JOINT SYMBOLS AND DETAILS. DRAWINGS ON THIS SHEET ARE DETAILED ON THE PREMISE THAT PAVEMENT CONSTRUCTION WILL BE FROM LEFT TO RIGHT. IF PAVEMENT CONSTRUCTION IS IN THE OPPOSITE DIRECTION, TRANSVERSE JOINT SPACING DETAILS SHALL BE REVERSED END FOR END.

(AA) THIS DISTANCE TO BE EQUALLY DIVIDED WHEN GREATER THAN 20' AND LESS THAN 40'.

USE WITH CUR. STD. DWG. RPS-010

<b>KENTUCKY DEPARTMENT OF HIGHWAYS</b>		
<b>CONCRETE PAVEMENT JOINTS TYPES AND SPACING</b>		
STANDARD DRAWING NO. RPS-031-06		
SUBMITTED	<i>William S. Gullett</i> DIRECTOR, DIVISION OF DESIGN	12-01-15 DATE
APPROVED	<i>[Signature]</i> STATE HIGHWAY ENGINEER	12-01-15 DATE