



JOINT SHAPE FOR
TRANSVERSE SAWED CONTRACTION JOINT

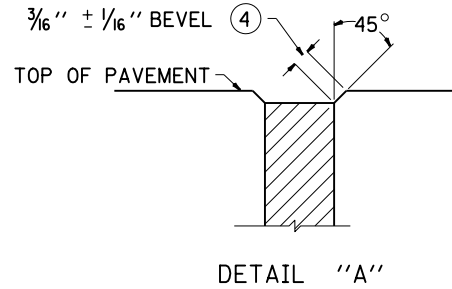


~ NOTES ~

1. PAYMENT FOR ALL WORK SHALL BE INCIDENTAL TO THE UNIT PRICE BID PER SQ. YD. OF PAVEMENT.
- ② THE REMAINING JOINT SHALL BE IN ACCORDANCE WITH CUR. STD. DWGS. RPS-010 AND RPS-020.
3. ALL LONGITUDINAL AND TRANSVERSE SAWED JOINTS SHALL BE CUT TO THE DEPTH SHOWN AND SHALL BE SEALED WITH HOT Poured ELASTIC JOINT SEAL.
- ④ THESE EDGES SHALL BE BEVELED USING A CUTTING OR GRINDING DEVICE .
- ⑤ 1/8" MIN. - 1/4" MAX.
- ⑥ JOINT DEPTH IS T/3 OR 4", WHICHEVER IS LESS.
T = PAVEMENT THICKNESS

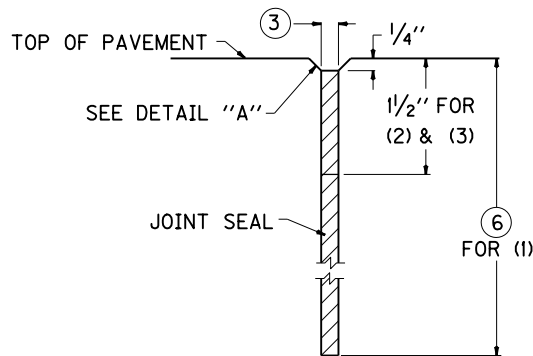

JOINT SHAPE FOR
TRANSVERSE EXPANSION JOINT

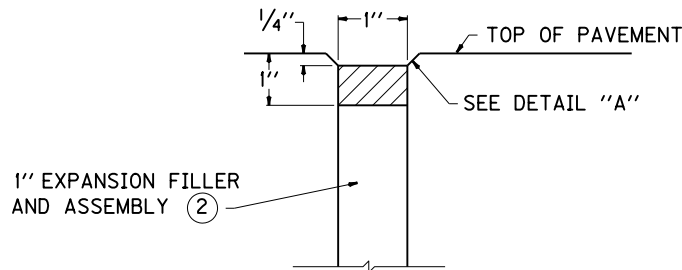

- (1) LONGITUDINAL SAWED JOINT (TIED)
- (2) LONGITUDINAL SAWED CONSTRUCTION JOINT (TIED)
- (3) TRANSVERSE SAWED CONSTRUCTION JOINT (TIED)

USE WITH CUR. STD. DWGS.
RPS-010, RPS-020

KENTUCKY	
DEPARTMENT OF HIGHWAYS	
HOT-POURED ELASTIC JOINT SEALS FOR CONCRETE PAVEMENT	
STANDARD DRAWING NO. RPX-015-04	
SUBMITTED <i>William S. Galbraith</i>	DATE 12-01-15
<small>DIRECTOR, DIVISION OF DESIGN</small>	
APPROVED <i>[Signature]</i>	DATE 12-01-15
<small>STATE HIGHWAY ENGINEER</small>	