



TRANSPORTATION CABINET

Frankfort, Kentucky 40622
www.transportation.ky.gov/

Steven L. Beshear
Governor

Michael W. Hancock, P.E.
Secretary

January 20, 2015

CALL NO. 100
CONTRACT ID NO. 154100
ADDENDUM # 1

Subject: Laurel County, HSIP 0804 (013)
Letting January 30, 2015

- (1) Revised - Note - Page 41 of 127
- (2) Revised - Typical Section - Pages 54-56 of 127
- (3) Revised - Bid Items - Pages 127-127(a) of 127

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in blue ink that reads "Diana Castle Radcliffe".

Diana Castle Radcliffe
Director
Division of Construction Procurement

DR:ks
Enclosures



An Equal Opportunity Employer M/F/D

SPECIAL NOTE FOR TRENCHING

Trench shoulders as shown on the typical section. Reshape and compact excavated material from the trench on the outside edge of the paved shoulder as shown on the typical section. The Department will retain ownership of excess material the Engineer deems suitable for reuse as aggregate and not used to construct the shoulder wedge. Deliver this material to the State Maintenance facility in Laurel County.

Retain possession of materials the Engineer deems unsuitable for reuse and waste the materials off the right-of-way at sites obtained by the Contractor at no additional cost to the Department. See Special Note for Waste and Borrow.


If Trenching is achieved by means other than milling, sawcut the pavement to the desired depth and remove the existing shoulder wedge to create a smooth edge prior to excavating the trench.

The Department will measure "Trenching" in linear feet at the pavement/shoulder edge. The Department will NOT measure saw cutting for payment. The SAWCUT shall be incidental to the bid item TRENCHING. Accept payment at the contract unit price per linear feet as full compensation for all labor, materials, equipment and incidentals for excavating the shoulder trench and reuse, delivery, and/or disposal of the material.

1-3905 Trenching Shoulder Department Excess Material
01/02/2012


**Laurel County
KY 80 Right Turn Lane**

**Typical Section
Sta. 0+00 to 11+40
Sta. 16+40 to 20+30**

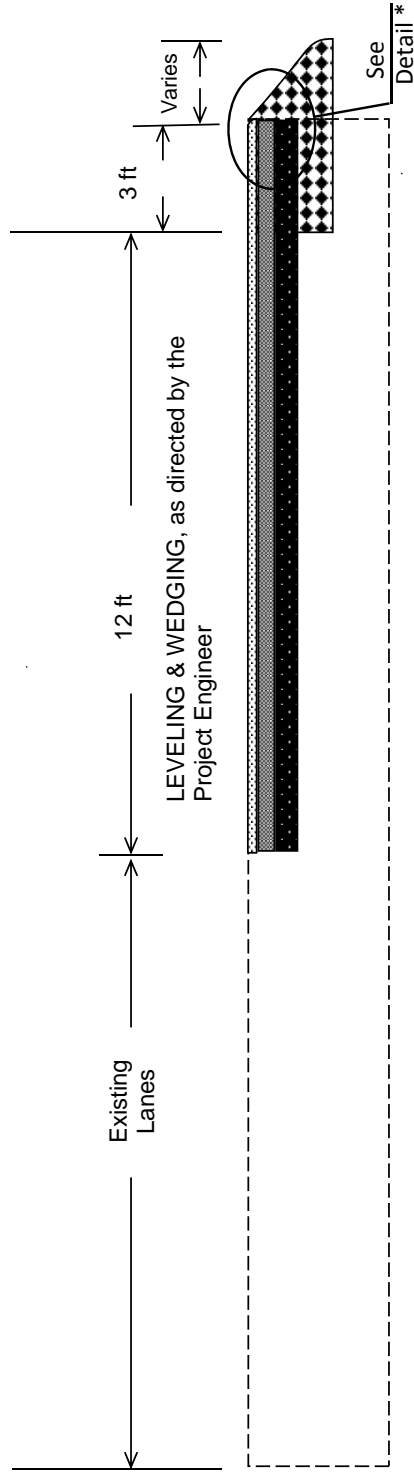

Trenching should be done in a manner to provide a smooth edge, a sub-base of appropriate slopes, and to maintain existing elevation upon completion of final surface.


***Detail**

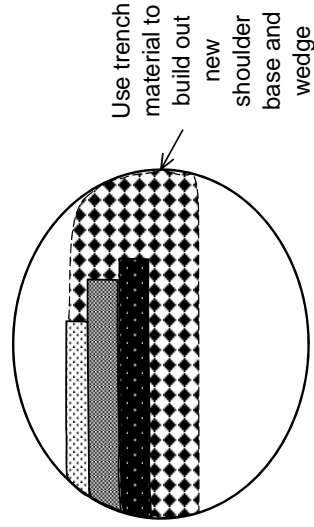

- 9" - Trenching
- 1.25" CL3 Asph Surf 0.38A PG76-22
- 3.75" CL3 Asph Base 0.75D PG76-22
- 4" CL3 Asph Base 1.0D PG64-22


**Laurel County
KY 80 Right Turn Lane**

**Typical Section
Sta. 11+40 to 16+40**

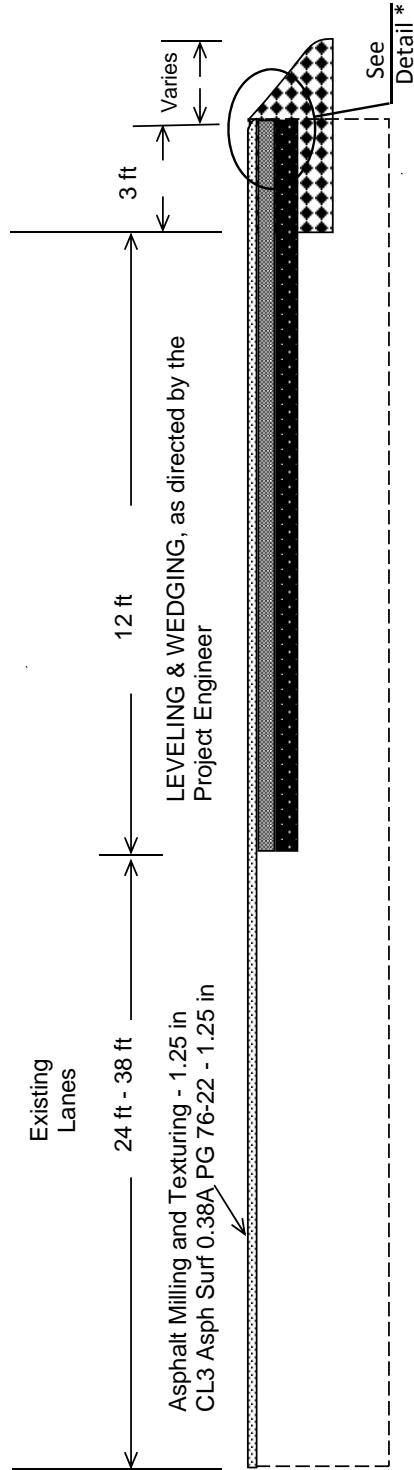

Trenching should be done in a manner to provide a smooth edge, a sub-base of appropriate slopes, and to maintain existing elevation upon completion of final surface.


***Detail**

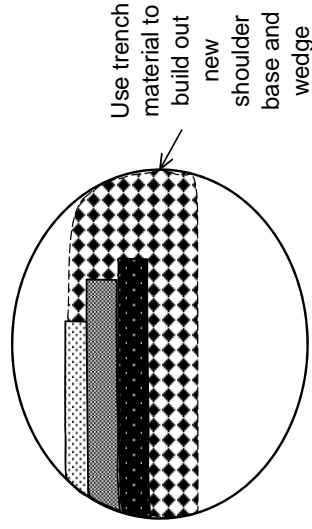

- 1.25" CL3 Asph Surf 0.38A PG76-22
 - 3.75" CL3 Asph Base 0.75D PG76-22
 - 4" CL3 Asph Base 1.0D PG64-22
- 9" - Trenching

**Laurel County
KY 80 Right Turn Lane**

**Typical Section
Sta. 20+30 to 26+70**

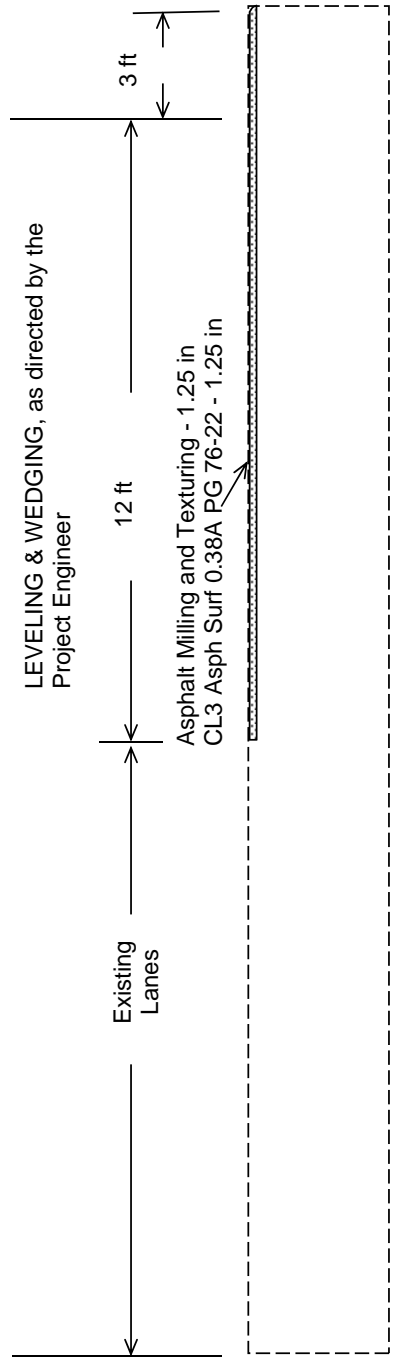

PROPOSAL BID ITEMS

154100

Report Date 1/20/15

Section: 0001 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00194		LEVELING & WEDGING PG76-22 (REVISED: 1-20-15)	100.00	TON		\$	
0011	00214		CL3 ASPH BASE 1.00D PG64-22 (ADDED: 1-20-15)	980.00	TON		\$	
0020	00225		CL3 ASPH BASE 0.75D PG76-22 (REVISED: 1-20-15)	920.00	TON		\$	
0030	01987		DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE	4.00	EACH		\$	
0040	02351		GUARDRAIL-STEEL W BEAM-S FACE	300.00	LF		\$	
0050	02367		GUARDRAIL END TREATMENT TYPE 1	1.00	EACH		\$	
0060	02381		REMOVE GUARDRAIL	320.00	LF		\$	
0070	02562		TEMPORARY SIGNS	230.00	SQFT		\$	
0080	02650		MAINTAIN & CONTROL TRAFFIC	1.00	LS		\$	
0090	02671		PORTABLE CHANGEABLE MESSAGE SIGN	1.00	EACH		\$	
0100	02676		MOBILIZATION FOR MILL & TEXT	1.00	LS		\$	
0110	02677		ASPHALT PAVE MILLING & TEXTURING	200.00	TON		\$	
0120	02775		ARROW PANEL	1.00	EACH		\$	
0130	04793		CONDUIT-1 1/4 IN	200.00	LF		\$	
0140	04795		CONDUIT-2 IN	275.00	LF		\$	
0150	04811		ELECTRICAL JUNCTION BOX TYPE B	4.00	EACH		\$	
0160	04820		TRENCHING AND BACKFILLING	500.00	LF		\$	
0170	04830		LOOP WIRE	800.00	LF		\$	
0180	04845		CABLE-NO. 14/7C	1,450.00	LF		\$	
0190	04850		CABLE-NO. 14/1 PAIR	4,000.00	LF		\$	
0200	04885		MESSENGER-10800 LB	450.00	LF		\$	
0210	04895		LOOP SAW SLOT AND FILL	330.00	LF		\$	
0220	04932		INSTALL STEEL STRAIN POLE	1.00	EACH		\$	
0230	04950		REMOVE SIGNAL EQUIPMENT	1.00	EACH		\$	
0240	06510		PAVE STRIPING-TEMP PAINT-4 IN	1,000.00	LF		\$	
0250	06514		PAVE STRIPING-PERM PAINT-4 IN	5,500.00	LF		\$	
0260	06568		PAVE MARKING-THERMO STOP BAR-24IN	55.00	LF		\$	
0270	06574		PAVE MARKING-THERMO CURV ARROW (REVISED: 1-20-15)	10.00	EACH		\$	
0280	06575		PAVE MARKING-THERMO COMB ARROW (REVISED: 1-20-15)	18.00	EACH		\$	
0290	08100		CONCRETE-CLASS A	5.00	CUYD		\$	
0300	10020NS		FUEL ADJUSTMENT	4,786.00	DOLL	\$1.00	\$	\$4,786.00
0310	10030NS		ASPHALT ADJUSTMENT	12,022.00	DOLL	\$1.00	\$	\$12,022.00
0320	20093NS835		INSTALL PEDESTRIAN HEAD-LED	1.00	EACH		\$	
0330	20188NS835		INSTALL LED SIGNAL-3 SECTION	7.00	EACH		\$	
0340	20266ES835		INSTALL LED SIGNAL- 4 SECTION	2.00	EACH		\$	
0350	06427		TRENCHING (REVISED: 1-20-15)	2,100.00	LF		\$	
0360	21743NN		INSTALL PEDESTRIAN DETECTOR	1.00	EACH		\$	
0370	00336		CL3 ASPH SURF 0.38A PG76-22 (REVISED: 1-20-15)	500.00	TON		\$	
0380	23222EC		INSTALL SIGNAL PEDESTAL	1.00	EACH		\$	
0390	23235EC		INSTALL PEDESTAL POST	1.00	EACH		\$	
0400	23261EC		PAVE MARK-THERMO-X-WALK-24 IN	55.00	LF		\$	

154100

PROPOSAL BID ITEMS

Page 2 of 2

Report Date 1/20/15

Section: 0002 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0410	02569		DEMOBILIZATION	1.00	LS		\$	