



Matthew G. Bevin
Governor

**COMMONWEALTH OF KENTUCKY
TRANSPORTATION CABINET**

Frankfort, Kentucky 40622
www.transportation.ky.gov/

Greg Thomas
Secretary

October 17, 2018

CALL NO. 103
CONTRACT ID NO. 181233
ADDENDUM # 1

Subject: MADISON COUNTY, STP BRO 4212 (053)
Letting October 26, 2018

- (1) Revised - Proposal Bid Items - Pages 106-107 of 107
- (2) Revised - Plan Sheets - R2A, R3, and R4

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in black ink that reads "Rachel Mills".

Rachel Mills, P.E.
Director
Division of Construction Procurement

RM:mr
Enclosures



An Equal Opportunity Employer M/F/D

PROPOSAL BID ITEMS

181233

Page 1 of 2

Report Date 10/17/18

Section: 0001 - PAVING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00003		CRUSHED STONE BASE	1,470.00	TON		\$	
0020	00100		ASPHALT SEAL AGGREGATE	13.10	TON		\$	
0030	00103		ASPHALT SEAL COAT	1.57	TON		\$	
0040	00190		LEVELING & WEDGING PG64-22	15.00	TON		\$	
0050	00221		CL2 ASPH BASE 0.75D PG64-22	857.00	TON		\$	
0060	00301		CL2 ASPH SURF 0.38D PG64-22	207.00	TON		\$	
0070	00356		ASPHALT MATERIAL FOR TACK	4.40	TON		\$	
0080	02676		MOBILIZATION FOR MILL & TEXT	1.00	LS		\$	
0090	02677		ASPHALT PAVE MILLING & TEXTURING	46.00	TON		\$	

Section: 0002 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0100	01987		DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE	3.00	EACH		\$	
0110	02014		BARRICADE-TYPE III	10.00	EACH		\$	
0120	02159		TEMP DITCH	350.00	LF		\$	
0130	02160		CLEAN TEMP DITCH	350.00	LF		\$	
0140	02200		ROADWAY EXCAVATION	1,395.00	CUYD		\$	
0150	02242		WATER (FOR DUST CONTROL)	7.00	MGAL		\$	
0160	02351		GUARDRAIL-STEEL W BEAM-S FACE	150.00	LF		\$	
0170	02355		GUARDRAIL-STEEL W BEAM-S FACE A	100.00	LF		\$	
0180	02360		GUARDRAIL TERMINAL SECTION NO 1	2.00	EACH		\$	
0190	02367		GUARDRAIL END TREATMENT TYPE 1	1.00	EACH		\$	
0200	02381		REMOVE GUARDRAIL	416.00	LF		\$	
0210	02391		GUARDRAIL END TREATMENT TYPE 4A	1.00	EACH		\$	
0220	02429		RIGHT-OF-WAY MONUMENT TYPE 1	2.00	EACH		\$	
0230	02432		WITNESS POST	2.00	EACH		\$	
0240	02545		CLEARING AND GRUBBING (APPROXIMATELY 1.64 ACRES)	1.00	LS		\$	
0250	02562		TEMPORARY SIGNS	498.00	SQFT		\$	
0260	02585		EDGE KEY	62.00	LF		\$	
0270	02650		MAINTAIN & CONTROL TRAFFIC	1.00	LS		\$	
0280	02671		PORTABLE CHANGEABLE MESSAGE SIGN	2.00	EACH		\$	
0290	02701		TEMP SILT FENCE	350.00	LF		\$	
0300	02703		SILT TRAP TYPE A	5.00	EACH		\$	
0310	02704		SILT TRAP TYPE B	5.00	EACH		\$	
0320	02706		CLEAN SILT TRAP TYPE A	5.00	EACH		\$	
0330	02707		CLEAN SILT TRAP TYPE B	5.00	EACH		\$	
0340	02726		STAKING	1.00	LS		\$	
0350	02731		REMOVE STRUCTURE (24-LF SINGLE SPAN BRIDGE)	1.00	LS		\$	
0360	05950		EROSION CONTROL BLANKET	317.00	SQYD		\$	
0370	05952		TEMP MULCH	3,122.00	SQYD		\$	
0380	05953		TEMP SEEDING AND PROTECTION	3,122.00	SQYD		\$	
0390	05963		INITIAL FERTILIZER	.15	TON		\$	

PROPOSAL BID ITEMS

181233

Page 2 of 2

Report Date 10/17/18

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0400	05964		20-10-10 FERTILIZER	.25	TON		\$	
0410	05985		SEEDING AND PROTECTION	4,683.00	SQYD		\$	
0420	05989		SPECIAL SEEDING CROWN VETCH	939.00	SQYD		\$	
0430	05992		AGRICULTURAL LIMESTONE	3.00	TON		\$	
0440	06510		PAVE STRIPING-TEMP PAINT-4 IN	600.00	LF		\$	
0450	06514		PAVE STRIPING-PERM PAINT-4 IN	2,684.00	LF		\$	
0460	06568		PAVE MARKING-THERMO STOP BAR-24IN	17.00	LF		\$	
0470	08002		STRUCTURE EXCAV-SOLID ROCK	36.00	CUYD		\$	
0480	08003		FOUNDATION PREPARATION	1.00	LS		\$	
0490	08801		GUARDRAIL-STEEL W BEAM-S FACE BR	56.00	LF		\$	
0500	20191ED		OBJECT MARKER TY 3	1.00	EACH		\$	
0510	20430ED		SAW CUT	60.00	LF		\$	
0520	21804EN		3-SIDED CULVERT (REVISED: 10-17-18)	40.00	LF		\$	
0530	23274EN11F		TURF REINFORCEMENT MAT 1	23.00	SQYD		\$	

Section: 0003 - DRAINAGE


LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0540	00441		ENTRANCE PIPE-18 IN	60.00	LF		\$	

Section: 0004 - SIGNING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0550	06406		SBM ALUM SHEET SIGNS .080 IN	94.00	SQFT		\$	
0560	06410		STEEL POST TYPE 1	168.00	LF		\$	
0570	24631EC		BARCODE SIGN INVENTORY	25.00	EACH		\$	


Section: 0005 - DEMOBILIZATION &/OR MOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0580	02569		DEMOBILIZATION	1.00	LS		\$	

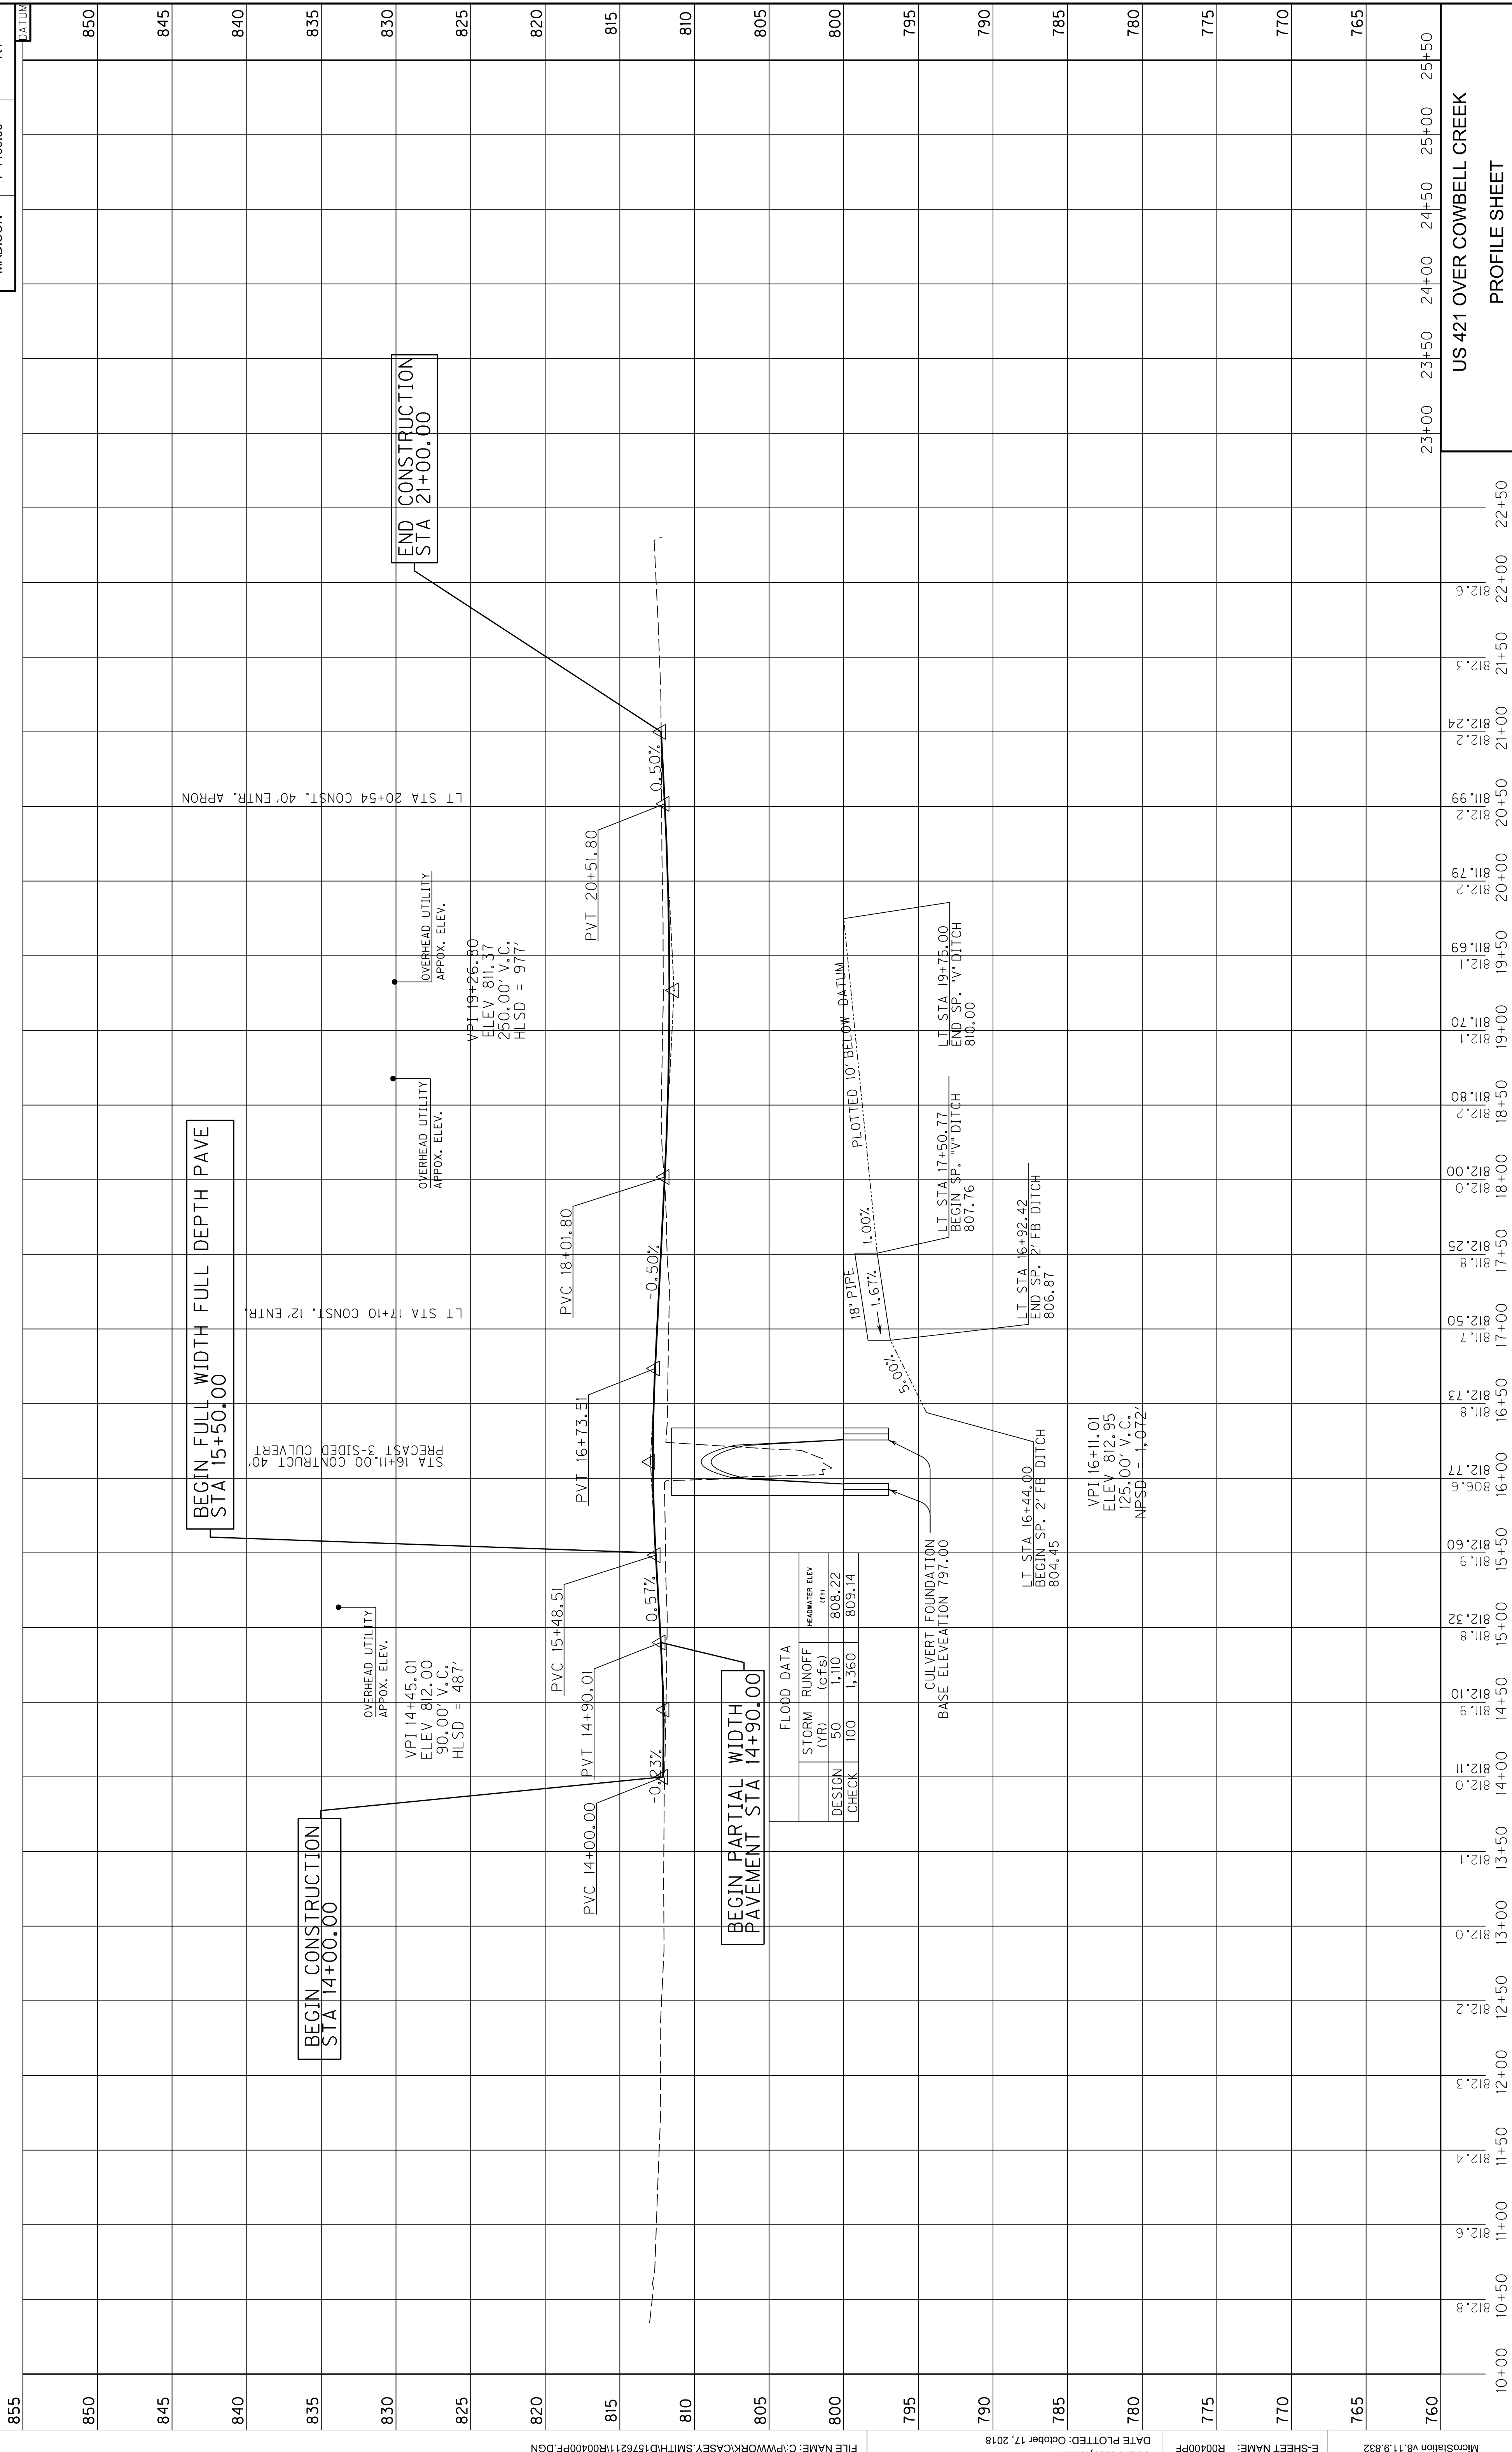

FLOOD DATA			
STORM (YR)	RUNOFF (CFS)	HEADWATER ELEV (FT)	
DESIGN 50	1,110	808.22	
CHECK 100	1,360	809.14	

Station	Elevation	Station	Elevation
10+00	812.8	17+00	811.7
11+00	812.6	17+50	812.5
12+00	812.3	18+00	812.0
13+00	812.0	18+50	812.2
14+00	812.1	19+00	812.1
14+50	811.9	19+50	811.6
15+00	811.8	20+00	812.2
15+50	811.9	20+50	812.2
16+00	812.7	21+00	812.2
16+50	812.6	21+50	812.3
17+00	811.7	22+00	812.6
17+50	811.8	23+00	
18+00	812.0	24+00	
18+50	812.2	25+00	
19+00	812.1	25+50	
19+50	811.6		
20+00	812.2		
20+50	811.9		
21+00	812.2		
21+50	812.3		
22+00	812.6		

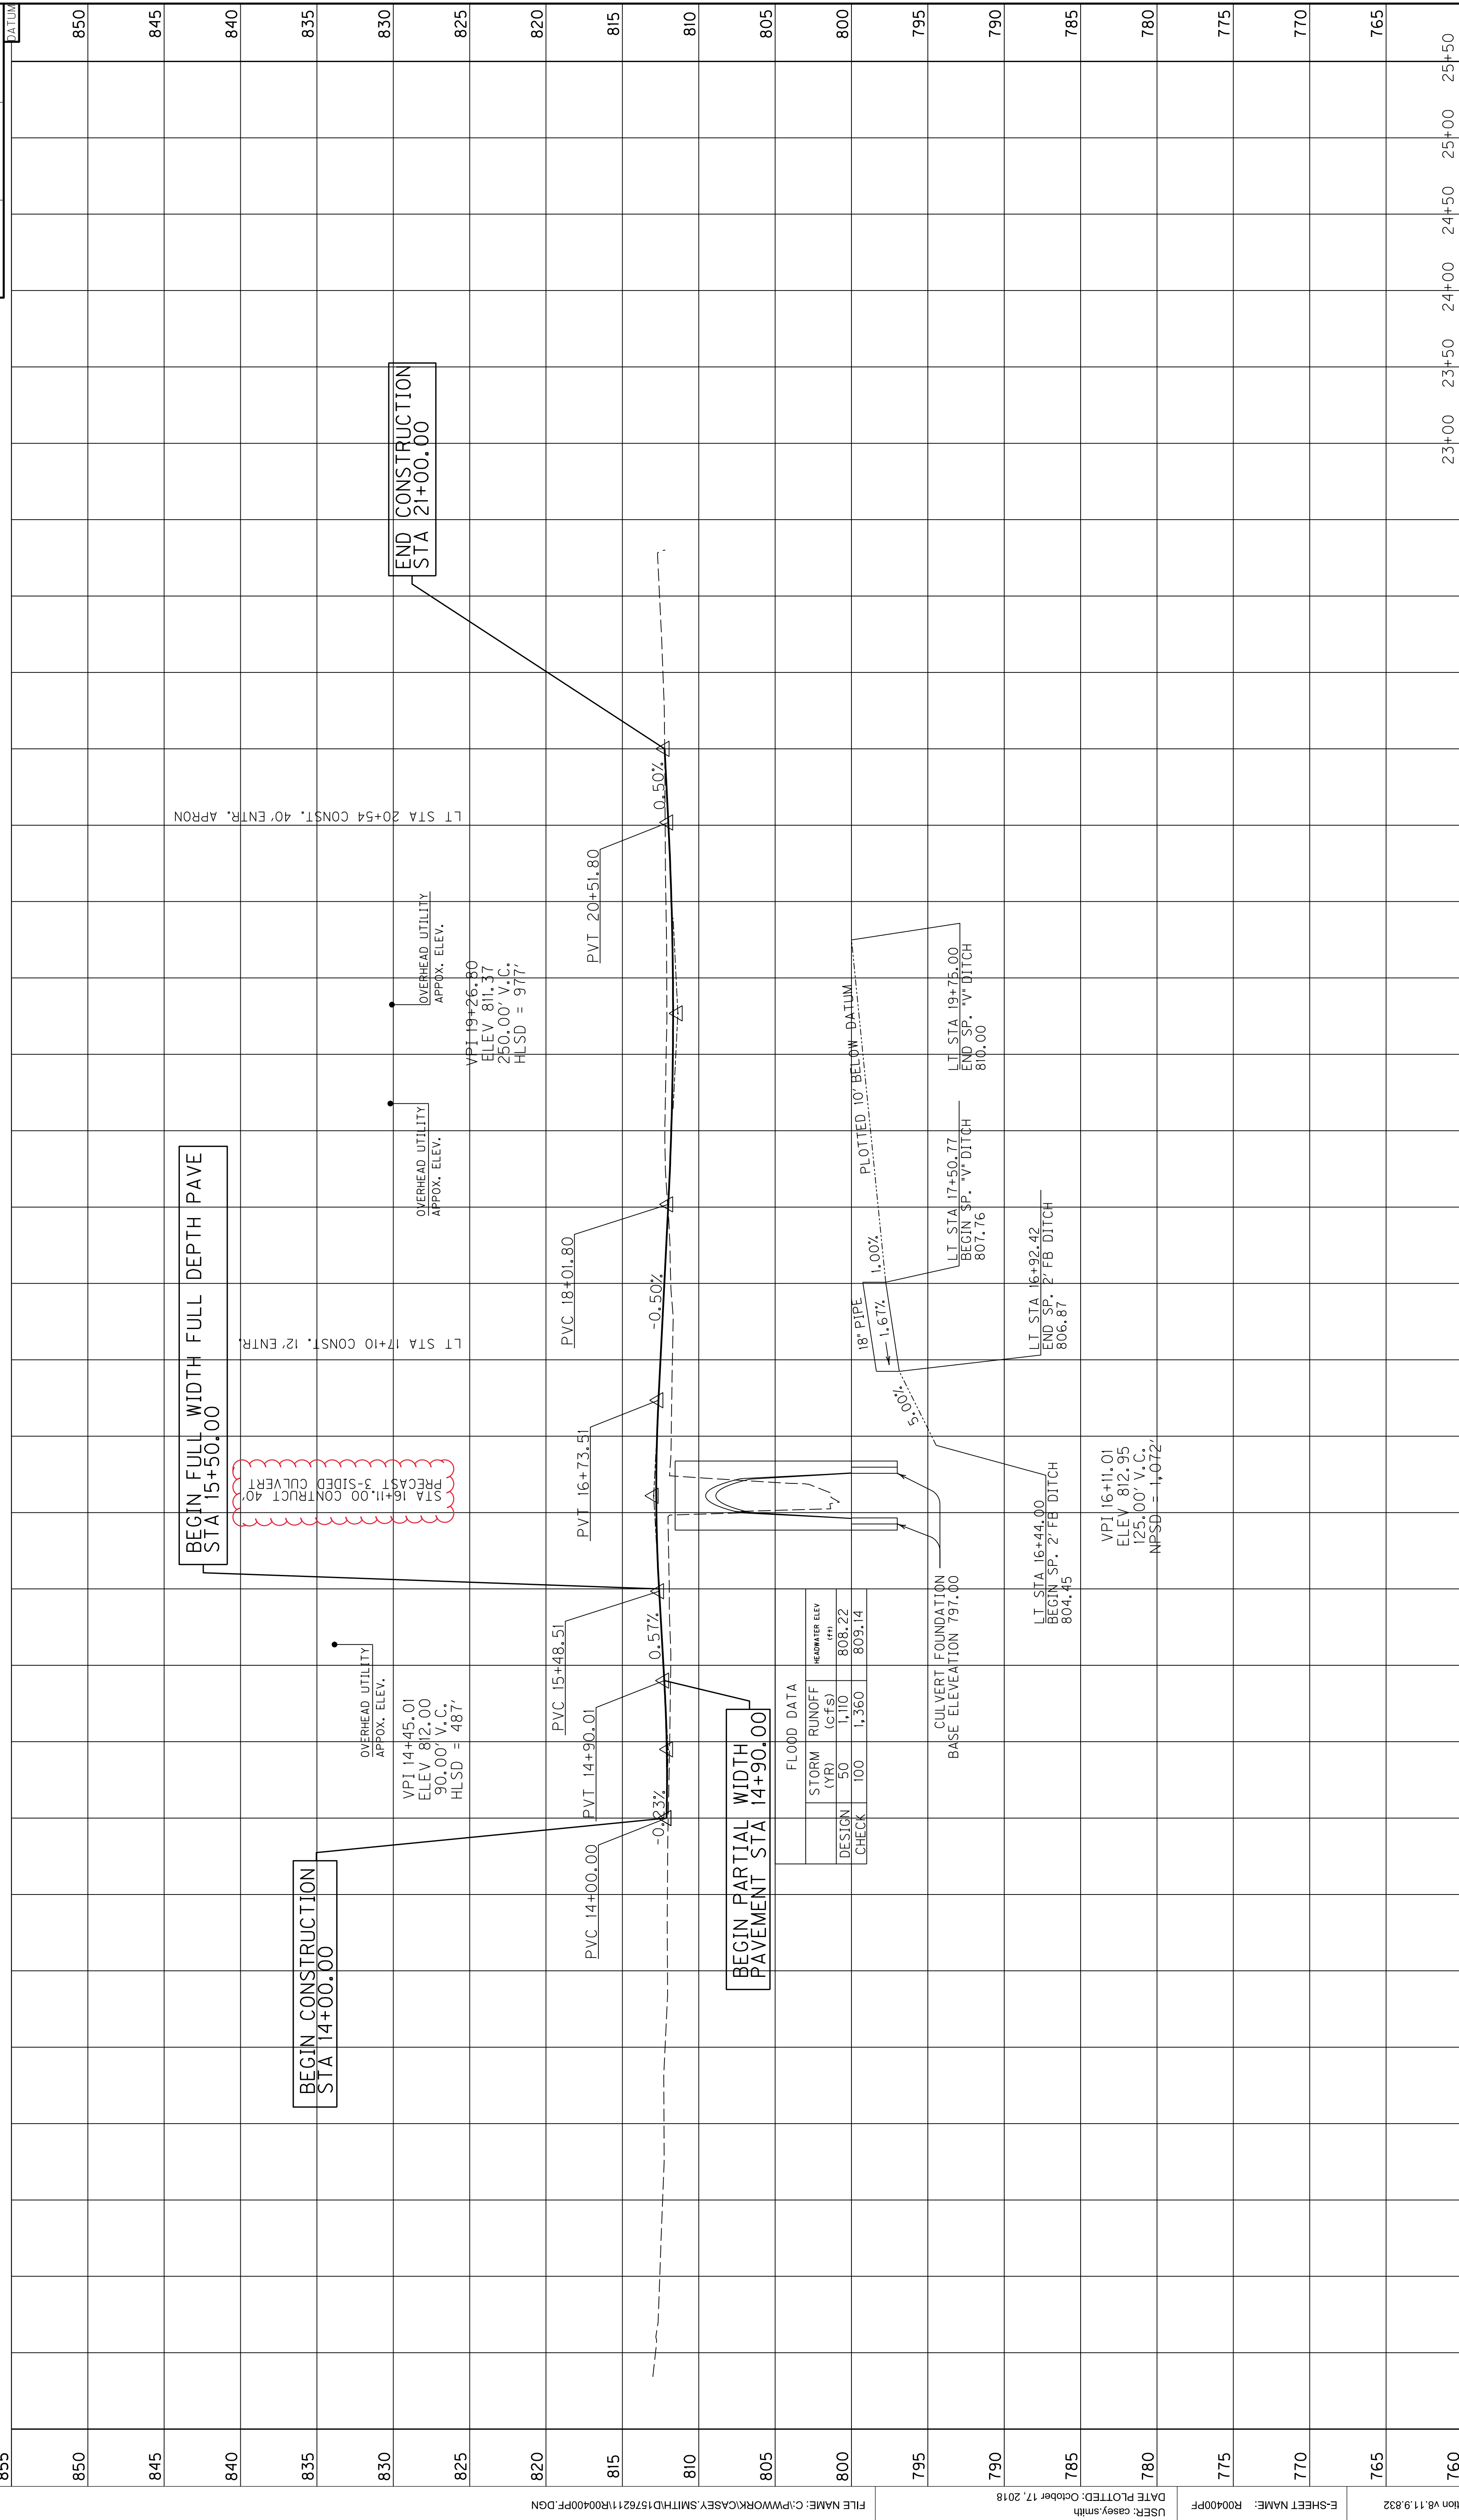

Station	Elevation
10+00	812.8
11+00	812.6
11+50	812.4
12+00	812.3
12+50	812.2
13+00	812.0
13+50	812.1
14+00	812.0
14+10	811.9
14+50	812.10
15+00	811.8
15+10	811.9
15+50	812.60
16+00	806.6
16+10	812.77
16+50	811.8
17+00	811.7
17+50	812.50
18+00	812.25
18+50	812.0
19+00	812.1
19+50	811.69
20+00	812.2
20+50	811.99
21+00	812.24
21+50	812.3
22+00	812.6
23+00	
23+50	
24+00	
24+50	
25+00	
25+50	

US 421 OVER COWBELL CREEK
PROFILE SHEET