



Andy Beshear
GOVERNOR

TRANSPORTATION CABINET

200 Mero Street
Frankfort, Kentucky 40601

Jim Gray
SECRETARY

July 11, 2023

CALL NO. 106
CONTRACT ID NO. 235313
ADDENDUM # 1

Subject: Fulton County, STP BRZ 9030 (416)
Letting July 20, 2023

- (1) Revised - Cross Sections - Pages 66-71 of 158
- (2) Revised - Special Notes - Pages 77-88 of 158
- (3) Revised - Omit Proposal Pages 89-99
- (4) Revised - Proposal Bid Items - Page 158 of 158

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.




Sincerely,

Rachel Mills,

A handwritten signature in black ink that reads "Rachel Mills".

Rachel Mills, P.E.
Director
Division of Construction Procurement

RM:mr
Enclosures

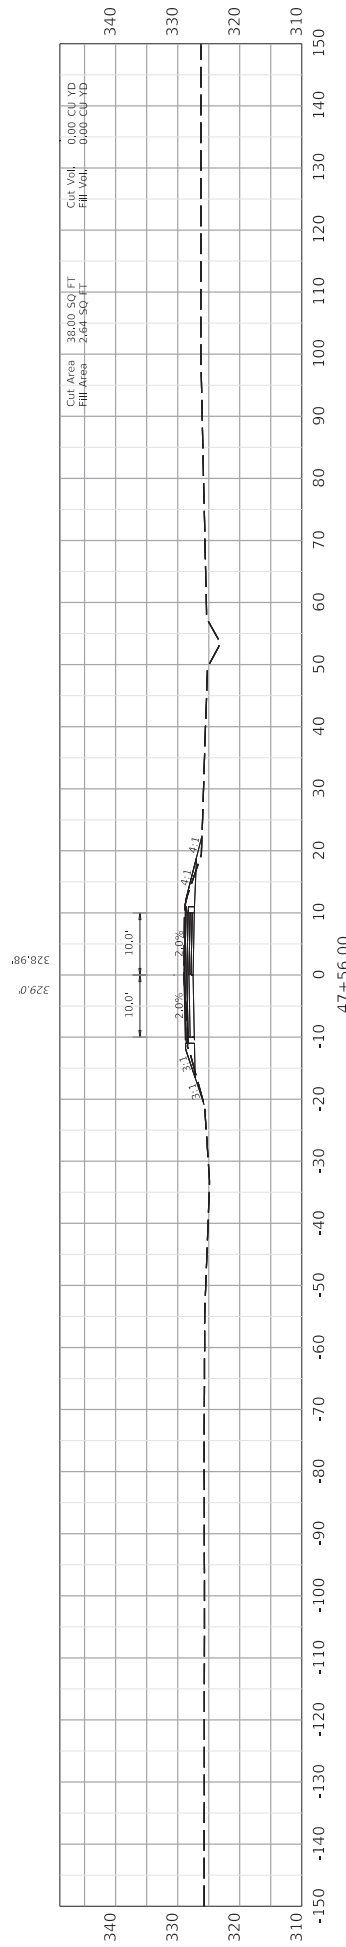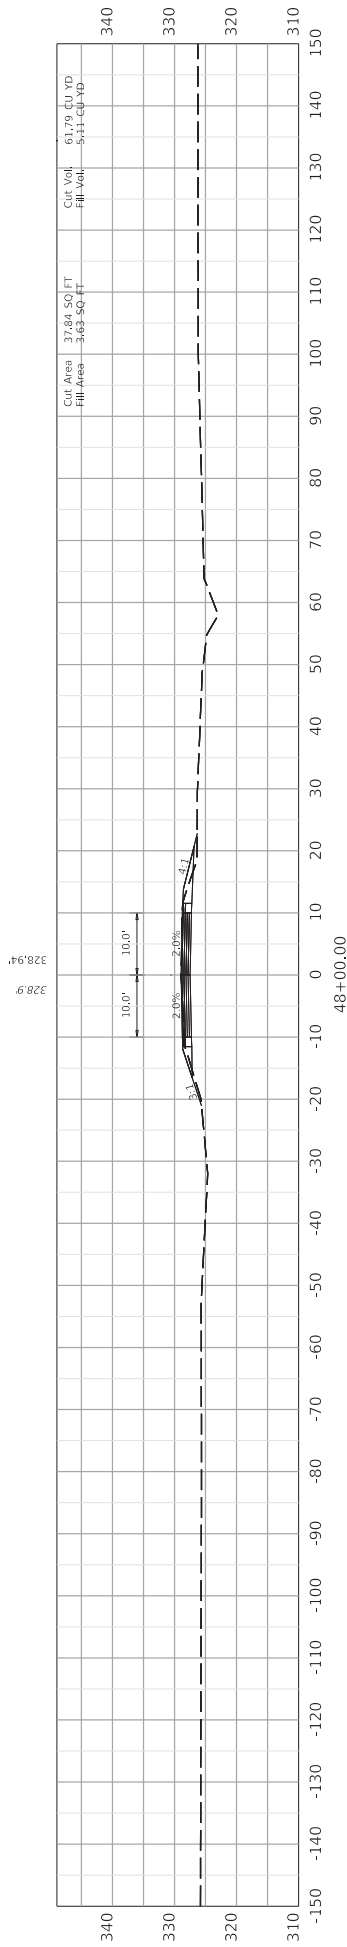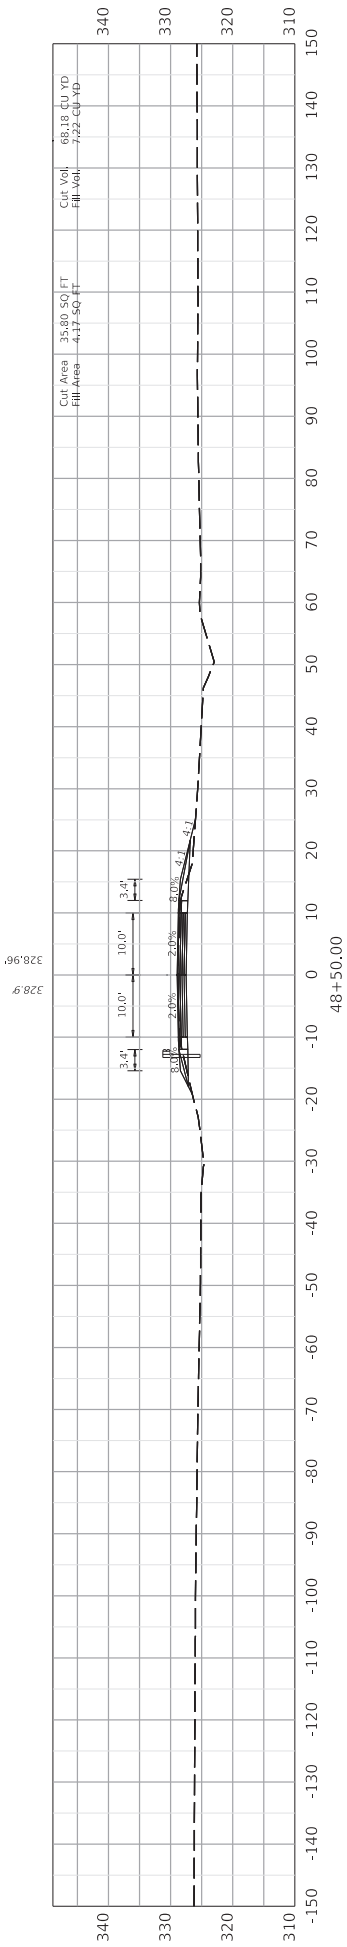

BEEN CONSTRUCTION



HORIZONTAL SCALE: 1" = 10'

STA 47+56 TO STA 48+50

ITEM NO. 01-101.16.00
SHEET NO. X001

COMMONWEALTH OF KENTUCKY
DEPARTMENT OF HIGHWAYS


DRAWING TITLE: KY 166 OVER MUD CREEK

FILE NAME: C:\BMS\B3\454\2008794603_10116_01_CROSS SECTIONS.DGN

DATE PLOTTED: 9/7/2015 7:08:02 PM

USER: cww@rbs

OpenRoads Designer v10.16.2.87

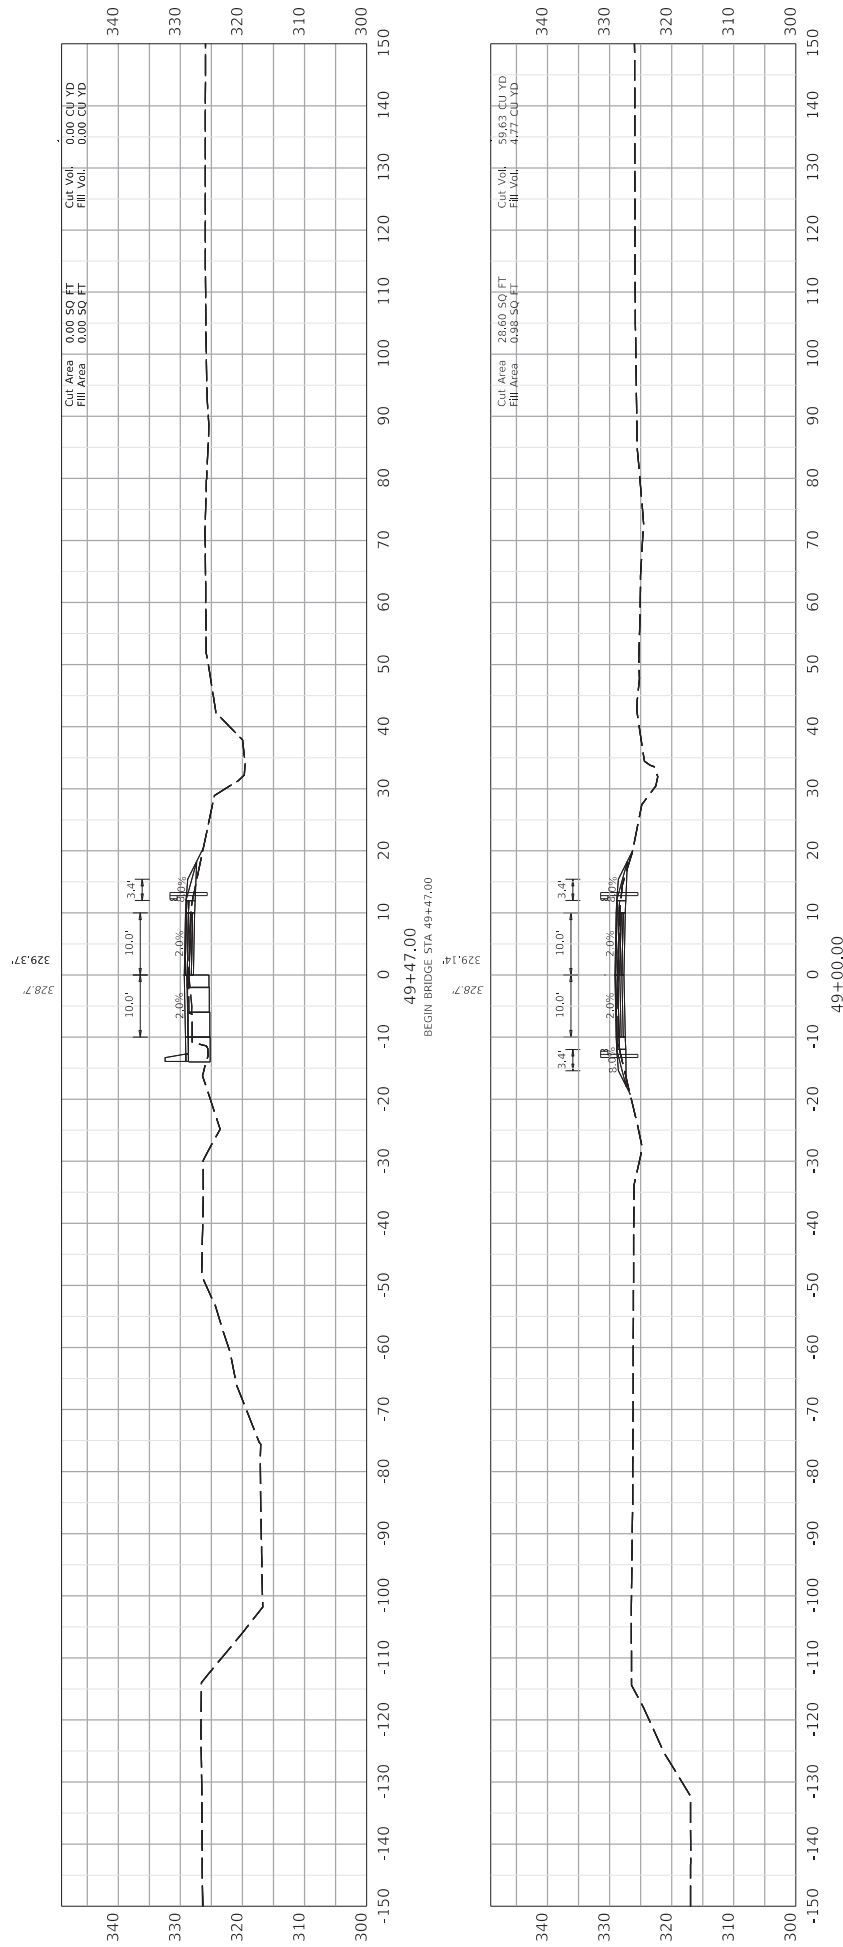

HORIZONTAL SCALE
SCALE: 1" = 10'



STA 49+00 TO STA 49+47

ITEM NO. COUNTY OF FULTON
01-101.16.00
SHEET NO. X002

DRAWING TITLE: KY 166 OVER MUD CREEK





COMMONWEALTH OF KENTUCKY
DEPARTMENT OF HIGHWAYS



DATE PLOTTED: 9/7/2015 7:08:02 PM
USER: cwalkers

FILE NAME: C:\BNSW\BNSW\420200794603_10116_001_CROSS SECTIONS.DGN

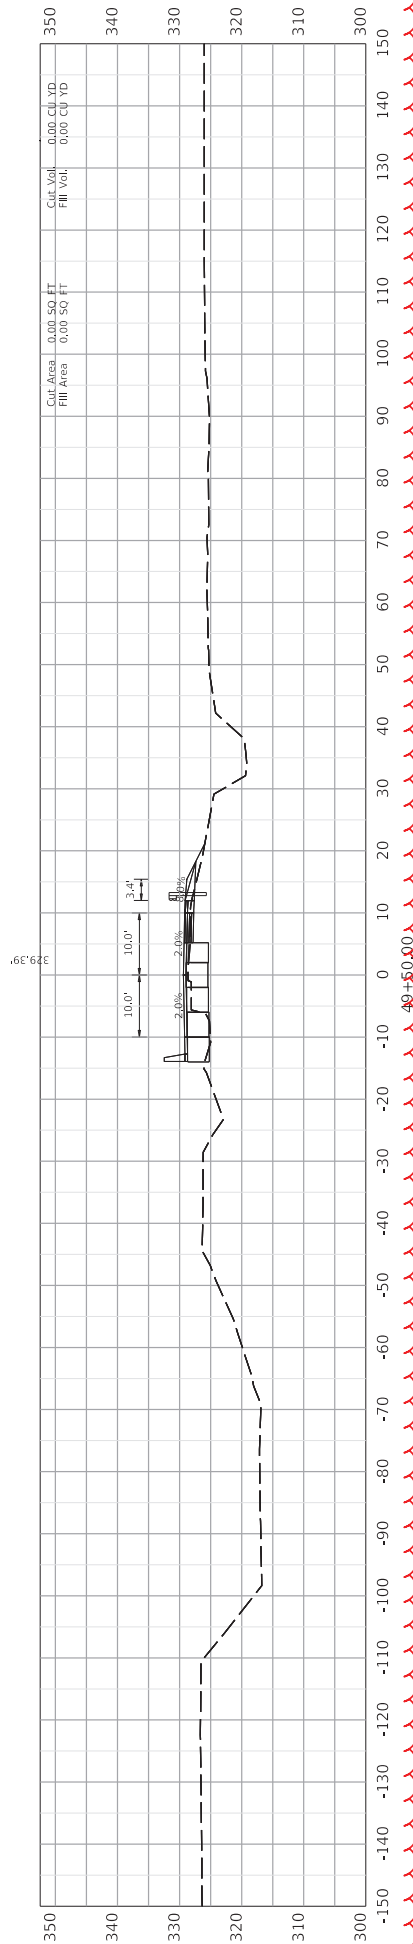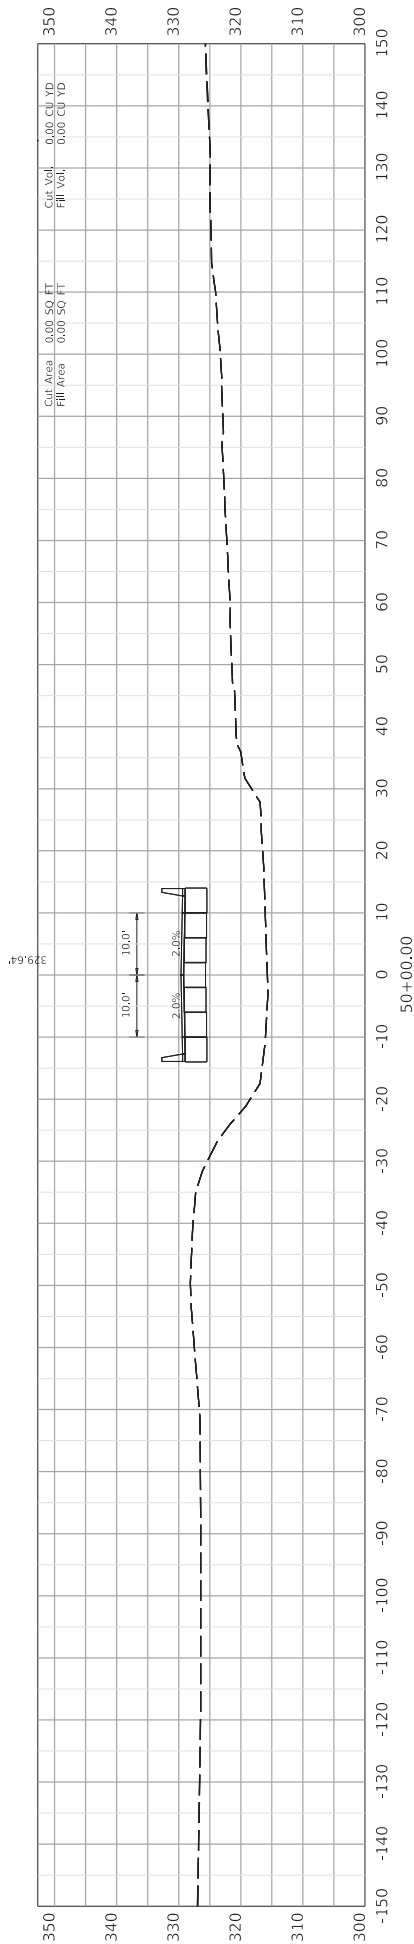

HORIZONTAL SCALE
SCALE: 1" = 10'



STA 49+50 TO STA 50+00

ITEM NO. 01-101.16.00
SHEET NO. X003

COUNTY OF FULTON




COMMONWEALTH OF KENTUCKY
DEPARTMENT OF HIGHWAYS

DRAWING TITLE: KY 166 OVER MUD CREEK


FILE NAME: C:\BNSW\3454\420208794\603_10116_01_CROSS SECTIONS.DGN
DATE PLOTTED: 9/7/2015 7:08:52 PM
USER: cww@rbs



OpenRoads Designer v10.16.2.87

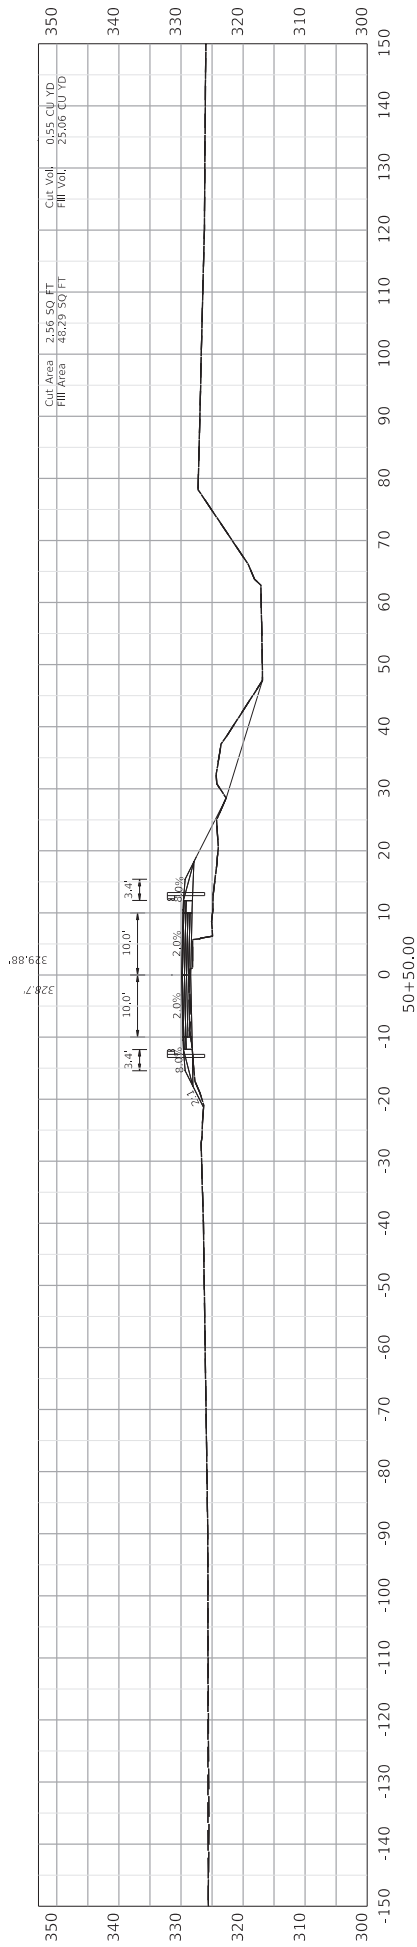

END BRIDGE STA 50+39.00

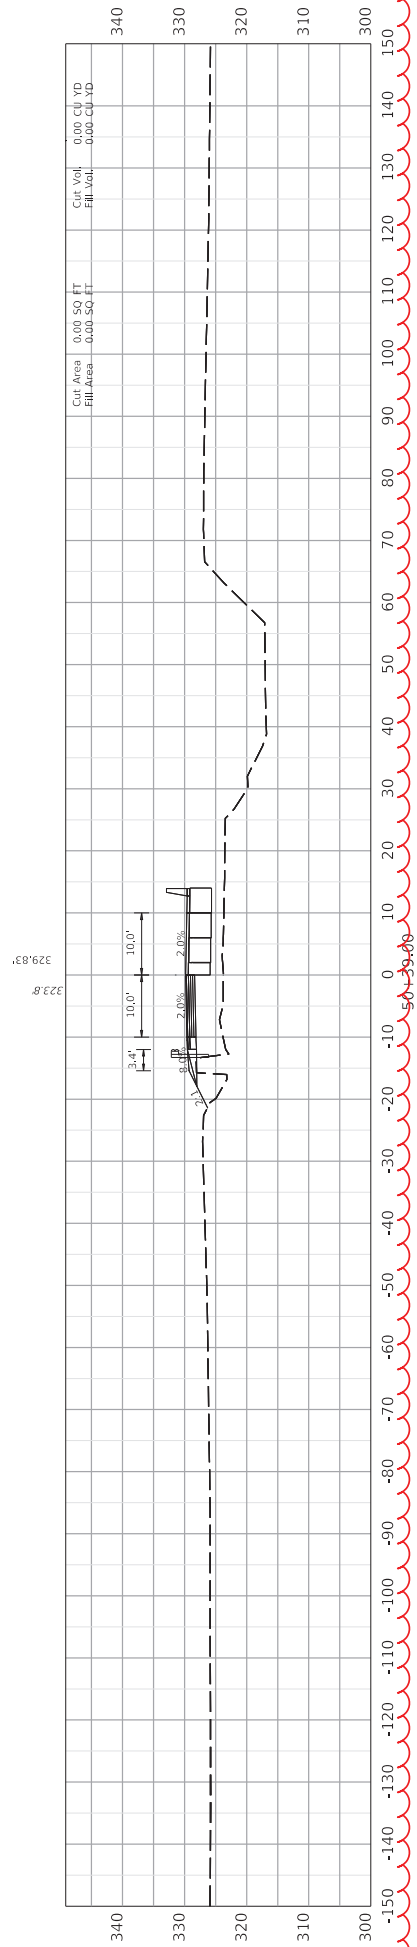

ITEM NO. COUNTY OF
01-10116.00 FULTON
SHEET NO. X004

STA 50+39 TO STA 50+50



HORIZONTAL SCALE
SCALE: 1" = 10'

FILE NAME: C:\BRS\BRS\454\420208794603_10116_04_CROSS SECTIONS.DGN



DRAWING TITLE: KY 166 OVER MUD CREEK

DATE PLOTTED: 9/7/2015 7:06:52 PM

USER: cwwrks



OpenRoads Designer v10.10.2.87

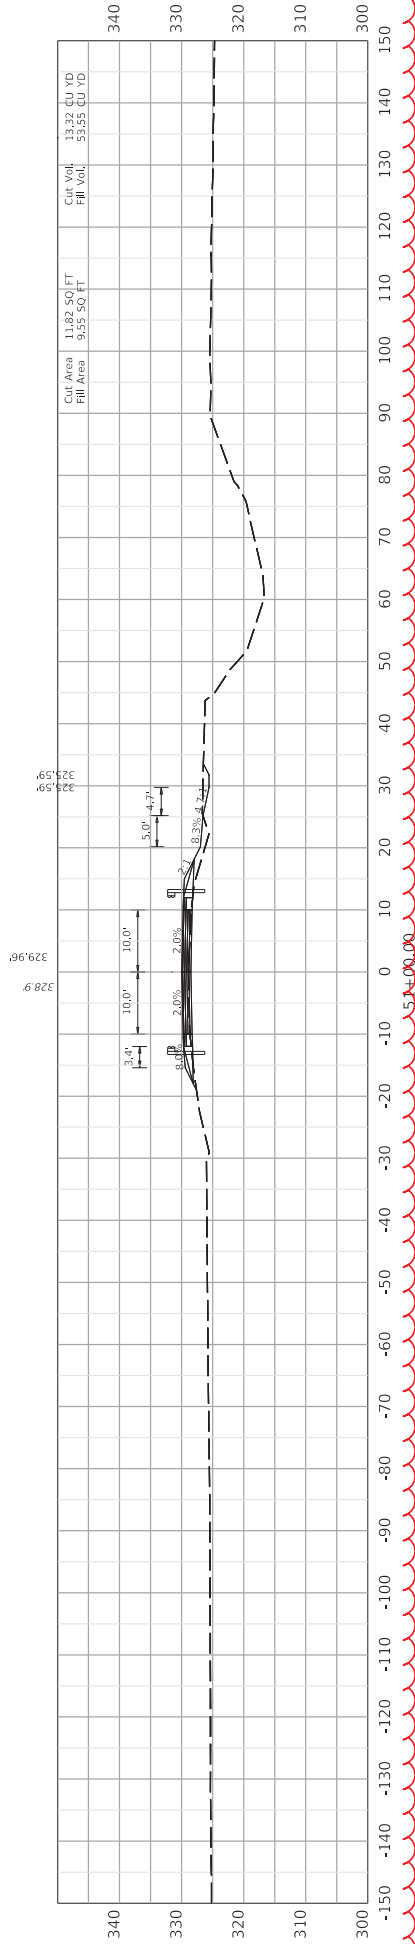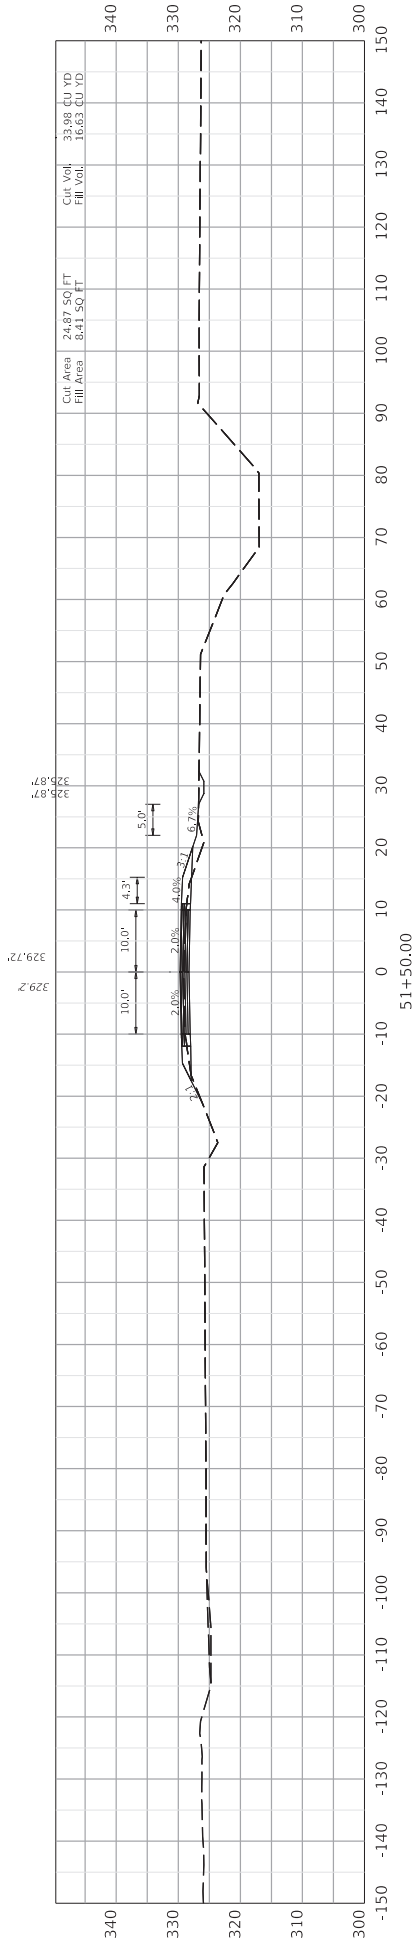

HORIZONTAL SCALE
SCALE: 1" = 10'



STA 51+00 TO STA 51+50

ITEM NO. 01-101.600
SHEET NO. X005
COUNTY OF FULTON

DRAWING TITLE: KY 166 OVER MUD CREEK



COMMONWEALTH OF KENTUCKY
DEPARTMENT OF HIGHWAYS




OpenRoads Designer v10.10.2.87
DATE PLOTTED: 9/7/2015 7:08:02 PM
USER: cwwatkins
FILE NAME: C:\BRS\BRS-45-W4202087944603_1011E_04_CROSS SECTIONS.DGN

FULTON COUNTY
STP BRZ 9030 (416)

Earthwork Quantities	
Totals	
Com	= 367.33
Emb	= 157.75

END CONSTRUCTION STA. 52+50.00

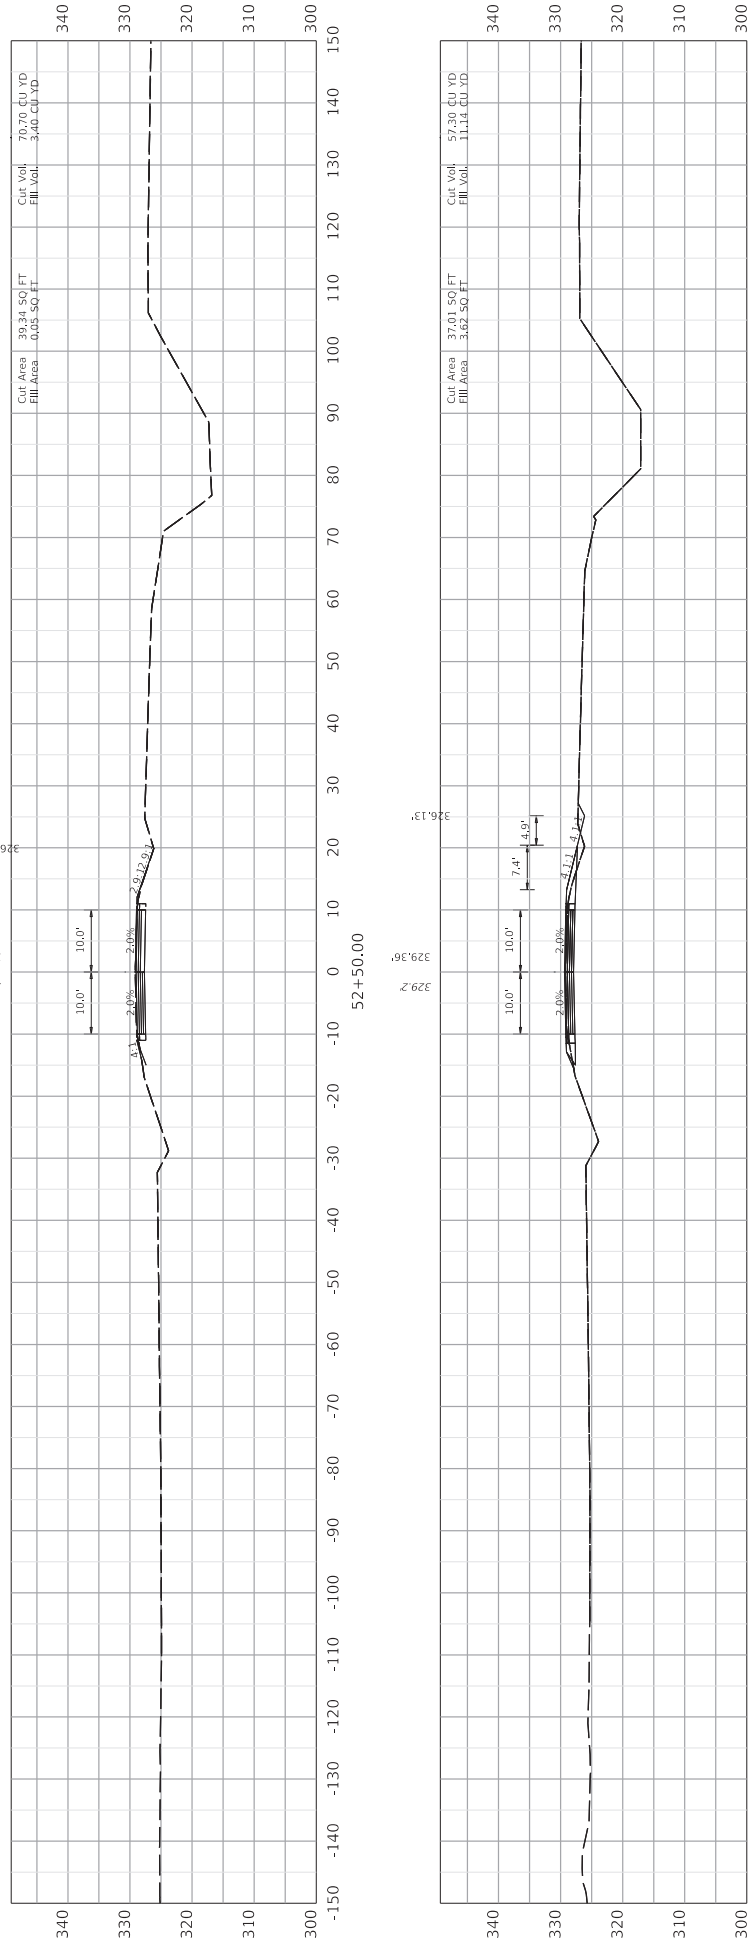

HORIZONTAL SCALE
SCALE: 1" = 10'



STA 52+00 TO STA 52+50

ITEM NO.	01-101.6(00)
COUNTY OF	FULTON
SHEET NO.	X006

DRAWING TITLE: KY 166 OVER MUD CREEK

FILE NAME: C:\BIRSWA\454\42\0208794\601_01\11\01_CROSS SECTIONS.DGN

DATE PLOTTED: 9/7/2015 7:08:02 PM

USER: cwalkers



OpenRoads Designer v10.16.2.87

SPECIAL NOTE

BRIDGE DEMOLITION OR RENOVATION AND ASBESTOS

If the project includes bridge demolition or renovation, the Contractor is required to notify Kentucky Division for Air Quality (KDAQ) via filing of form DEP 7036 (attached) a minimum of 10 days prior to commencement of any bridge demolition or renovation work.

KYTC has completed a pre-demolition asbestos survey of the bridge, the results of which are attached to this note and should be included with the Contractor's notification filed with the KDAQ.

Survey results reveal no regulated asbestos containing material (RACM), no asbestos-specific work practices are required.

Questions regarding this note should be directed to Danny Peake, Director, KYTC Division of Environmental Analysis, 200 Mero Street, Frankfort, KY 40601, Phone (502) 564-7250.



ASBESTOS INSPECTION REPORT

Prepared for: Mike McGregor, PE
Bacon Farmer Workman Engineering & Testing, Inc.

Prepared by: Jared Looney, EIT
AI Number 175162
License Number 74088

Structure ID: 038B00023N, Item I-10116
KY-166 over Mud Creek
Fulton County, Kentucky

Prepared: January 5, 2023

PROJECT DESCRIPTION

Third Rock Consultants, LLC (Third Rock) was retained to conduct a pre-demolition asbestos survey for the above-referenced project. Based on the Bridge Inspection Report from Kentucky Transportation Cabinet, the bridge appears to have been constructed in 1938.

INSPECTION METHODOLOGY

An inspection was conducted on December 19, 2022 in accordance with applicable National Emission Standards for Hazardous Air Pollutants (NESHAP) standards to determine if asbestos-suspect materials are present, including Category I non-friable, Category II non-friable, and friable materials. Upon inspection, the following asbestos-suspect material was observed and sampled:

- Black expansion joint material in horizontal and vertical abutment joints, approximately 155 square feet of material
- Black expansion joint material in horizontal joints at pier caps, approximately 165 square feet of material
- Black expansion joint material in vertical joints of girders and decking above piers, approximately 180 square feet of material

One (1) sample was taken at a representative location from each of the three (3) asbestos-suspect materials that were observed and delivered under chain-of-custody (COC) as Samples I-10116-1, I-10116-2, and I-10116-3, respectively. The COC and photo documentation of each sampling location are attached.

FINDINGS

Laboratory analysis revealed all samples contained less than 1% asbestos. Results are attached.

Note that the Kentucky Division for Air Quality (KDAQ) must be notified at least 10 working days prior to any demolition activities, even though no asbestos-containing material was identified. To notify KDAQ, Form ID 70 (attached) must be completed through the Kentucky Energy and Environment Cabinet's eForms website.

LIMITATIONS

The findings and conclusions of this report are based solely on the conditions present at the structure during the inspection date. Although great care has been taken by Third Rock to conduct a thorough, accurate inspection and report, Third Rock disclaims any and all liability for any errors, omissions, or inaccuracies in the information provided, whether due to inadvertence or otherwise, and for any consequence arising therefrom. The information provided hereunder neither claims to be nor constitutes legal or medical advice. Third Rock shall not be liable for any special, consequential, or exemplary damages resulting, in whole or in part, from the customer's use of the information. Liability on the part of Third Rock is limited to the monetary value paid for this report.

REFERENCES

Google Earth. [Accessed December 27, 2022]. <https://www.google.com/earth>.

Bridge ID 038B00023N, Item No. I-10116

KY-166, Fulton County, Kentucky



1 - IMG_2757 Bridge Surface - Facing W.JPG



2 - IMG_2758 Bridge Below Deck - Facing N.JPG



3 - IMG_2759 Bridge Below Deck - Facing E.JPG



4 - IMG_2760 Abutment Joint - Facing W - Sample I-10116-1.JPG



5 - IMG_2761 Joint at Pier Cap - Facing E - Sample I-10116-2.JPG



6 - IMG_2762 Vertical Joint in Deck and Girder - Facing N - Sample I-10116-3.JPG

CHAIN OF CUSTODY RECORD

Number

Instructions on back

TO BE COMPLETED BY MICROBAC

Turnaround Time

Routine (5 to 7 business days)

RUSH* (notify lab)

Invoice Address

Client Name: Third Rock Consultants, LLC

Address: 2526 Regency Road, STE 180

City, State, Zip: Lexington, KY 40503

Contact: Becky Weatherford

Telephone No.: (859) 977-2000

Send Report via: Mail Fax e-mail (address) jlooney@thirdrockconsultants.com

Location: Various

Sampler Signature: *Jared Looney*

Sampler Phone No.: (859) 977-2000

* Matrix Types: Soil/Solid (S), Sludge, Oil, Wipe, Drinking Water (DW), Groundwater (GW), Surface Water (SW), Waste Water (WW), Other (Specify)

** Preservative Types: (1) HNO3, (2) H2SO4, (3) HCl, (4) NaOH, (5) Zinc Acetate, (6) Methanol, (7) Sodium Bisulfate, (8) Hexane, (U) Unpreserved

REQUESTED ANALYSIS

Lab ID	Client Sample ID	Date Collected	Time Collected	No. of Containers	Matrix	Grab / Comp	Preservative Types **	Asbestos PLM	Lead Paint	Additional Notes
1-10105-1		12/19/12	11:07	1	S	G	-	X		
1-10104-1		12/19/12	11:30	1	S	G	-	X		
1-10144-1		12/19/12	12:00	1	S	G	-	X		
1-10116-1		12/19/12	1:00	1	S	G	-	X		
1-10116-2		12/19/12	1:00	1	S	G	-	X		
1-10116-3		12/19/12	1:00	1	S	G	-	X		
1-10115-1		12/19/12	2:00	1	S	G	-	X		
1-10115-2		12/19/12	2:00	1	S	G	-	X		
1-10146-1		12/19/12	2:30	1	S	G	-	X		

Possible Hazard Identification

Comments

Hazardous Non-Hazardous Radioactive

Sample Disposition

Dispose as appropriate Return Archive

Relinquished By (signature)

hwd jww

Date/Time

12/21/12

Received By (signature)

Crystal Williams

Date/Time

12/19/12

Relinquished By (signature)

Date/Time

Received By (signature)

Date/Time

12L1039 David Lester





Microbac Laboratories, Inc., Louisville

CERTIFICATE OF ANALYSIS

L2L1039

Project Description

SOIL ANALYSIS

For:

Gerry Fister

Third Rock Consultants

2526 Regency Road, Suite 180; SUITE 104

Lexington, KY 40503

Customer Relationship Manager

David Lester

Thursday, January 5, 2023

Please find enclosed the analytical results for the samples you submitted to Microbac Laboratories. Review and compilation of your report was completed by Microbac Laboratories, Inc., Louisville. If you have any questions, comments, or require further assistance regarding this report, please contact your service representative listed above.

I certify that all test results meet all of the requirements of the accrediting authority listed within this report. Analytical results are reported on a 'as received' basis unless specified otherwise. Analytical results for solids with units ending in (dry) are reported on a dry weight basis. A statement of uncertainty for each analysis is available upon request. This laboratory report shall not be reproduced, except in full, without the written approval of Microbac Laboratories. The reported results are related only to the samples analyzed as received.

Microbac Laboratories, Inc.

3323 Gilmore Industrial Blvd | Louisville, KY 40213 | 502.962.6400 p | www.microbac.com



Microbac Laboratories, Inc., Louisville

CERTIFICATE OF ANALYSIS

L2L1039

Client Sample ID: 1-10144-1	Collected By: CUSTOMER
Sample Matrix: Solid	Collection Date: 12/19/2022 12:00
Lab Sample ID: L2L1039-03	

Analyses Performed by: MCCALL AND SPERO ENVIRONMENTAL

General Parameters	Result	Limit(s)	MDL	RL	Units	Note	Prepared	Analyzed	Analyst
Method: EPA/600/M4-82-020									
Asbestos, Chrysotile	<1		1	1	%		12/19/22 1200	01/03/23 0000	MCS
Asbestos, Amosite	<1		1	1	%		12/19/22 1200	01/03/23 0000	MCS
Asbestos, Crocidolite	<1		1	1	%		12/19/22 1200	01/03/23 0000	MCS
Asbestos, Other	<1		1	1	%		12/19/22 1200	01/03/23 0000	MCS
Cellulose	5		1	1	%		12/19/22 1200	01/03/23 0000	MCS
Fibrous Glass	<1		1	1	%		12/19/22 1200	01/03/23 0000	MCS
Mineral Wool	<1		1	1	%		12/19/22 1200	01/03/23 0000	MCS
Other Non-Asbestos Fibers	95		1	1	%		12/19/22 1200	01/03/23 0000	MCS
Other Matrix Materials	<1		1	1	%		12/19/22 1200	01/03/23 0000	MCS

Client Sample ID: 1-10116-1	Collected By: CUSTOMER
Sample Matrix: Solid	Collection Date: 12/19/2022 13:00
Lab Sample ID: L2L1039-04	

Analyses Performed by: MCCALL AND SPERO ENVIRONMENTAL

General Parameters	Result	Limit(s)	MDL	RL	Units	Note	Prepared	Analyzed	Analyst
Method: EPA/600/M4-82-020									
Asbestos, Chrysotile	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Asbestos, Amosite	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Asbestos, Crocidolite	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Asbestos, Other	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Cellulose	5		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Fibrous Glass	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Mineral Wool	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Other Non-Asbestos Fibers	95		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Other Matrix Materials	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS



Microbac Laboratories, Inc., Louisville

CERTIFICATE OF ANALYSIS

L2L1039

Client Sample ID: 1-10116-2	Collected By: CUSTOMER
Sample Matrix: Solid	Collection Date: 12/19/2022 13:00
Lab Sample ID: L2L1039-05	

Analyses Performed by: MCCALL AND SPERO ENVIRONMENTAL

General Parameters	Result	Limit(s)	MDL	RL	Units	Note	Prepared	Analyzed	Analyst
Method: EPA/600/M4-82-020									
Asbestos, Chrysotile	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Asbestos, Amosite	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Asbestos, Crocidolite	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Asbestos, Other	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Cellulose	5		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Fibrous Glass	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Mineral Wool	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Other Non-Asbestos Fibers	95		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Other Matrix Materials	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS

Client Sample ID: 1-10116-3	Collected By: CUSTOMER
Sample Matrix: Solid	Collection Date: 12/19/2022 13:00
Lab Sample ID: L2L1039-06	

Analyses Performed by: MCCALL AND SPERO ENVIRONMENTAL

General Parameters	Result	Limit(s)	MDL	RL	Units	Note	Prepared	Analyzed	Analyst
Method: EPA/600/M4-82-020									
Asbestos, Chrysotile	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Asbestos, Amosite	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Asbestos, Crocidolite	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Asbestos, Other	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Cellulose	5		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Fibrous Glass	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Mineral Wool	<1		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Other Non-Asbestos Fibers	90		1	1	%		12/19/22 1300	01/03/23 0000	MCS
Other Matrix Materials	5		1	1	%		12/19/22 1300	01/03/23 0000	MCS

**NOTIFICATION OF ASBESTOS
 ABATEMENT/DEMOLITION/RENOVATION**
 (Instructions for completing form on back)

File this form with Regional Office where project will be performed

Kentucky Division for Air Quality
 300 Sower Boulevard, 2nd Floor
 Frankfort, KY 40601

PAGE 1 OF _____
 INITIAL SUBMITTAL DATE _____
 REVISION DATE _____
 NOTIFICATION # _____

OFFICE USE ONLY
 ID # _____
 LOG # _____

Contractor _____
 Address _____
 City _____ State _____ Zip _____
 Phone _____ Contact Person _____
Owner _____
 Address _____
 City _____ State _____ Zip _____
 Phone _____ Contact Person _____
Project Location _____
 Address _____
 City _____ State _____ Zip _____
 Facility Age (yrs.) _____ Size of Facility or Affected Part (sq. ft.) _____
 #Floors Affected _____ Present and Prior Use of Facility _____
TYPE OF PROJECT (CHECK ONLY ONE):
 Renovation Demolition Ordered Demolition Emergency Long-term
PROJECT DATES:
 Start Removal _____ End Removal _____
 Start Renovation/Demolition _____ End Renovation/Demolition _____

Description of planned renovation/demolition, including abatement methods & demo/reno methods. _____
Description of affected facility components _____
Asbestos detection technique _____
Amount of Cat. I & II nonfriable ACM involved but will not be removed: _____
 Describe **physical characteristics** that make it nonfriable and **methods** to keep it nonfriable (optional): _____
 Describe **contingency plan** should nonfriable ACM become friable or additional ACM be uncovered during renovation/ demolition: _____
Transporter _____
 Address _____
 City _____ State _____ Zip _____
 Phone _____

Amount of ACM to be Removed:

	Regulated ACM (FACM)	Category II nonfriable ACM (optional)	Category I nonfriable ACM (optional)
Linear Feet			
Square Feet			
Cubic Feet			

Disposal Site _____
 Address _____
 City _____ State _____ Zip _____
 I hereby certify that at least one person trained as required by 40 CFR 61.145(c)(8) will supervise the abatement work described herein. (optional for strictly non-friable work)
Submitted by: _____
Company Name: _____

INSTRUCTIONS FOR COMPLETING FORM DEP7036: NOTIFICATION OF ASBESTOS ABATEMENT/DEMOLITION/RENOVATION

Filing Deadline: This form must be completed and filed with the Kentucky Division for Air Quality at least ten (10) working days before starting any asbestos removal, demolition, or other work which will disturb asbestos-containing material (ACM) in Kentucky facilities outside Jefferson County and in schools statewide, including Jefferson County. File with appropriate Regional Office.

Renotification: If developments occur that invalidate information on a notification (e.g., changes in dates, amounts, locations), file a revised form within the time frames specified in 401 KAR 58:025. Notifications may be numbered in the top-left corner (optional). First two digits are project year; remaining digits are project number (e.g., the first project in 1999 is 99-1).

Attachments: Attachments may be included to provide additional information, propose alternative procedures, declare nonfriable removal, identify secondary transporters, etc.

Line-by-Line Instructions:

Contractor/Owner: the contractor is the asbestos remover (or, for zero-asbestos demolitions, the demolition contractor). The owner is the entity having the work done.
Project Location: The location at the address given where the work is taking place (e.g., which building/floor/room?).

Present/Prior Use: Enter the present and prior use(s) of the facility.

Type of Project: Each choice shown in this category has a specific description under 401 KAR 58:025:

Emergency renovations result from a sudden, unexpected event. If the project is an emergency renovation, attach a detailed description of the sudden, unexpected event that necessitated removal. Include the exact date and hour the event occurred and explain how the event caused an unsafe condition, or would cause equipment damage or unreasonable financial burden.

Planned renovations are renovations that do not qualify as emergency renovations.

A long-term notification is a type of planned renovation which involves a number of nonscheduled small-scale removals whose annual total exceeds the NESHAP threshold amounts and can be estimated based on past years' experience. File yearly estimate at least 10 working days before the beginning of the calendar year for which a long-term notification is being given.

Demolitions involve the wrecking or taking out of a load-supporting structural member, such as a load-bearing beam or wall. Tearing down a structure, dismantling it piecemeal, and moving it from one place to another are all considered demolitions.

Ordered demolitions must result from a demolition order issued by a government agency because the building is structurally unsound and in danger of imminent collapse. For ordered demolitions, attach to the notification a signed, dated copy of order that includes demolition deadlines and name/title/authority of the government representative issuing the order.

Project Dates: Schedules must be precise and accurate. The "start removal" date is the date the removers arrive on-site and begin physically preparing the work area for removal. "End removal" is the date the removers dismantle the work area after cleaning and clearing it. If circumstances arise that invalidate previously submitted start dates, a revised notification must be submitted showing the updated, correct start date. If the start date has been moved up, submit written renotification at least ten working days before the new start date. If the start date has been moved back, telephone the Division as soon as possible before the original date and submit written renotification no later than the original start date.

Schedules for renovation and demolition (next line after removal schedule) are handled similarly, except that renotification is required only for schedule changes involving demolitions, not renovations.

Amount of ACM: In this table, enter the amount and type (FACM, Category I, and/or Category II) of asbestos that will be removed. Although the regulation does not require you to identify the amount of nonfriable ACM that will be removed, the table provides space for nonfriable ACM to accommodate those notifiers who choose to document these removals.

Description of project: Describe the demolition or renovation work to be performed and method(s) to be used, including work practices and engineering controls to be used.

Asbestos Detection Technique: Give a general description of the asbestos survey, for example, "AHERA-style survey by accredited inspector; samples analyzed by PLM."

Amount of nonfriable ...: If all nonfriable ACM will be properly removed, enter "NA."

Contingency Plans: If Category II nonfriable ACM becomes crumbled, pulverized, or reduced to powder, or if additional RACM is discovered, describe procedures to be followed. For example, "Move demolition activity away from ACM immediately; remove the ACM using regulation-required procedures." Even "Stop work, call Division for Air Quality" is OK.

PROPOSAL BID ITEMS

Report Date 7/11/23

Section: 0001 - BRIDGE - 038B00023N

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	500.00	TON		\$	
0020	00100		ASPHALT SEAL AGGREGATE	6.00	TON		\$	
0030	00103		ASPHALT SEAL COAT	1.00	TON		\$	
0040	00212		CL2 ASPH BASE 1.00D PG64-22	665.00	TON		\$	
0050	00301		CL2 ASPH SURF 0.38D PG64-22	73.00	TON		\$	
0060	01987		DELINEATOR FOR GUARDRAIL BI DIRECTIONAL WHITE	6.00	EACH		\$	
0070	02200		ROADWAY EXCAVATION REVISED 7-11-2023	367.33	CUYD		\$	
0080	02351		GUARDRAIL-STEEL W BEAM-S FACE	200.00	LF		\$	
0090	02367		GUARDRAIL END TREATMENT TYPE 1	4.00	EACH		\$	
0100	02545		CLEARING AND GRUBBING APPROX. LESS THAN 1 ACRE	1.00	LS		\$	
0110	02585		EDGE KEY	40.00	LF		\$	
0120	02650		MAINTAIN & CONTROL TRAFFIC	1.00	LS		\$	
0130	02671		PORTABLE CHANGEABLE MESSAGE SIGN	2.00	EACH		\$	
0140	02726		STAKING	1.00	LS		\$	
0150	02731		REMOVE STRUCTURE	1.00	LS		\$	
0160	03299		ARMORED EDGE FOR CONCRETE	59.00	LF		\$	
0170	06514		PAVE STRIPING-PERM PAINT-4 IN	1,153.00	LF		\$	
0180	08003		FOUNDATION PREPARATION	1.00	LS		\$	
0190	08019		CYCLOPEAN STONE RIP RAP	580.00	TON		\$	
0200	08033		TEST PILES	190.00	LF		\$	
0210	08051		PILES-STEEL HP14X89	1,106.00	LF		\$	
0220	08100		CONCRETE-CLASS A	49.30	CUYD		\$	
0230	08104		CONCRETE-CLASS AA	42.30	CUYD		\$	
0240	08151		STEEL REINFORCEMENT-EPOXY COATED	9,956.00	LB		\$	
0250	08666		PRECAST PC BOX BEAM CB42-48	644.00	LF		\$	
0260	20191ED		OBJECT MARKER TY 3	4.00	EACH		\$	
0270	21415ND		EROSION CONTROL	1.00	LS		\$	
0280	22883EN		CONCRETE WEDGE CURB	323.00	LF		\$	
0290	23378EC		CONCRETE SEALING	5,271.00	SQFT		\$	
0300	24970EC		ASPHALT MATERIAL FOR TACK NON- TRACKING	.50	TON		\$	
0310	25028ED		RAIL SYSTEM SINGLE SLOPE - 40 IN	184.00	LF		\$	
0320	25078ED		THRIE BEAM GUARDRAIL TRANSITION TL-3	4.00	EACH		\$	

Section: 0002 - DEMOBILIZATION &/OR MOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0330	02569		DEMOBILIZATION	1.00	LS		\$	