



**COMMONWEALTH OF KENTUCKY
TRANSPORTATION CABINET**
Frankfort, Kentucky 40622
www.transportation.ky.gov/

Matthew G. Bevin
Governor

Greg Thomas
Secretary

August 22, 2016

CALL NO. 107
CONTRACT ID NO. 162206
ADDENDUM # 1

Subject: Laurel County, HSIP 9010 (251)
Letting August 26, 2016

- (1) Added - Notes - Pages 1-3 of 3
- (2) Revised - Bid Items - Page 102 of 102

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in cursive script that reads "Rachel Mills".

Rachel Mills, P.E.
Director
Division of Construction Procurement

RM:ks
Enclosures



An Equal Opportunity Employer M/F/D


SPECIAL NOTE FOR SHOULDER AND DITCH PREPARATION

Grade, shape, and compact shoulder as shown on the typical section and as directed by the Engineer to provide proper template and foundation for the shoulder resurfacing. The Department will not measure grading, shaping, and compacting shoulders for separate payment, but shall be incidental to the asphalt base and/or surface placed on the shoulder. Excavation or embankment needed to construct the new ditch will be incidental to the pay item for ditching. Any items including but not limited to mailboxes and landscaping shall be removed and relocated if applicable.

1-3245 Shoulder Preparation Contractor
01/02/2012

KY 3094 HSIP Shoulder Widening

Pipe Section

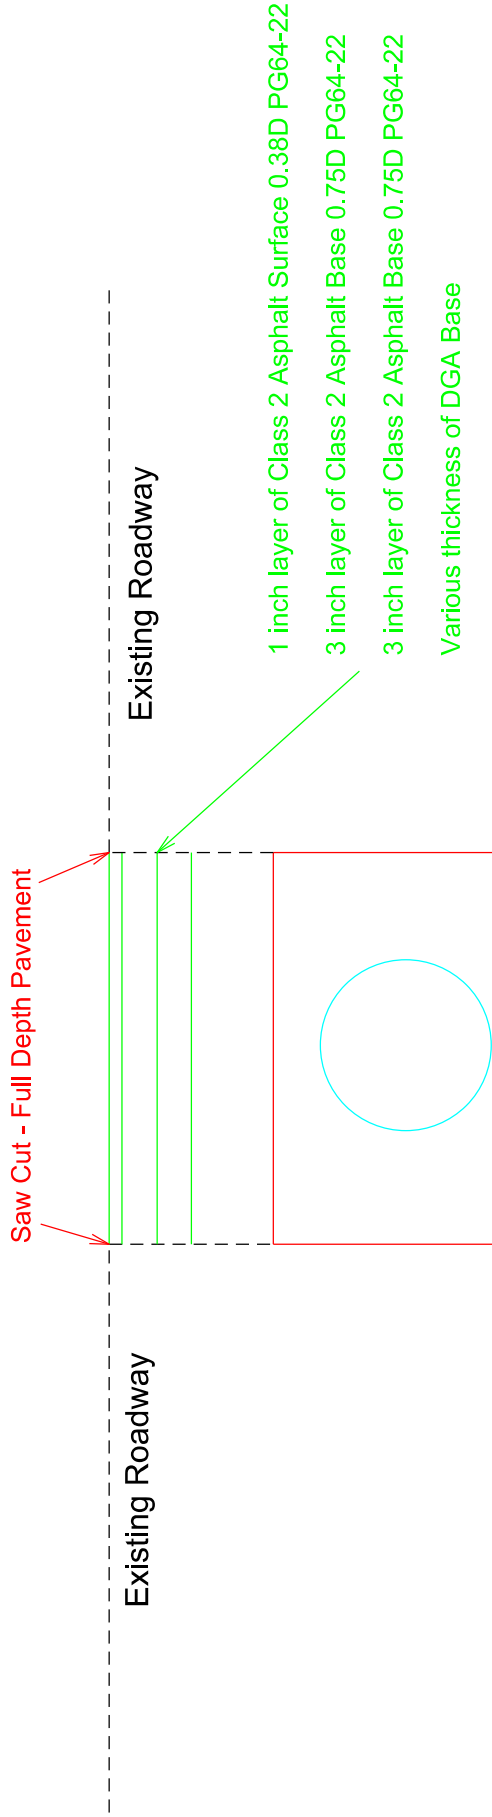

Geotextile Fabric Type IV shall be placed around the pipe bedding
DGA will be placed from the Geotextile Fabric to the top of the trench
and remain in place for a 2 week period to allow settlement. Once this time
frame has passed, the DGA will be removed below the surface of the road
a depth of 7 inches and the pavement structure shown will be placed.

**Saw Cut - Full Depth Pavement will be included in the price for
Pipe Removal and will done to ensure a Clean Pavement Edge**

**SPECIAL NOTE FOR REMOVING AND REPLACING DROP BOX INLET
FD52 063 3094 000.002**

Remove and Replace Drop Box Inlet. Remove existing drop box inlet and construct modified Drop Box Inlet Type 14 for 18 inch pipe at approximate milepoint 0.685 to generally conform to Standard Drawing RDB-020-05. Provide security devices according to Standard Drawing RDX-160-06. Coordinate the removal, replacement, and construction of the drainage structures with the Engineer. Vary dimensions as approved by the Engineer to match existing and/or proposed flow lines as applicable. Obtain Engineer's approval of flow line grades and inlet elevations before placing concrete. Provide positive drainage during and upon completion of construction. Deliver existing frame and grate to the Department's Laurel County Maintenance Headquarters. Dispose of the remainder of the existing structure, waste, and debris off the right-of-way at sites obtained by the Contractor at no additional cost to the Department.

Method of Measurement. The Department will measure removing and replacing the drop box inlet as DROP BOX INLET TYPE 14 as individual units, each.

Basis of Payment. Accept payment at the Contract unit price each as full compensation for all labor, equipment, materials, and incidentals for removing existing drop box inlet, constructing the new DROP BOX INLET TYPE 14, delivering the existing frame and grate to the Department's Laurel County Maintenance Headquarters, and disposing of remainder of the existing structure waste and debris.

PROPOSAL BID ITEMS

Report Date 8/22/16

Section: 0001 - PAVING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	1,350.00	TON		\$	
0020	00221		CL2 ASPH BASE 0.75D PG64-22	1,450.00	TON		\$	
0030	00301		CL2 ASPH SURF 0.38D PG64-22	260.00	TON		\$	
0040	02562		TEMPORARY SIGNS	320.00	SQFT		\$	
0050	02599		FABRIC-GEOTEXTILE TYPE IV	3,100.00	SQYD		\$	
0060	02650		MAINTAIN & CONTROL TRAFFIC	1.00	LS		\$	
0070	06427		TRENCHING	12,500.00	LF		\$	
0080	06514		PAVE STRIPING-PERM PAINT-4 IN	24,900.00	LF		\$	
0090	23595EC		RUMBLE STRIPE-SAW CUT	12,450.00	LF		\$	

Section: 0002 - DRAINAGE

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0100	00440		ENTRANCE PIPE-15 IN	1,050.00	LF		\$	
0110	00462		CULVERT PIPE-18 IN	68.00	LF		\$	
0120	00464		CULVERT PIPE-24 IN	240.00	LF		\$	
0130	00468		CULVERT PIPE-36 IN	34.00	LF		\$	
0140	01310		REMOVE PIPE (REVISED: 8-22-16)	1,380.00	LF		\$	
0150	01577		DROP BOX INLET TYPE 14	1.00	EACH		\$	
0160	02237		DITCHING	12,500.00	LF		\$	

Section: 0003 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0170	02569		DEMOBILIZATION	1.00	LS		\$	