



COMMONWEALTH OF KENTUCKY
TRANSPORTATION CABINET
www.transportation.ky.gov/

Andy Beshear
GOVERNOR

Jim Gray
SECRETARY

April 20, 2022

CALL NO. 202
CONTRACT ID NO. 224423
ADDENDUM # 1

Subject: Christian County, 024GR22T011-HSIP & FD05
Letting April 28, 2022

- (1) Revised - Typical Sections - Page 107 of 270
- (2) Revised - Plan Sheet 5 - Page 130 of 270

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,


Rachel Mills,

A handwritten signature in cursive script that reads "Rachel Mills".

Rachel Mills, P.E.
Director
Division of Construction Procurement

RM:mr
Enclosures


TYPICAL SECTIONS HSIP

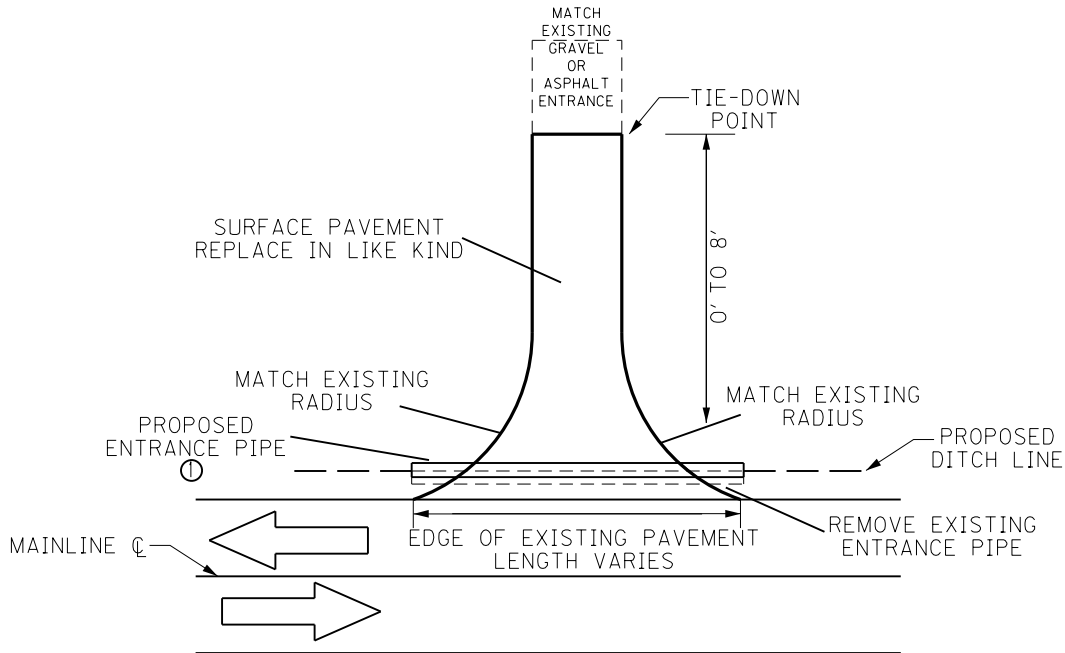


ENTRANCE DETAIL

NOTES:

- ① PLACE ENTRANCE PIPE AFTER DITCHING AND SHOULDERING OPERATIONS HAVE BEEN COMPLETED TO LINE UP WITH NEW DITCH LINE.

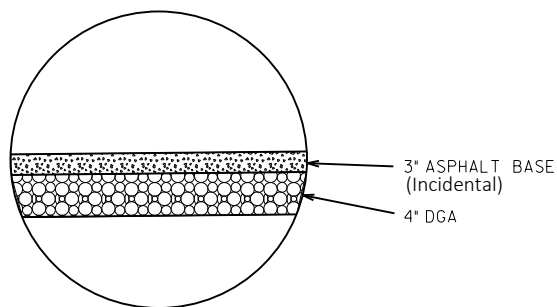

ASPHALT ENTRANCE
NOT TO SCALE

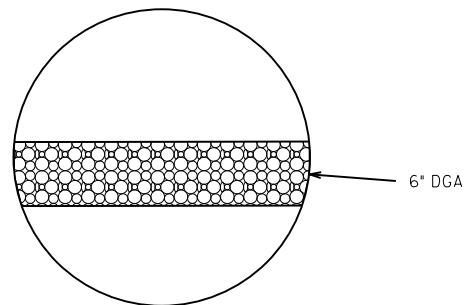

GRAVEL ENTRANCE
NOT TO SCALE

SCALE: 1"= NS

**TYPICAL SECTION
ENTRANCES**

MATCHLINE STA. 1232+00

NOTE:
LOCATION OF EXISTING UNDERGROUND UTILITIES IS NOT KNOWN.

CONTRACTOR IS RESPONSIBLE FOR VERIFYING UTILITY LOCATIONS WHILE PERFORMING WORK ON THIS PROJECT.

ALL WORK ON THIS PROJECT IS TO BE DONE AS DIRECTED BY KYTC CONSTRUCTION ENGINEER.



DITCHING AND SHOULDERING	
OFFSET	STA. TO STA.
LT	1213+00 - 1214+27
LT	1220+35 - 1221+35
RT	1213+00 - 1217+32
RT	1220+90 - 1224+60
RT	1224+60 - 1227+57

DGA WEDGE	
OFFSET	STA. TO STA.
LT	1213+00 - 1216+15
LT	1217+01 - 1232+00
RT	1217+32 - 1220+90
RT	1227+65 - 1232+00

STA. 1228+45.89
REPLACE 18" RCP
LEFT:
SLOPED & MITERED CONC. HEADWALL
RIGHT:
SAFETY BOX INLET - 18 IN SDB-1
CHANNEL LINING CLASS II - 25 TONS

STA. 1223+87.65 - 12' x 5' RCBC
LEFT - ADD CLEANOUT
RIGHT - EXTEND 7 FT., INSTALL
SLOPED & MITERED CONC. HEADWALL
SEE STRUCTURE PLANS FOR DETAILS
ADD 100 TON CLASS II CHANNEL
LINING, CLEANOUT ISLAND.

STA. 1219+42.16 - REPLACE 24" RCP
LEFT:
SLOPED & MITERED CONC. HEADWALL
CHANNEL LINING CLASS II - 25 TON
RIGHT:
SLOPED & MITERED CONC. HEADWALL
CHANNEL LINING CLASS II - 25 TON

STA. 1217+92.16 - REPLACE 24" RCP
LEFT:
SLOPED & MITERED CONC. HEADWALL
CHANNEL LINING CLASS II - 25 TON
RIGHT:
SLOPED & MITERED CONC. HEADWALL
CHANNEL LINING CLASS II - 25 TON

BRIDGE 02400016N (SB)
REPLACE GUARDRAIL

BRIDGE 024B00016N (NB)
REPLACE GUARDRAIL

LT. STA. 1213+50 to STA. 1214+47
REMOVE EXISTING GUARDRAIL

RT. STA. 1213+75 to STA. 1214+72
REMOVE EXISTING GUARDRAIL

REMOVE WOODEN POSTS (10)
LT STA. 1212+13 to STA. 1213+50

SCALE: 1"=200'

MATCHLINE STA. 1213+00

KY 107 (Greenville Rd.)
PLAN SHEET 5
STA. 1213+00 to STA. 1232+00