



TRANSPORTATION CABINET

Frankfort, Kentucky 40622
www.transportation.ky.gov/

Steven L. Beshear
Governor

Michael W. Hancock, P.E.
Secretary

June 6, 2013

CALL NO. 302
CONTRACT ID NO. 131038
ADDENDUM # 1

Subject: Barren County, JL04 005 0090 013-019
Letting June 14, 2013

(1) Revised - Plan Sheet - R2o

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

Plan revisions are available at <http://www.lynnimaging.com/kytransportation/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in blue ink that reads "Ryan Griffith".

Ryan Griffith
Acting Director
Division of Construction Procurement

RG:ks
Enclosures



An Equal Opportunity Employer M/F/D

COUNTY OF	ITEM NO.	SHEET NO.
BARREN	3-108.30	R2o

General Provisions, Special Notes, and Special Provisions

DIVISION 100 -- GENERAL PROVISIONS

160 N.G.S. (U.S.G.S.) BENCH MARKS

DO NOT DISTURB N.G.S. (U.S.G.S.) BENCH MARKS IN ANY MANNER UNLESS DIRECTED BY THE ENGINEER.

165 BEFORE YOU DIG

THE CONTRACTOR IS INSTRUCTED TO CALL 1-800-752-6007 TO REACH KY 811, THE ONE-CALL SYSTEM FOR INFORMATION ON THE LOCATION OF EXISTING UNDERGROUND UTILITIES. THE CALL IS TO BE PLACED A MINIMUM OF TWO (2) AND NO MORE THAN TEN (10) BUSINESS DAYS PRIOR TO EXCAVATION. THE CONTRACTOR SHOULD BE AWARE THAT OWNERS OF UNDERGROUND FACILITIES ARE NOT REQUIRED TO BE MEMBERS OF THE KY 811 ONE-CALL BEFORE-U-DIG (BUD) SERVICE. THE CONTRACTOR MUST COORDINATE EXCAVATION WITH THE UTILITY OWNERS INCLUDING THOSE WHOM DO NOT SUBSCRIBE TO KY 811. IT MAY BE NECESSARY FOR THE CONTRACTOR TO CONTACT THE COUNTY COURT CLERK TO DETERMINE WHAT UTILITY COMPANIES HAVE FACILITIES IN THE AREA.

190 DEPARTMENT OF THE ARMY PERMIT AND WATER QUALITY CERTIFICATION APPROVALS

A DEPARTMENT OF THE ARMY (DA) PERMIT, WHICH MAY REQUIRE APPROVAL OF A STATE WATER QUALITY CERTIFICATION FROM THE KENTUCKY DIVISION OF WATER, REGULATES THIS PROJECT AT ONE OR MORE LOCATIONS. PERFORM ALL APPLICABLE WORK IN COMPLIANCE WITH THE CONDITIONS STATED IN THE DA PERMIT AND THE APPROVED WATER QUALITY CERTIFICATION. POST A COPY OF THE DA PERMIT AND THE WATER QUALITY CERTIFICATION IN A CONSPICUOUS PLACE AT THE PROJECT SITE. IF A DA PERMIT OR WATER QUALITY CERTIFICATION APPROVAL IS PENDING, DO NOT WORK IN OR DISTURB THE DESIGNATED AREA(S) UNTIL OBTAINING THE APPROPRIATE APPROVAL(S). REFER TO NOTICE(S) CONTAINED IN THE CONTRACT BID PROPOSAL FOR DESIGNATED AREA(S) WHERE WORK IS PROHIBITED BY THE ABSENCE OF APPROVAL.

DIVISION 400 -- ASPHALT PAVEMENTS

429 WINTER CLOSEDOWN

ANY ASPHALT CONCRETE BASE AND/OR SURFACE COURSE USED AS A RIDING SURFACE EXPOSED TO TRAFFIC DURING WINTER CLOSEDOWN PERIODS SHALL CONTAIN NATURAL, CONGLOMERATE, CRUSHED SLAG, CRUSHED GRANITE OR CRUSHED SANDSTONE SAND IN THE PROPORTION OF NO LESS THAN 25% OF THE TOTAL COMBINED COARSE AND FINE AGGREGATE.

444 ASPHALT PAVEMENT RIDE QUALITY

PAVEMENT RIDEABILITY REQUIREMENTS, IN ACCORDANCE WITH SECTION 410 OF THE STANDARD SPECIFICATIONS, SHALL APPLY ON THIS PROJECT. CATEGORY A SHALL APPLY.

447 COMPACTION OF ASPHALT MIXTURES

WILL ACCEPT THE COMPACTION OF ASPHALT MIXTURES FURNISHED FOR DRIVING LANES AND RAMPS AT ONE INCH (25 MM) OR GREATER ON THIS PROJECT BY OPTION A ACCORDING TO SUBSECTIONS 402 AND 403 OF THE CURRENT STANDARD SPECIFICATIONS. USE JOINT CORES AS DESCRIBED IN SUBSECTION 402.03.02 FOR SURFACE MIXTURES ONLY. WILL ACCEPT THE COMPACTION OF ALL OTHER ASPHALT MIXTURES BY OPTION B.

455 EDGE KEY

THIS WORK INCLUDES CUTTING OUT THE EXISTING ASPHALT SURFACE TO A MINIMUM DEPTH AND WIDTH AS DETAILED ELSEWHERE IN THE PLANS SO THAT THE NEW SURFACE MAY HEEL INTO THE EXISTING SURFACE. THE CONTRACT UNIT PRICE BID LINEAR FOOT (PER METER) FOR "EDGE KEY" INCLUDES ALL NECESSARY MATERIALS, LABOR AND EQUIPMENT NECESSARY TO PERFORM THE WORK AND DISPOSE OF THE REMOVED ASPHALT MATERIAL.

DIVISION 600 -- STRUCTURES AND CONCRETE

650 STANDARD DRAWINGS

STANDARD DRAWINGS ARE NOT ATTACHED TO THESE PLANS. A STANDARD DRAWING BOOK AND THE HEADWALL SUPPLEMENTAL BOOK MAY BE OBTAINED FROM THE POLICY SUPPORT BRANCH OF THE DEPARTMENT OF ADMINISTRATIVE SERVICES IN FRANKFORT, KY. AT (502) 564-3670

DIVISION 700 -- DRAINAGE, TRAFFIC, AND ROADSIDE CONSTRUCTION

730 EXISTING LANDSCAPE MATERIAL

DO NOT DISTURB LANDSCAPE PLANTS UNLESS ABSOLUTELY NECESSARY.

DO NOT DISTURB ANY PLANTS WITHOUT PRIOR APPROVAL OF THE PROJECT ENGINEER.

THE PROJECT ENGINEER SHALL NOTIFY THE DISTRICT AGRONOMIST FOR POSSIBLE DEPARTMENT SALVAGE OF ANY PLANTS NEEDING REMOVAL.

SPECIAL NOTES

SPECIAL NOTE 1I PORTABLE CHANGEABLE MESSAGE SIGN

SPECIAL NOTE 1ID ROCK BLASTING

SPECIAL NOTE 1IF TURF REINFORCEMENT MAT

SPECIAL NOTE 1IG ACCEPTANCE OF DENSITY OF LONGITUDINAL JOINTS IN ASPHALT SURFACE PAVEMENTS

ADDITIONAL SPECIAL NOTES:

- PROJECT SUPERINTENDENT
THE PRIME CONTRACTOR MUST HAVE A PROJECT SUPERINTENDENT ON THE PROJECT DURING ALL PHASES OF CONSTRUCTION (INCLUDING ALL SUBCONTRACTED WORK). THE SUPERINTENDENT SHALL BE PRESENT FROM THE BEGINNING OF THE PROJECT UNTIL THE PROJECT IS CALLED COMPLETE. IF THE SUPERINTENDENT IS CHANGED DURING THE PROJECT LIQUIDATED DAMAGES WILL BE ASSESSED. FOR EACH INSTANCE THAT THE PROJECT SUPERINTENDENT IS NOT ON THE PROJECT DURING CONSTRUCTION, THE DEPARTMENT WILL ASSESS LIQUIDATED DAMAGES AT THE DAILY CHARGE RATE SET OUT IN SECTION 108.09 OF THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, CURRENT EDITION.
- POTHOLE PATCHING
CONTRARY TO STANDARD SPECIFICATIONS 105.11, THE CONTRACTOR SHALL PERFORM POTHOLE PATCHING ON THIS PROJECT WHEN DIRECTED BY THE ENGINEER. PAY FOR THIS WORK SHALL BE CONSIDERED INCIDENTAL TO OTHER ITEMS OF WORK. POTHOLE PATCHING SHALL BE COMPLETED WITHIN TWO HOURS OF NOTIFICATION FROM THE ENGINEER. THE CONTRACTOR WILL BE PENALIZED THREE THOUSAND DOLLARS (\$3,000.00) FOR EACH INCIDENCE OF NON-COMPLIANCE WHEN POTHOLE PATCHING IS NOT COMPLETED WITHIN TWO HOURS OF NOTIFICATION.
- ALL LONGITUDINAL PIPE DRAINAGE SYSTEMS FOR THE PAVEMENT DRAINAGE BLANKET SHALL BE OUTLETED TO A HEADWALL, MEDIAN BOX INLET, DITCH BOX, OR CURB BOX INLET. OUTLETS SHALL BE IN A FULL SECTION WHENEVER POSSIBLE. OUTLET SPACING SHALL NOT EXCEED 500 FEET EXCEPT FOR GRADES 1% OR LESS, THEN THE SPACING OF OUTLETS SHALL NOT EXCEED 250 FEET. ALL SAGS SHALL HAVE AN OUTLET. SEE PERFORATED PIPE UNDERDRAIN SUMMARY FOR OUTLET LOCATIONS.

FILE NAME: G:\PWORK\MWILEY\DO138837\RO0200SU.DGN

USER: Mwiley
DATE PLOTTED: June 6, 2013

E-SHEET NAME:

MicroStation v8.11.7.180

GENERAL NOTES

COUNTY OF	ITEM NO.	SHEET NO.
BARREN	3-108.30	R2o

General Provisions, Special Notes, and Special Provisions

DIVISION 100 -- GENERAL PROVISIONS

160 N.G.S. (U.S.G.S.) BENCH MARKS

DO NOT DISTURB N.G.S. (U.S.G.S.) BENCH MARKS IN ANY MANNER UNLESS DIRECTED BY THE ENGINEER.

165 BEFORE YOU DIG

THE CONTRACTOR IS INSTRUCTED TO CALL 1-800-752-6007 TO REACH KY 811, THE ONE-CALL SYSTEM FOR INFORMATION ON THE LOCATION OF EXISTING UNDERGROUND UTILITIES. THE CALL IS TO BE PLACED A MINIMUM OF TWO (2) AND NO MORE THAN TEN (10) BUSINESS DAYS PRIOR TO EXCAVATION. THE CONTRACTOR SHOULD BE AWARE THAT OWNERS OF UNDERGROUND FACILITIES ARE NOT REQUIRED TO BE MEMBERS OF THE KY 811 ONE-CALL BEFORE-U-DIG (BUD) SERVICE. THE CONTRACTOR MUST COORDINATE EXCAVATION WITH THE UTILITY OWNERS INCLUDING THOSE WHOM DO NOT SUBSCRIBE TO KY 811. IT MAY BE NECESSARY FOR THE CONTRACTOR TO CONTACT THE COUNTY COURT CLERK TO DETERMINE WHAT UTILITY COMPANIES HAVE FACILITIES IN THE AREA.

190 DEPARTMENT OF THE ARMY PERMIT AND WATER QUALITY CERTIFICATION APPROVALS

A DEPARTMENT OF THE ARMY (DA) PERMIT, WHICH MAY REQUIRE APPROVAL OF A STATE WATER QUALITY CERTIFICATION FROM THE KENTUCKY DIVISION OF WATER, REGULATES THIS PROJECT AT ONE OR MORE LOCATIONS. PERFORM ALL APPLICABLE WORK IN COMPLIANCE WITH THE CONDITIONS STATED IN THE DA PERMIT AND THE APPROVED WATER QUALITY CERTIFICATION. POST A COPY OF THE DA PERMIT AND THE WATER QUALITY CERTIFICATION IN A CONSPICUOUS PLACE AT THE PROJECT SITE. IF A DA PERMIT OR WATER QUALITY CERTIFICATION APPROVAL IS PENDING, DO NOT WORK IN OR DISTURB THE DESIGNATED AREA(S) UNTIL OBTAINING THE APPROPRIATE APPROVAL(S). REFER TO NOTICE(S) CONTAINED IN THE CONTRACT BID PROPOSAL FOR DESIGNATED AREA(S) WHERE WORK IS PROHIBITED BY THE ABSENCE OF APPROVAL.

DIVISION 400 -- ASPHALT PAVEMENTS

429 WINTER CLOSEDOWN

ANY ASPHALT CONCRETE BASE AND/OR SURFACE COURSE USED AS A RIDING SURFACE EXPOSED TO TRAFFIC DURING WINTER CLOSEDOWN PERIODS SHALL CONTAIN NATURAL, CONGLOMERATE, CRUSHED SLAG, CRUSHED GRANITE OR CRUSHED SANDSTONE SAND IN THE PROPORTION OF NO LESS THAN 25% OF THE TOTAL COMBINED COARSE AND FINE AGGREGATE.

444 ASPHALT PAVEMENT RIDE QUALITY

PAVEMENT RIDEABILITY REQUIREMENTS, IN ACCORDANCE WITH SECTION 410 OF THE STANDARD SPECIFICATIONS, SHALL APPLY ON THIS PROJECT. CATEGORY A SHALL APPLY.

447 COMPACTION OF ASPHALT MIXTURES

WILL ACCEPT THE COMPACTION OF ASPHALT MIXTURES FURNISHED FOR DRIVING LANES AND RAMPS AT ONE INCH (25 MM) OR GREATER ON THIS PROJECT BY OPTION A ACCORDING TO SUBSECTIONS 402 AND 403 OF THE CURRENT STANDARD SPECIFICATIONS. USE JOINT CORES AS DESCRIBED IN SUBSECTION 402.03.02 FOR SURFACE MIXTURES ONLY. WILL ACCEPT THE COMPACTION OF ALL OTHER ASPHALT MIXTURES BY OPTION B.

455 EDGE KEY

THIS WORK INCLUDES CUTTING OUT THE EXISTING ASPHALT SURFACE TO A MINIMUM DEPTH AND WIDTH AS DETAILED ELSEWHERE IN THE PLANS SO THAT THE NEW SURFACE MAY HEEL INTO THE EXISTING SURFACE. THE CONTRACT UNIT PRICE BID LINEAR FOOT (PER METER) FOR "EDGE KEY" INCLUDES ALL NECESSARY MATERIALS, LABOR AND EQUIPMENT NECESSARY TO PERFORM THE WORK AND DISPOSE OF THE REMOVED ASPHALT MATERIAL.

DIVISION 600 -- STRUCTURES AND CONCRETE

650 STANDARD DRAWINGS

STANDARD DRAWINGS ARE NOT ATTACHED TO THESE PLANS. A STANDARD DRAWING BOOK AND THE HEADWALL SUPPLEMENTAL BOOK MAY BE OBTAINED FROM THE POLICY SUPPORT BRANCH OF THE DEPARTMENT OF ADMINISTRATIVE SERVICES IN FRANKFORT, KY. AT (502) 564-3670

DIVISION 700 -- DRAINAGE, TRAFFIC, AND ROADSIDE CONSTRUCTION

730 EXISTING LANDSCAPE MATERIAL

DO NOT DISTURB LANDSCAPE PLANTS UNLESS ABSOLUTELY NECESSARY.

DO NOT DISTURB ANY PLANTS WITHOUT PRIOR APPROVAL OF THE PROJECT ENGINEER.

THE PROJECT ENGINEER SHALL NOTIFY THE DISTRICT AGRONOMIST FOR POSSIBLE DEPARTMENT SALVAGE OF ANY PLANTS NEEDING REMOVAL.

SPECIAL NOTES

SPECIAL NOTE 1I PORTABLE CHANGEABLE MESSAGE SIGN

SPECIAL NOTE 1ID ROCK BLASTING

SPECIAL NOTE 1IF TURF REINFORCEMENT MAT


SPECIAL NOTE 1IG ACCEPTANCE OF DENSITY OF LONGITUDINAL JOINTS IN ASPHALT SURFACE PAVEMENTS

ADDITIONAL SPECIAL NOTES:

1. PROJECT SUPERINTENDENT
THE PRIME CONTRACTOR MUST HAVE A PROJECT SUPERINTENDENT ON THE PROJECT DURING ALL PHASES OF CONSTRUCTION (INCLUDING ALL SUBCONTRACTED WORK). THE SUPERINTENDENT SHALL BE PRESENT FROM THE BEGINNING OF THE PROJECT UNTIL THE PROJECT IS CALLED COMPLETE. IF THE SUPERINTENDENT IS CHANGED DURING THE PROJECT LIQUIDATED DAMAGES WILL BE ASSESSED. FOR EACH INSTANCE THAT THE PROJECT SUPERINTENDENT IS NOT ON THE PROJECT DURING CONSTRUCTION, THE DEPARTMENT WILL ASSESS LIQUIDATED DAMAGES AT THE DAILY CHARGE RATE SET OUT IN SECTION 108.09 OF THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, CURRENT EDITION.

2. POTHOLE PATCHING
CONTRARY TO STANDARD SPECIFICATIONS 105.11, THE CONTRACTOR SHALL PERFORM POTHOLE PATCHING ON THIS PROJECT WHEN DIRECTED BY THE ENGINEER. PAY FOR THIS WORK SHALL BE CONSIDERED INCIDENTAL TO OTHER ITEMS OF WORK. POTHOLE PATCHING SHALL BE COMPLETED WITHIN TWO HOURS OF NOTIFICATION FROM THE ENGINEER. THE CONTRACTOR WILL BE PENALIZED THREE THOUSAND DOLLARS (\$3,000.00) FOR EACH INCIDENCE OF NON-COMPLIANCE WHEN POTHOLE PATCHING IS NOT COMPLETED WITHIN TWO HOURS OF NOTIFICATION.

3. ALL LONGITUDINAL PIPE DRAINAGE SYSTEMS FOR THE PAVEMENT DRAINAGE BLANKET SHALL BE OUTLETED TO A HEADWALL, MEDIAN BOX INLET, DITCH BOX, OR CURB BOX INLET. OUTLETS SHALL BE IN A FULL SECTION WHENEVER POSSIBLE. OUTLET SPACING SHALL NOT EXCEED 500 FEET EXCEPT FOR GRADES 1% OR LESS, THEN THE SPACING OF OUTLETS SHALL NOT EXCEED 250 FEET. ALL SAGS SHALL HAVE AN OUTLET. SEE PERFORATED PIPE UNDERDRAIN SUMMARY FOR OUTLET LOCATIONS.

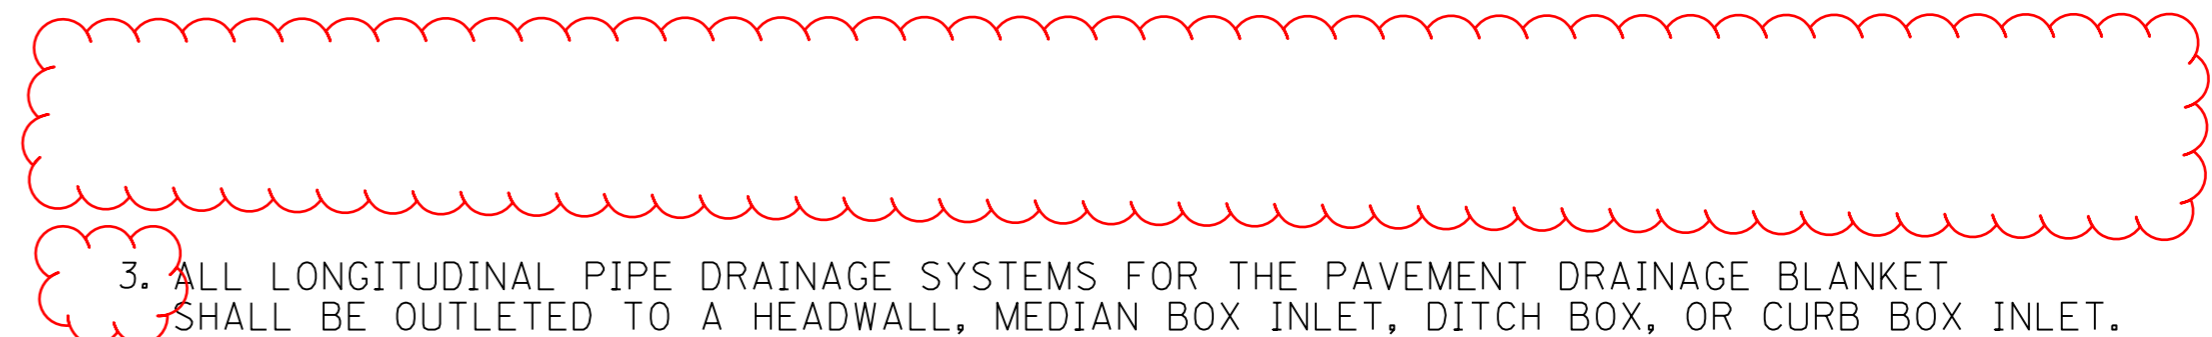

FILE NAME: G:\PWORK\MWILEY\00138837\000200SU.DGN

USER: Mwiley
DATE PLOTTED: June 6, 2013

E-SHEET NAME:

MicroStation vb.11.7.180

GENERAL NOTES