



TRANSPORTATION CABINET

Frankfort, Kentucky 40622
www.transportation.ky.gov/

Steven L. Beshear
Governor

Michael W. Hancock, P.E.
Secretary

September 20, 2011

CALL NO. 305
CONTRACT ID NO. 112981
ADDENDUM # 1

Subject: Powell County, FE02 099 0082 B00050N
Letting September 23, 2011

- (1) Revised - Special Note - Page 11 of 56
- (2) Revised - Bridge Drawing - Page 16 of 56
- (3) Revised - Bid Items - Page 56 of 56

Proposal revisions are available at <http://transportation.ky.gov/contract/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in blue ink that reads "Ryan Griffith".

Ryan Griffith
Director
Division of Construction Procurement

RG:ks
Enclosures



An Equal Opportunity Employer M/F/D

SPECIAL NOTE FOR APPROACH PAVEMENT

I. DESCRIPTION. Perform all work in accordance with the Kentucky Transportation Cabinet, Department of Highway's 2008 Standard Specifications for Road and Bridge Construction and applicable Supplemental Specifications, the Standard Drawings, this Note, and the attached detail drawings. Section references are to the Standard Specifications.

This work consists of the following: (1) Complete asphalt approach pavement; (2) Maintain and control traffic; and (3) Any other work specified as part of this contract.

All construction will be in accordance with Section 606 unless otherwise specified.

II. MATERIALS.

A. Bituminous Asphalt. Use CL4 ASPH SURF 0.38A PG76-22.

III. CONSTRUCTION.

A. Asphalt Approach Pavement. Mill the existing asphalt pavement on each end of the bridge for a distance of 10' as shown on the attached drawing. Remove the bituminous material uniformly by making an edge key, so as to provide a smooth transition to the finished bridge joint replacements. The grinding depth may vary depending of the condition of the existing approach and final elevation of bridge end. Dispose of all removed material away from the site.

IV. MEASUREMENT. See Section 606 and the following:


A. Asphalt Approach Pavement. The Department will measure the quantity in square yards, which shall include all labor, equipment, and material needed to complete this work.

V. PAYMENT. See Section 606 and the following:

A. Asphalt Approach Pavement. The Department will make payment for the completed and accepted quantity of this work under the pay item "BRIDGE OVERLAY APPROACH PAVEMENT".


EXPANSION DAM DETAIL

"Expansion Joint Replacement-2 1/2"

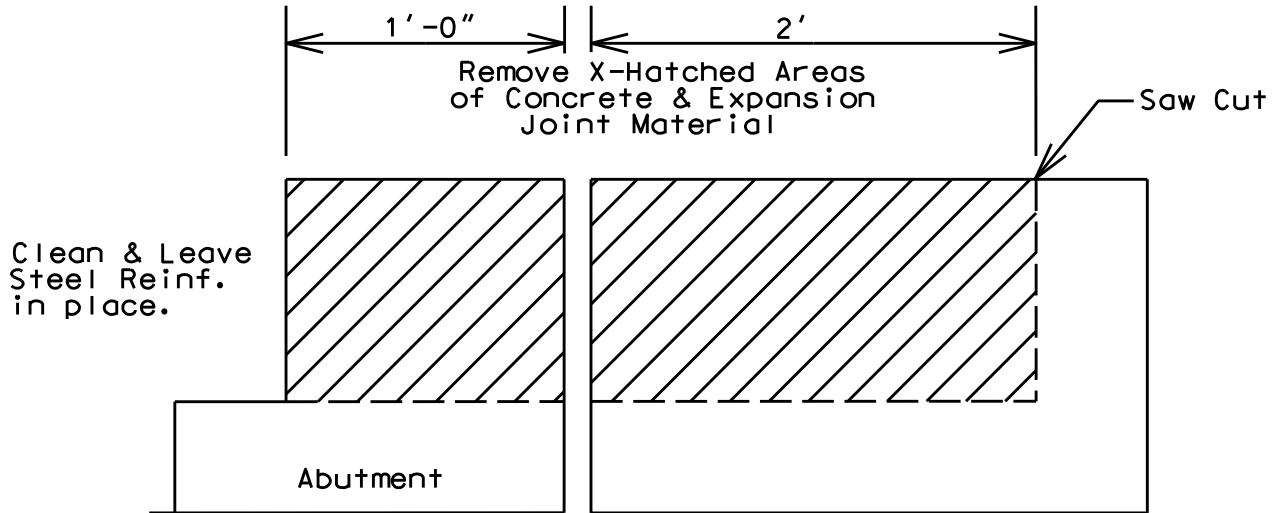

EXISTING SECTION

End Bent #1 and #2

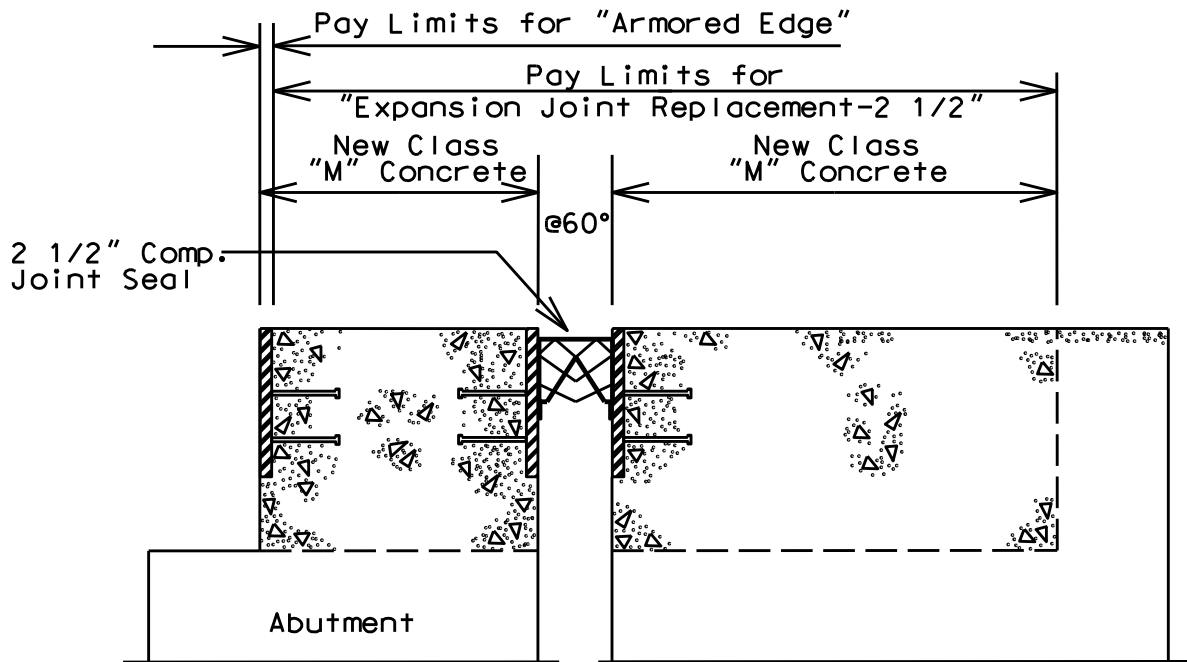

PROPOSED SECTION

End Bent #1 and #2

See Standard Drawing
No. BJE-001-10

CONTRACT ID: 112981
COUNTY: POWELL
PROPOSAL: FE02 099 0082 B00050N

PAGE: 1
LETTING: 09/23/11
CALL NO: 305

LINE NO	ITEM	DESCRIPTION	APPROXIMATE QUANTITY	UNIT	UNIT PRICE	AMOUNT
SECTION 0001 BRIDGE						
0010	02562	SIGNS	149.000	SQFT		
0020	02650	MAINTAIN & CONTROL TRAFFIC APPLIES TO B00050N	(1.00)	LS		
0030	02653	LANE CLOSURE	2.000	EACH		
0040	02654	TRUCK MOUNTED ATTENUATOR	1.000	EACH		
0050	03296	EXPAN JOINT REPLACE 2 1/2 IN	44.000	LF		
0051	03299	ARMORED EDGE FOR CONCRETE (ADDED: 9-20-11)	44.000	LF		
0060	03304	BRIDGE OVERLAY APPROACH PAVEMENT	116.000	SQYD		
0070	08150	STEEL REINFORCEMENT	266.000	LB		
SECTION 0002 DEMOBILIZATION						
0080	02569	DEMOBILIZATION (AT LEAST 1.5%)		LUMP		
		TOTAL BID				