



**COMMONWEALTH OF KENTUCKY  
TRANSPORTATION CABINET**  
Frankfort, Kentucky 40622  
[www.transportation.ky.gov/](http://www.transportation.ky.gov/)

**Matthew G. Bevin**  
Governor

**Greg Thomas**  
Secretary

April 18, 2016

CALL NO. 311  
CONTRACT ID NO. 162115  
ADDENDUM # 1

Subject: Crittenden County, FD05 028 0641 000-800  
Letting May 27, 2016

- (1) Added - Note - Page 11(a) of 86
- (2) Revised - Typical Section - Page 23 of 86
- (3) Revised - Bid Items - Page 86 of 86

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in cursive script that reads "Rachel Mills".

Rachel Mills, P.E.  
Director  
Division of Construction Procurement

RM:ks  
Enclosures



An Equal Opportunity Employer M/F/D


**SPECIAL NOTE FOR  
ASPHALT MILLING AND TEXTURING**

Begin paving operations within **48 hours** of commencement of the milling operation. Continue paving operations continuously until completed. If paving operations are not begun within this time period, the Department will assess liquidated damages at the rate prescribed by Section 108.09 until such time as paving operations are begun.

Take possession of the millings and recycle the millings or dispose of the millings off the Right-of-Way at sites obtained by the Contractor at no additional cost to the Department.

1-3520 48 hours Contractor keeps millings  
01/2/2012

**CRITTENDEN COUNTY**  
**FD05 028 0641 000-008**  
**TYPICAL SECTION**

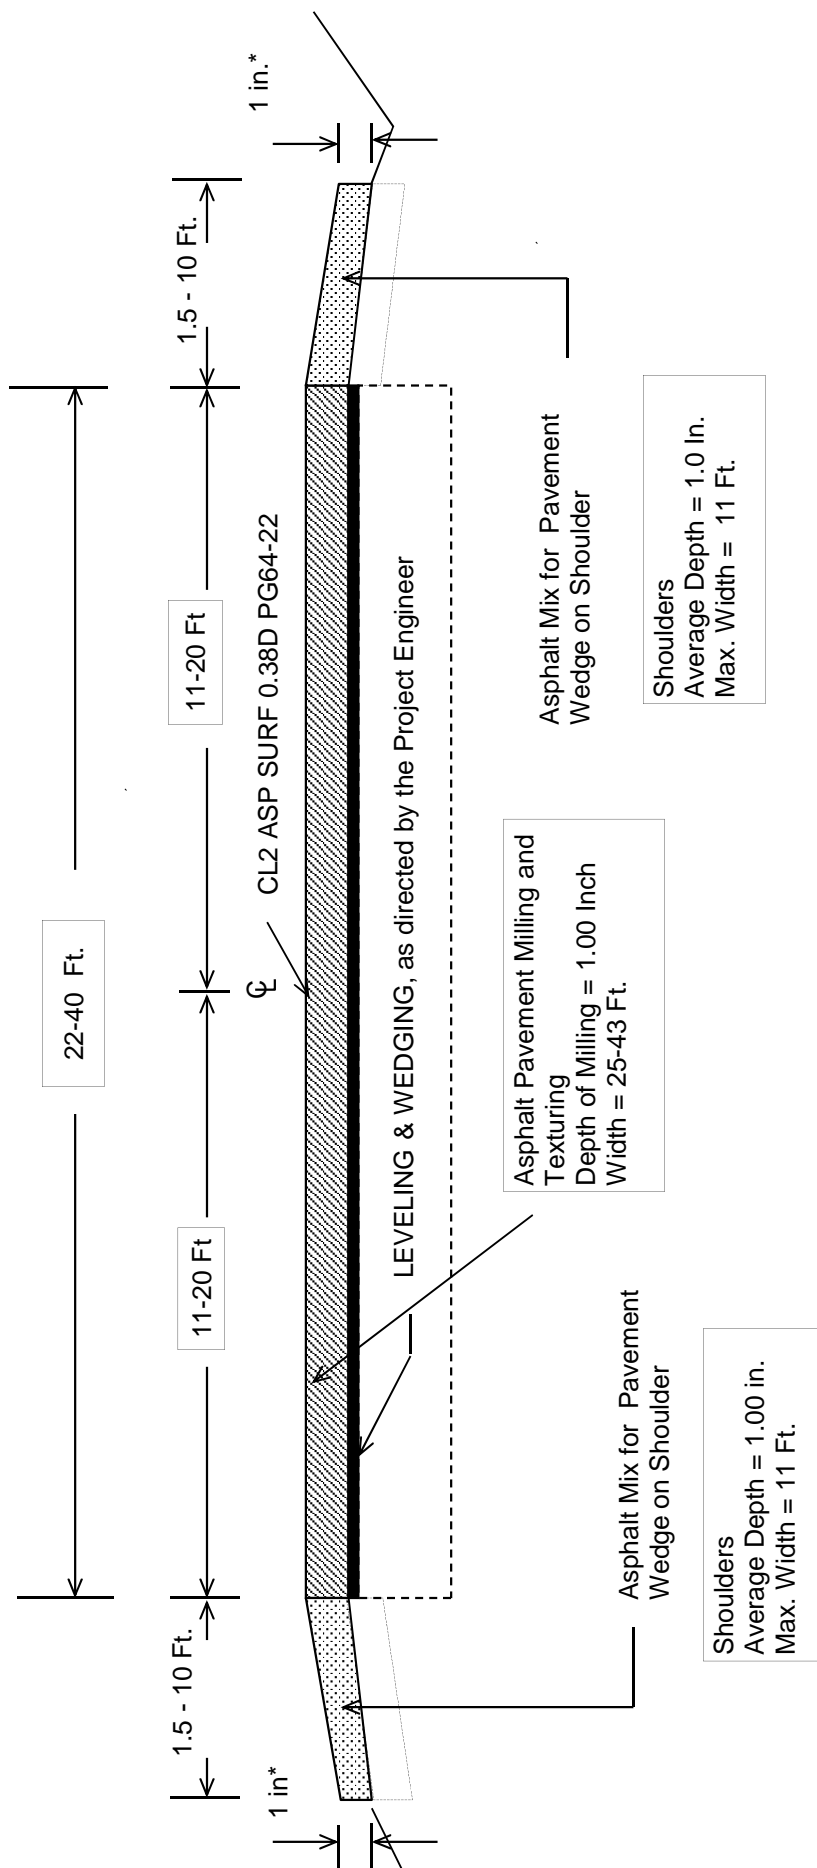

- \*Construct Centerline Rumble Strip MP 0.00 - 6.411**
- \*Construct Edgeline Rumble Strips MP 0.00 - 6.715**
- \*Where Existing Site Conditions Permit**

**PROPOSAL BID ITEMS**

162115

Page 1 of 1

Report Date 5/18/16

**Section: 0001 - PAVING**

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00190		LEVELING & WEDGING PG64-22	615.00	TON		\$	
0020	00263		ASPHALT MIX FOR PAVEMENT WEDGE	1,455.00	TON		\$	
0030	00301		CL2 ASPH SURF 0.38D PG64-22	5,980.00	TON		\$	
0040	02562		TEMPORARY SIGNS	630.00	SQFT		\$	
0050	02650		MAINTAIN & CONTROL TRAFFIC	1.00	LS		\$	
0060	02676		MOBILIZATION FOR MILL & TEXT	1.00	LS		\$	
0070	02677		ASPHALT PAVE MILLING & TEXTURING	7,500.00	TON		\$	
0080	06510		PAVE STRIPING-TEMP PAINT-4 IN	168,000.00	LF		\$	
0090	06514		PAVE STRIPING-PERM PAINT-4 IN	168,000.00	LF		\$	
0100	06568		PAVE MARKING-THERMO STOP BAR-24IN	12.00	LF		\$	
0110	06574		PAVE MARKING-THERMO CURV ARROW	3.00	EACH		\$	
0120	06600		REMOVE PAVEMENT MARKER TYPE V	931.00	EACH		\$	
0130	10020NS		FUEL ADJUSTMENT	12,531.00	DOLL	\$1.00	\$	\$12,531.00
0140	10030NS		ASPHALT ADJUSTMENT	31,473.00	DOLL	\$1.00	\$	\$31,473.00
0141	20458ES403		CENTERLINE RUMBLE STRIPS (ADDED: 5-18-16)	33,850.00	LF		\$	
0142	23595EC		RUMBLE STRIPE-SAW CUT (ADDED: 5-1816)	70,910.00	LF		\$	

**Section: 0002 - DEMOBILIZATION**

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0150	02569		DEMOBILIZATION	1.00	LS		\$	