



**TRANSPORTATION CABINET**

Frankfort, Kentucky 40622  
www.transportation.ky.gov/

**Steven L. Beshear**  
Governor

**Michael W. Hancock, P.E.**  
Secretary

May 27, 2014

CALL NO. 324  
CONTRACT ID NO. 142177  
ADDENDUM # 1

Subject: Knox County, FD05 061 025E 016-022  
Letting May 30, 2014

- (1) Revised - Typical Sections - Pages 33-35 of 75
- (2) Revised - Bid Items - Page 75 of 75

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in blue ink that reads "Diana Castle Radcliffe".

Diana Castle Radcliffe  
Director  
Division of Construction Procurement


DR:ks  
Enclosures



An Equal Opportunity Employer M/F/D

**KNOX COUNTY**  
**FD05 061 025E 016-022**  
**MP 16.900-21.715**

**TYPICAL HALF SECTION**

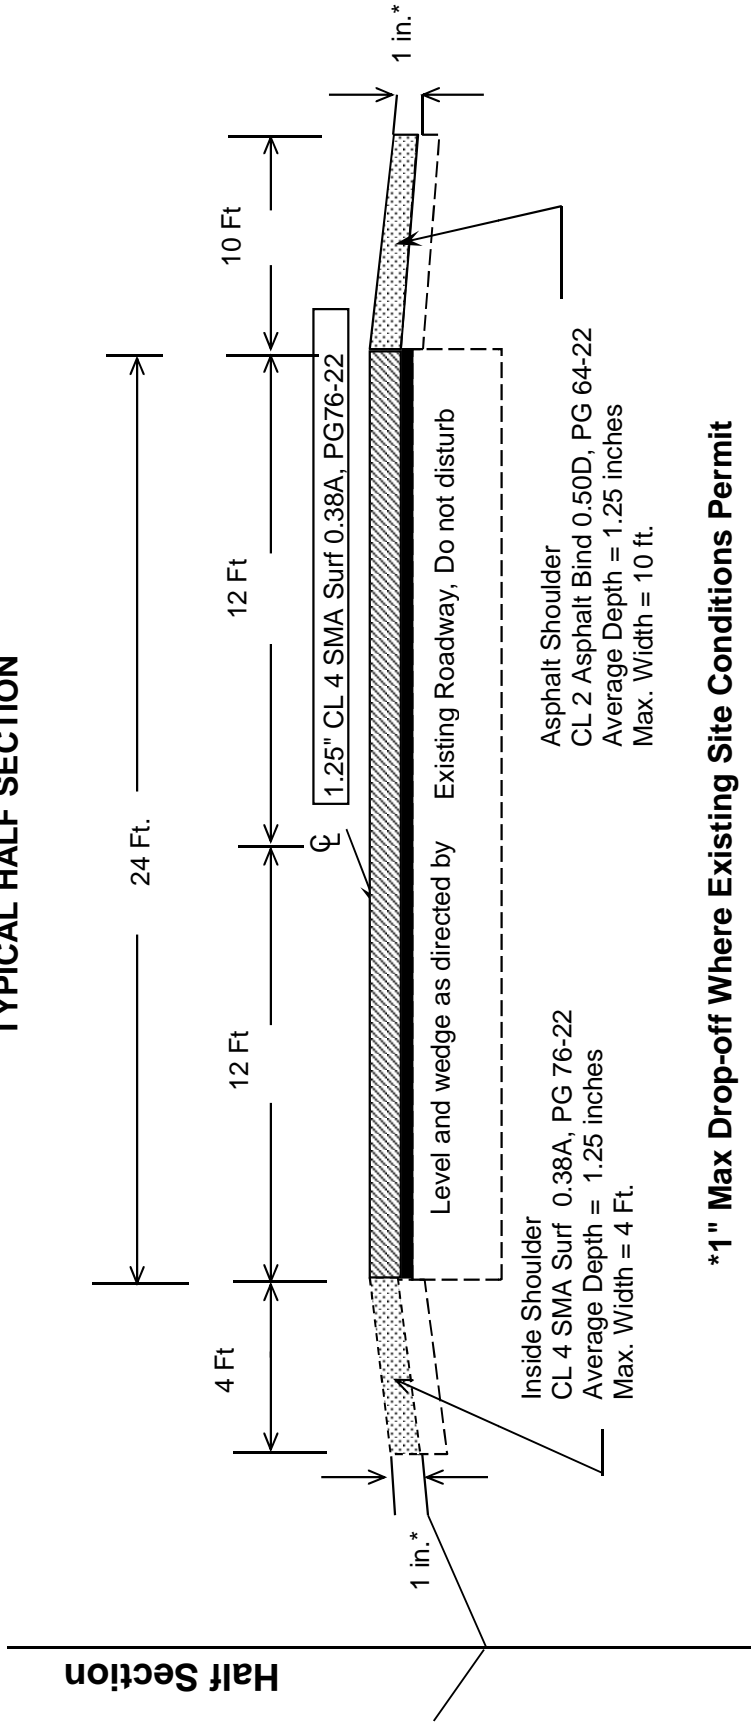


**\*1" Max Drop-off Where Existing Site Conditions Permit**

**KNOX COUNTY**

**FD05 061 025E 016-022  
Mainline Base Failure Repairs**

**TYPICAL HALF SECTION**

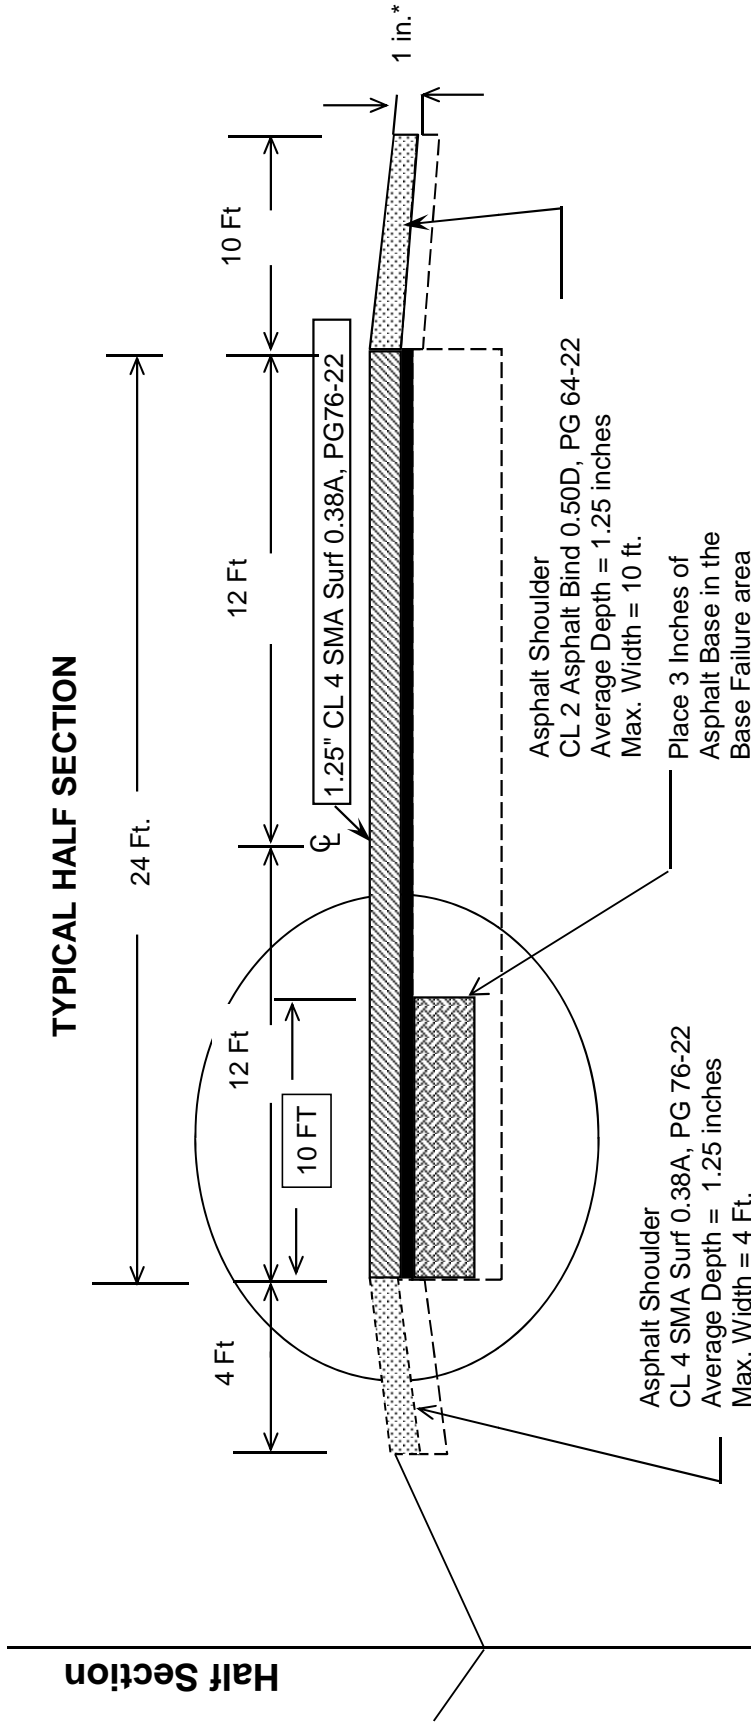

\*Typical MP 21.100 North  
and MP 21.713 and 21.520  
South


**\*1" Max Drop-off Where Existing Site Conditions Permit**

Half Section

KNOX COUNTY

FD05 061 025E 016-022  
Shoulder Base Failure Repairs

TYPICAL HALF SECTION

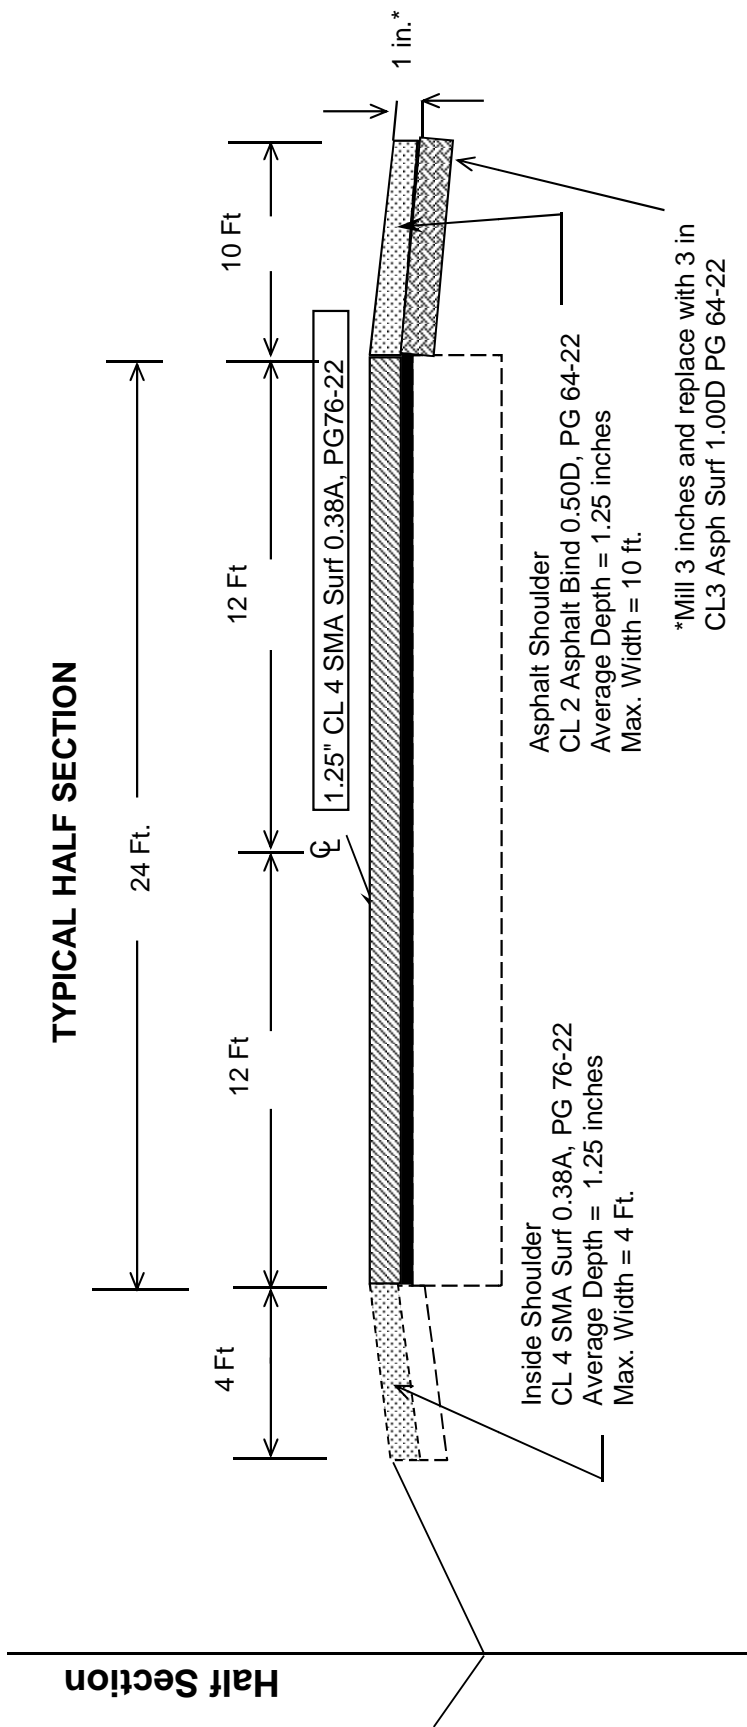

\*Mill 3 inches and replace with 3 in  
CL3 Asph Surf 1.00D PG 64-22

\*Typical for Mile Points  
listed in Shoulder Base  
Failure Summary.

**\*1" Max Drop-off Where Existing Site Conditions Permit**

## PROPOSAL BID ITEMS

142177

Page 1 of 1

Report Date 5/27/14

### Section: 0001 - PAVING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRICE	FP	AMOUNT
0010	00190		LEVELING & WEDGING PG64-22	1,125.00	TON		\$	
0020	00214		CL3 ASPH BASE 1.00D PG64-22	2,681.00	TON		\$	
0030	00272		CL2 ASPH BIND 0.50D PG64-22 REVISED: 5-27-14	3,890.00	TON		\$	
0040	00397		CL4 SMA SURF 0.38A PG76-22	14,605.00	TON		\$	
0050	02014		BARRICADE-TYPE III	3.00	EACH		\$	
0060	02562		TEMPORARY SIGNS	150.00	SQFT		\$	
0070	02650		MAINTAIN & CONTROL TRAFFIC (US 25E MP 5.430-6.930)	1.00	LS		\$	
0080	02671		PORTABLE CHANGEABLE MESSAGE SIGN	2.00	EACH		\$	
0090	02676		MOBILIZATION FOR MILL & TEXT (US 25E MP 5.430-6.930)	1.00	LS		\$	
0100	02677		ASPHALT PAVE MILLING & TEXTURING	2,891.00	TON		\$	
0110	02696		SHOULDER RUMBLE STRIPS-SAWED	101,693.00	LF		\$	
0120	02775		ARROW PANEL	2.00	EACH		\$	
0130	06510		PAVE STRIPING-TEMP PAINT-4 IN	57,250.00	LF		\$	
0140	06514		PAVE STRIPING-PERM PAINT-4 IN	114,500.00	LF		\$	
0150	06568		PAVE MARKING-THERMO STOP BAR-24IN	24.00	LF		\$	
0160	06569		PAVE MARKING-THERMO CROSS-HATCH	420.00	SQFT		\$	
0170	06574		PAVE MARKING-THERMO CURV ARROW	75.00	EACH		\$	
0180	06600		REMOVE PAVEMENT MARKER TYPE V	640.00	EACH		\$	
0190	10020NS		FUEL ADJUSTMENT	34,713.00	DOLL	\$1.00	\$	\$34,713.00
0200	10030NS		ASPHALT ADJUSTMENT	87,188.00	DOLL	\$1.00	\$	\$87,188.00

### Section: 0002 - DEMOBLIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRICE	FP	AMOUNT
0210	02569		DEMOBILIZATION	1.00	LS		\$	