



COMMONWEALTH OF KENTUCKY
TRANSPORTATION CABINET
www.transportation.ky.gov/

Andy Beshear
GOVERNOR

Jim Gray
SECRETARY

August 11, 2021

CALL NO. 411
CONTRACT ID NO. 213135
ADDENDUM # 1

Subject: Hancock County, 046GR21R069-CB06
Letting August 20, 2021

- (1) Revised - Special Note - Page 10 of 61
- (2) Added - Special Note - Pages 10a of 61
- (3) Revised - Material Summary - Page 35 of 61
- (4) Revised - Proposal Bid Items - Page 61 of 61

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

Rachel Mills,

A handwritten signature in cursive script that reads "Rachel Mills".

Rachel Mills, P.E.
Director
Division of Construction Procurement

RM:mr
Enclosures

Special Notes for Contract

Level and Wedging Bid Item:

Approximately 200 Tons of Leveling and Wedging Bid Item is intended to be used for superelevation corrections at MP 1.20 and MP 1.58. Leveling and Wedging depths will vary between 1 to 8 Inches. A combination of Asphalt Base and Asphalt Surface will to be used. Exact locations and depths to be determined by Engineer.

Asphalt Base Bid Item:

Approximately 40 tons of Asphalt Base is intended to build a turnaround on Old KY 2181. Approximately 60 tons of Asphalt Base is intended to be used to widen the roadway on KY 2181 at MP 1.20 and MP 1.58. It is the intent to have the widening pavement structure shall match the existing pavement structure. Exact locations and depths to be determined by Engineer.

Construct Turnaround on Old KY 2181:


Construct at turnaround on old KY 2181. It will be approximately 24 foot wide and 50 foot long. The pavement structure will be 6 IN of DGA, 4.5 IN of Asphalt Base and 1 IN of Asphalt Surface. It will also require a 50 foot Longitudinal Edge Key to tie the Asphalt Base into the existing roadway. Approximately 45 Linear Feet of 15 IN culvert pipe will also be installed in the roadside ditch, to accommodate this widening. The area needs to be graded to drain. All grade work will be incidental to the DGA.

Widening Areas:

Widening areas will be excavated to receive 6 IN of DGA plus the existing pavement structure. Excavation for widening will be incidental to the DGA. Exact locations and depths to be determined by Engineer. Longitudinal Edge Key will be used at all widening locations.

Remove Pavement:

The pavement removal area needs to be graded to drain. All grade work will be incidental to Remove Pavement. Backfill material needed to establish seed will be incidental to Remove Pavement. Remove Pavement areas will receive Permanent Seed and Protection.

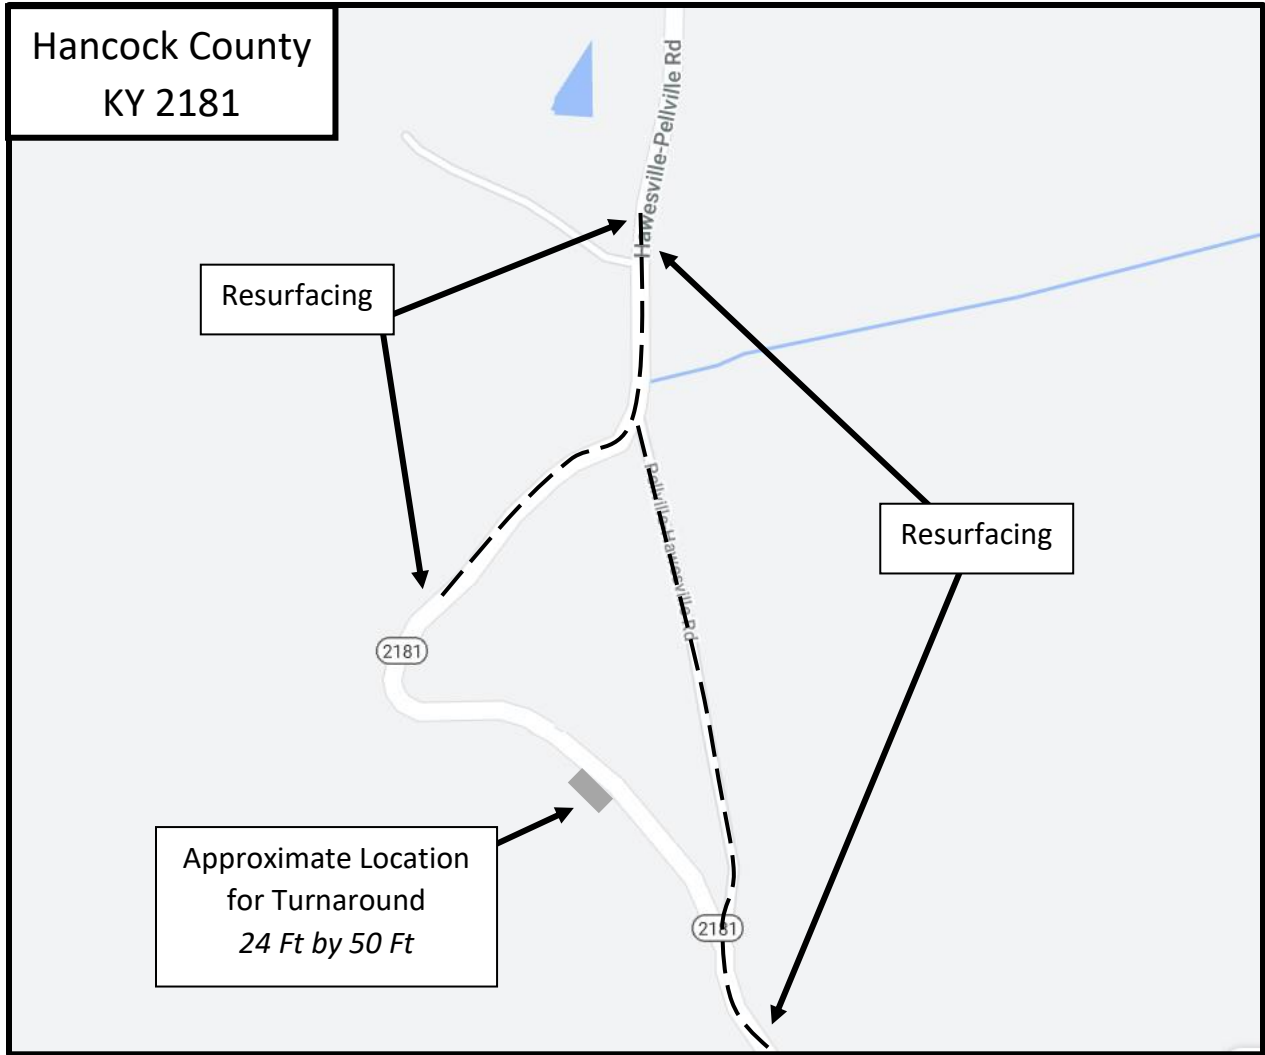

CB06 046 2181 001 002

MATERIAL SUMMARY

CONTRACT ID: 213135

046GR21R069-CB06

0204621812101

KY-2181 (KY 2181) FROM 0.008 MILES NORTH OF DUTCH BILL LOOP EXTENDING NORTH TO 0.121 MILES NORTH OF DUTCH BILL LOOP ASPHALT RESURFACING, A DISTANCE OF .5 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0145	00001	DGA BASE	170.00	TON
0150	00190	LEVELING & WEDGING PG64-22	380.00	TON
0155	00212	CL2 ASPH BASE 1.00D PG64-22	100.00	TON
0160	00301	CL2 ASPH SURF 0.38D PG64-22	480.00	TON
0165	00440	ENTRANCE PIPE-15 IN	45.00	LF
0170	02091	REMOVE PAVEMENT	250.00	SQYD
0175	02383	REMOVE & RESET GUARDRAIL	200.00	LF
0180	02562	TEMPORARY SIGNS	160.00	SQFT
0185	02650	MAINTAIN & CONTROL TRAFFIC - (KY 2181)	1.00	LS
0190	02676	MOBILIZATION FOR MILL & TEXT - (KY 2181)	1.00	LS
0195	02677	ASPHALT PAVE MILLING & TEXTURING	20.00	TON
0200	03250	WATERPROOFING MEMBRANE	50.00	SQYD
0205	05985	SEEDING AND PROTECTION - (ADDED: 8/10/2021)	200.00	SQYD
0210	06510	PAVE STRIPING-TEMP PAINT-4 IN	3,700.00	LF
0215	06514	PAVE STRIPING-PERM PAINT-4 IN	6,500.00	LF
0220	08808	GUARDRAIL-BRIDGE CASE II	40.00	LF
0225	10020NS	FUEL ADJUSTMENT	1,499.00	DOLL
0230	10030NS	ASPHALT ADJUSTMENT	3,765.00	DOLL
0235	20430ED	SAW CUT	150.00	LF
0240	21289ED	LONGITUDINAL EDGE KEY	370.00	LF
0245	24096EC	REMOVE AND RESET END TREATMENT	3.00	EACH
0250	24970EC	ASPHALT MATERIAL FOR TACK NON-TRACKING	3.00	TON
0255	02569	DEMOBILIZATION	1.00	LS

PROPOSAL BID ITEMS

213135

Page 1 of 1

Report Date 8/10/21

Section: 0001 - PAVING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	365.00	TON		\$	
0020	00190		LEVELING & WEDGING PG64-22	560.00	TON		\$	
0030	00212		CL2 ASPH BASE 1.00D PG64-22	100.00	TON		\$	
0040	00301		CL2 ASPH SURF 0.38D PG64-22	2,440.00	TON		\$	
0050	00440		ENTRANCE PIPE-15 IN	45.00	LF		\$	
0060	02091		REMOVE PAVEMENT	250.00	SQYD		\$	
0070	02383		REMOVE & RESET GUARDRAIL	200.00	LF		\$	
0080	02562		TEMPORARY SIGNS	480.00	SQFT		\$	
0090	02650		MAINTAIN & CONTROL TRAFFIC (KY 1389)	1.00	LS		\$	
0100	02650		MAINTAIN & CONTROL TRAFFIC (KY 1847)	1.00	LS		\$	
0110	02650		MAINTAIN & CONTROL TRAFFIC (KY 2181)	1.00	LS		\$	
0120	02676		MOBILIZATION FOR MILL & TEXT (KY 1389)	1.00	LS		\$	
0130	02676		MOBILIZATION FOR MILL & TEXT (KY 1847)	1.00	LS		\$	
0140	02676		MOBILIZATION FOR MILL & TEXT (KY 2181)	1.00	LS		\$	
0150	02677		ASPHALT PAVE MILLING & TEXTURING	90.00	TON		\$	
0160	03240		BASE FAILURE REPAIR	28.00	SQYD		\$	
0170	03250		WATERPROOFING MEMBRANE	50.00	SQYD		\$	
0180	05985		SEEDING AND PROTECTION (ADDED: 8/10/2021)	200.00	SQYD		\$	
0190	06510		PAVE STRIPING-TEMP PAINT-4 IN	18,100.00	LF		\$	
0200	06514		PAVE STRIPING-PERM PAINT-4 IN	32,000.00	LF		\$	
0210	06569		PAVE MARKING-THERMO CROSS-HATCH	770.00	SQFT		\$	
0220	08808		GUARDRAIL-BRIDGE CASE II	40.00	LF		\$	
0230	10020NS		FUEL ADJUSTMENT	4,976.00	DOLL	\$1.00	\$	\$4,976.00
0240	10030NS		ASPHALT ADJUSTMENT	12,499.00	DOLL	\$1.00	\$	\$12,499.00
0250	20430ED		SAW CUT	150.00	LF		\$	
0260	21289ED		LONGITUDINAL EDGE KEY	370.00	LF		\$	
0270	24096EC		REMOVE AND RESET END TREATMENT	3.00	EACH		\$	
0280	24970EC		ASPHALT MATERIAL FOR TACK NON-TRACKING	12.00	TON		\$	

Section: 0002 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0290	02569		DEMOBILIZATION	1.00	LS		\$	