



**COMMONWEALTH OF KENTUCKY  
TRANSPORTATION CABINET**  
Frankfort, Kentucky 40622  
[www.transportation.ky.gov/](http://www.transportation.ky.gov/)

**Matthew G. Bevin**  
Governor

**Greg Thomas**  
Secretary

June 17, 2016

CALL NO. 418  
CONTRACT ID NO. 163122  
ADDENDUM # 1

Subject: Hardin County, 047GR16000R020-CB06  
Letting June 24, 2016

- (1) Added - Special Note - Page 11(a) of 93
- (2) Revised - Material Summary - Pages 22-24 of 93
- (3) Revised - Typical Section - Pages 32-33 of 93
- (4) Revised - Bid Items - Page 93 of 93

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in cursive script that reads "Rachel Mills".

Rachel Mills, P.E.  
Director  
Division of Construction Procurement

RM:ks  
Enclosures



An Equal Opportunity Employer M/F/D

**SPECIAL NOTE FOR PAVEMENT WEDGE AND SHOULDER  
SEPARATE OPERATION  
(KY 1868 & KY 1357)**


**1.0 MATERIALS.** Provide an Asphalt Mixture for Pavement Wedge conforming to Section 407 of the Standard Specifications or an Asphalt Surface Mixture conforming to Section 403 of the Standard Specifications, as applicable to the project, for the pavement wedge.

**2.0 CONSTRUCTION.** Place the Asphalt Mixture for Pavement Wedge or Asphalt Surface Mixture as a separate operation from the driving lane. Prime the existing shoulder with tack material as the Engineer directs before placing the wedge. Construct according to Sections 407.03 and 403.03 as applicable.

When the Engineer deems it appropriate to pave both the driving lane and the adjoining wedge monolithically, equip the paver with a modified screed that extends the full width of the wedge being placed and is tapered to produce a wedge. Obtain the Engineer's approval of the modified screed before placing shoulder wedge monolithically with the driving lane.

The wedge may vary in thickness at the edge of the driving lanes. Where existing site conditions permit, limit the outside edge thickness of the new paving limits to one inch above the existing shoulder wedge elevation. If an Asphalt Surface Mixture is furnished for the pavement wedge, texture according to Section 403.03.08.

The following sketch is primarily for the computation of quantities; however, the wedge will result in a similar cross-section where sufficient width exists. Do not construct a shoulder for placing the wedge unless specified elsewhere in the Contract.

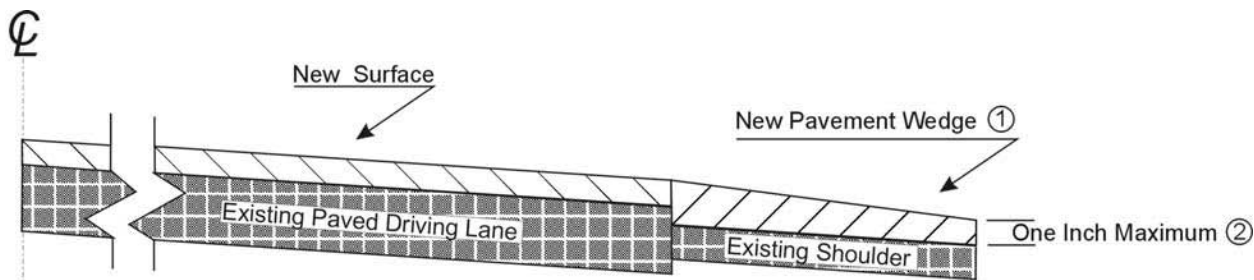

- ① Slope varies, but is down from the driving lanes except on outside of some curves where superelevation controls.
- ② Where existing site conditions permit.

**3.0 MEASUREMENT.** The Department will measure Asphalt Mixture for Pavement Wedge or Asphalt Surface Mixture placed as the pavement wedge according to Sections 403 and 407 as applicable.

**4.0 PAYMENT.** The Department will make payment for the completed and accepted quantities of Asphalt Surface Mixtures placed as pavement wedge according to Section 403. The Department will make payment for the completed and accepted quantities of Asphalt Mixture for Pavement Wedge according to Section 407.

# MATERIAL SUMMARY

**CONTRACT ID: 163122**

**047GR16000R020-CB06**

**0404702201601**

RINEYVILLE-BIG SPRINGS RD (KY 220) FROM KY 920 EXTENDING EAST TO KY 1375 ASPHALT RESURFACING, A DISTANCE OF 3.45 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00001	DGA BASE	175.00	TON
0010	00190	LEVELING & WEDGING PG64-22	429.00	TON
0015	00301	CL2 ASPH SURF 0.38D PG64-22 - (REVISED: 6-17-16)	2,085.00	TON
0020	02562	TEMPORARY SIGNS	230.00	SQFT
0025	02650	MAINTAIN & CONTROL TRAFFIC - (KY 220)	1.00	LS
0030	02676	MOBILIZATION FOR MILL & TEXT - (KY 220)	1.00	LS
0035	02677	ASPHALT PAVE MILLING & TEXTURING	40.00	TON
0040	06510	PAVE STRIPING-TEMP PAINT-4 IN - (REVISED: 6-17-16)	36,474.00	LF
0045	06514	PAVE STRIPING-PERM PAINT-4 IN - (REVISED: 6-17-16)	40,121.00	LF
0050	10020NS	FUEL ADJUSTMENT	3,913.00	DOLL
0055	10030NS	ASPHALT ADJUSTMENT	9,829.00	DOLL
0060	02569	DEMOBILIZATION	1.00	LS

**CONTRACT ID: 163122**

**047GR16000R020-CB06**

**0404713571601**

SAINT JOHN ROAD (KY 1357) FROM KY 2213 EXTENDING EAST TO KY 920 ASPHALT RESURFACING, A DISTANCE OF 3.38 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00190	LEVELING & WEDGING PG64-22	419.00	TON
0010	00301	CL2 ASPH SURF 0.38D PG64-22 - (REVISED: 6-17-16)	1,949.00	TON
0015	02562	TEMPORARY SIGNS	210.00	SQFT
0020	02650	MAINTAIN & CONTROL TRAFFIC - (KY 1357)	1.00	LS
0025	02676	MOBILIZATION FOR MILL & TEXT - (KY 1357)	1.00	LS
0030	02677	ASPHALT PAVE MILLING & TEXTURING	35.00	TON
0040	06514	PAVE STRIPING-PERM PAINT-4 IN - (REVISED: 6-17-16)	39,204.00	LF
0045	10020NS	FUEL ADJUSTMENT	3,828.00	DOLL
0050	10030NS	ASPHALT ADJUSTMENT	9,614.00	DOLL
0055	02569	DEMOBILIZATION	1.00	LS
0060	00263	ASPHALT MIX FOR PAVEMENT WEDGE - (ADDED: 6-17-16)	422.00	TON

# MATERIAL SUMMARY

**CONTRACT ID: 163122**

**047GR16000R020-CB06**

**0404713751601**

S LONG GROVE ROAD (KY 1375) FROM KY 1823 EXTENDING NORTH TO U.S. 62 ASPHALT RESURFACING, A DISTANCE OF 4.16 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00190	LEVELING & WEDGING PG64-22	486.00	TON
0010	00301	CL2 ASPH SURF 0.38D PG64-22 - (REVISED: 6-17-16)	2,770.00	TON
0015	02562	TEMPORARY SIGNS	230.00	SQFT
0020	02650	MAINTAIN & CONTROL TRAFFIC - (KY 1375)	1.00	LS
0025	02676	MOBILIZATION FOR MILL & TEXT - (KY 1375)	1.00	LS
0030	02677	ASPHALT PAVE MILLING & TEXTURING	50.00	TON
0035	06510	PAVE STRIPING-TEMP PAINT-4 IN - (REVISED: 6-17-16)	43,950.00	LF
0040	06514	PAVE STRIPING-PERM PAINT-4 IN - (REVISED: 6-17-16)	48,345.00	LF
0045	10020NS	FUEL ADJUSTMENT	5,068.00	DOLL
0050	10030NS	ASPHALT ADJUSTMENT	12,730.00	DOLL
0055	02569	DEMOBILIZATION	1.00	LS

**CONTRACT ID: 163122**

**047GR16000R020-CB06**

**0404718681601**

NEW GLENDALE ROAD (KY 1868) FROM KY 720 EXTENDING NORTH TO KY 84 ASPHALT RESURFACING, A DISTANCE OF 3.03 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00190	LEVELING & WEDGING PG64-22	354.00	TON
0010	00301	CL2 ASPH SURF 0.38D PG64-22 - (REVISED: 6-17-16)	1,663.00	TON
0015	02562	TEMPORARY SIGNS	210.00	SQFT
0020	02650	MAINTAIN & CONTROL TRAFFIC - (KY 1868)	1.00	LS
0025	02676	MOBILIZATION FOR MILL & TEXT - (KY 1868)	1.00	LS
0030	02677	ASPHALT PAVE MILLING & TEXTURING	30.00	TON
0035	03240	BASE FAILURE REPAIR	160.00	SQYD
0045	06514	PAVE STRIPING-PERM PAINT-4 IN - (REVISED: 6-17-16)	32,996.00	LF
0050	10020NS	FUEL ADJUSTMENT	3,687.00	DOLL
0055	10030NS	ASPHALT ADJUSTMENT	9,262.00	DOLL
0060	02569	DEMOBILIZATION	1.00	LS
0065	00263	ASPHALT MIX FOR PAVEMENT WEDGE - (ADDED: 6-17-16)	353.00	TON

# MATERIAL SUMMARY

**CONTRACT ID: 163122**


**047GR16000R020-CB06**

**0404719041601**

BACON CREEK ROAD (KY 1904) FROM KY 222 EXTENDING NORTH TO 0.134 MILES SOUTH OF KY 3005 ASPHALT RESURFACING, A DISTANCE OF 3.92 MILES.


Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00190	LEVELING & WEDGING PG64-22	543.00	TON
0010	00301	CL2 ASPH SURF 0.38D PG64-22 - (REVISED: 6-17-16)	3,025.00	TON
0015	02562	TEMPORARY SIGNS	190.00	SQFT
0020	02650	MAINTAIN & CONTROL TRAFFIC - (KY 1904)	1.00	LS
0025	02671	PORTABLE CHANGEABLE MESSAGE SIGN	2.00	EACH
0030	02676	MOBILIZATION FOR MILL & TEXT - (KY 1904)	1.00	LS
0035	02677	ASPHALT PAVE MILLING & TEXTURING	45.00	TON
0040	03240	BASE FAILURE REPAIR	1,035.00	SQYD
0045	06510	PAVE STRIPING-TEMP PAINT-4 IN - (REVISED: 6-17-16)	41,342.00	LF
0050	06514	PAVE STRIPING-PERM PAINT-4 IN - (REVISED: 6-17-16)	45,476.00	LF
0055	10020NS	FUEL ADJUSTMENT	13,949.00	DOLL
0060	10030NS	ASPHALT ADJUSTMENT	5,554.00	DOLL
0065	02569	DEMOBILIZATION	1.00	LS

**TYPICAL SECTION**  
HARDIN COUNTY  
CB06 047 1357 000 - 004  
MP 0.000 - 3.375

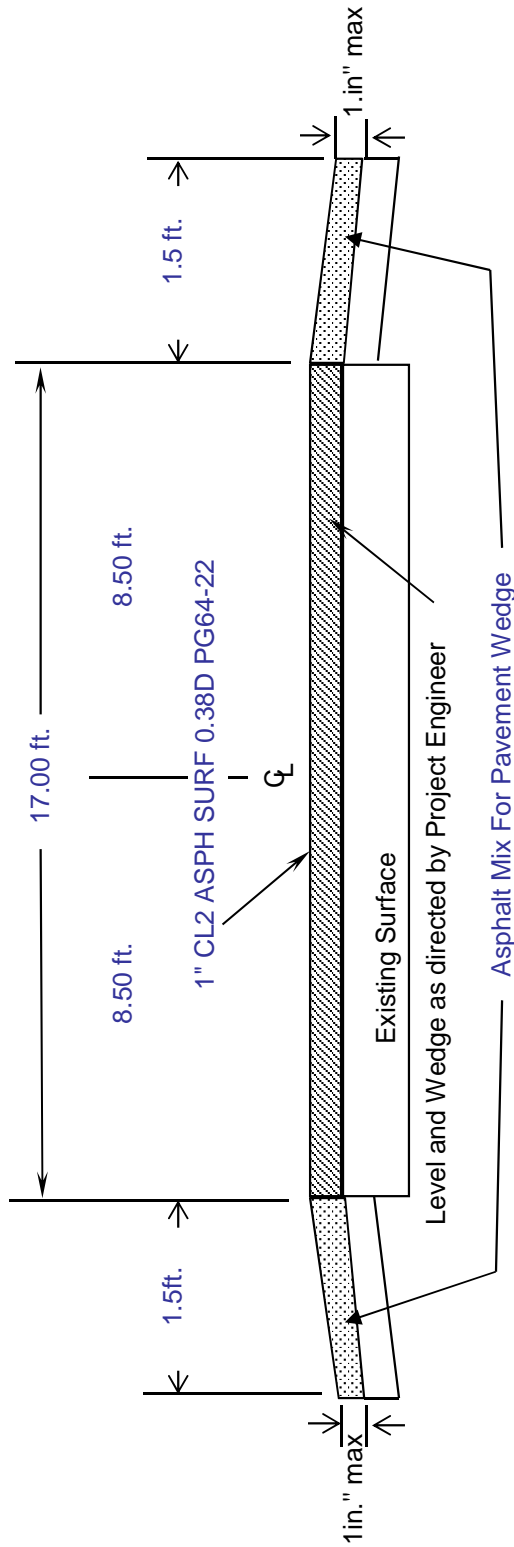

\* WHERE EXISTING CONDITIONS PERMIT  
EDGE KEYS AT THE BEGINNING AND END OF PROJECT

**TYPICAL SECTION**  
HARDIN COUNTY  
CB06 047 1868 000 - 004  
MP 0.000 - 3.028

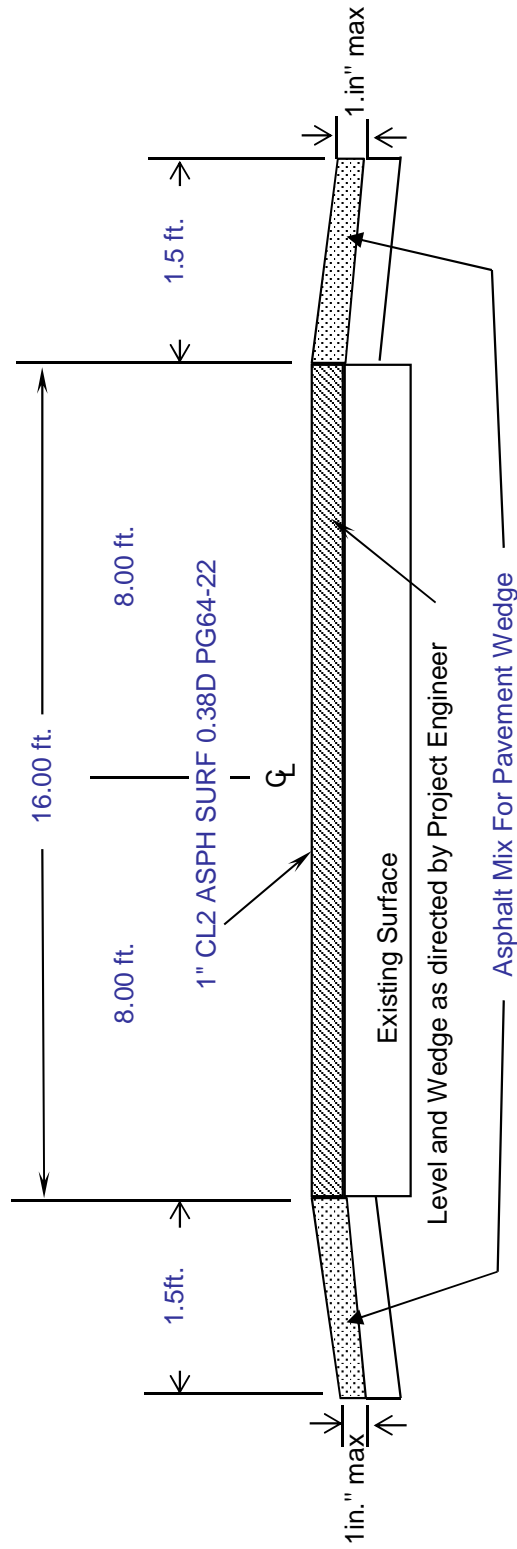

\*WHERE EXISTING CONDITIONS PERMIT  
EDGE KEYS AT THE BEGINNING AND END OF PROJECT

### PROPOSAL BID ITEMS

163122

Page 1 of 1

Report Date 6/17/16

#### Section: 0001 - PAVING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	175.00	TON		\$	
0020	00190		LEVELING & WEDGING PG64-22	2,231.00	TON		\$	
0021	00263		ASPHALT MIX FOR PAVEMENT WEDGE (ADDED: 6-17-16)	775.00	TON		\$	
0030	00301		CL2 ASPH SURF 0.38D PG64-22 (REVISED: 6-17-16)	11,492.00	TON		\$	
0040	02562		TEMPORARY SIGNS	1,070.00	SQFT		\$	
0050	02650		MAINTAIN & CONTROL TRAFFIC (KY 1357)	1.00	LS		\$	
0060	02650		MAINTAIN & CONTROL TRAFFIC (KY 1375)	1.00	LS		\$	
0070	02650		MAINTAIN & CONTROL TRAFFIC (KY 1868)	1.00	LS		\$	
0080	02650		MAINTAIN & CONTROL TRAFFIC (KY 1904)	1.00	LS		\$	
0090	02650		MAINTAIN & CONTROL TRAFFIC (KY 220)	1.00	LS		\$	
0100	02671		PORTABLE CHANGEABLE MESSAGE SIGN	2.00	EACH		\$	
0110	02676		MOBILIZATION FOR MILL & TEXT (KY 1357)	1.00	LS		\$	
0120	02676		MOBILIZATION FOR MILL & TEXT (KY 1375)	1.00	LS		\$	
0130	02676		MOBILIZATION FOR MILL & TEXT (KY 1868)	1.00	LS		\$	
0140	02676		MOBILIZATION FOR MILL & TEXT (KY 1904)	1.00	LS		\$	
0150	02676		MOBILIZATION FOR MILL & TEXT (KY 220)	1.00	LS		\$	
0160	02677		ASPHALT PAVE MILLING & TEXTURING	200.00	TON		\$	
0170	03240		BASE FAILURE REPAIR	1,195.00	SQYD		\$	
0180	06510		PAVE STRIPING-TEMP PAINT-4 IN (REVISED: 6-17-16)	121,766.00	LF		\$	
0190	06514		PAVE STRIPING-PERM PAINT-4 IN (REVISED: 6-17-16)	206,142.00	LF		\$	
0200	10020NS		FUEL ADJUSTMENT	30,445.00	DOLL	\$1.00	\$	\$30,445.00
0210	10030NS		ASPHALT ADJUSTMENT	46,989.00	DOLL	\$1.00	\$	\$46,989.00

#### Section: 0002 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0220	02569		DEMOBILIZATION	1.00	LS		\$	