



TRANSPORTATION CABINET

Frankfort, Kentucky 40622
www.transportation.ky.gov/

Steven L. Beshear
Governor

Michael W. Hancock, P.E.
Secretary

April 16, 2013

CALL NO. 420
CONTRACT ID NO. 132123
ADDENDUM # 1

Subject: Simpson County, 107GR13P046-FD05
Letting April 19, 2013

- (1) Revised - Table of Contents - Page 2 of 68
- (2) Deleted - Page 15 of 68
- (3) Revised - Special Note - Page 16 of 68
- (4) Revised - Material Summary - Pages 28-29 of 68
- (5) Revised - Typical Section - Pages 34-37 of 68
- (6) Revised - Bid Items - Page 68 of 68

Proposal revisions are available at <http://transportation.ky.gov/Construction-Procurement/>.

If you have any questions, please contact us at 502-564-3500.

Sincerely,

A handwritten signature in blue ink that reads "Ryan Griffith".

Ryan Griffith
Acting Director
Division of Construction Procurement

RG:ks
Enclosures



An Equal Opportunity Employer M/F/D

TABLE OF CONTENTS

PART I	SCOPE OF WORK <ul style="list-style-type: none">• PROJECT(S), COMPLETION DATE(S), & LIQUIDATED DAMAGES• CONTRACT NOTES• STATE CONTRACT NOTES• 2013 DEFERRED PAY• SURFACING AREAS• ASPHALT MIXTURE• DGA BASE FOR SHOULDERS• AGGREGATE FOR MAILBOX TURNOUTS• INCIDENTAL SURFACING• FUEL AND ASPHALT PAY ADJUSTMENT• COMPACTION OPTION A• COMPACTION OPTION B• WASTE AND BORROW SITES• BRIDGE DECK WATERPROOFING MEMBRANE & ASPH O'CONTRACTOR• ASPHALT MIX PAVEMENT WEDGE MONOLITHIC OPERATION• EDGE KEY• BASE FAILURE REPAIR• TYPICAL SECTION DIMENSIONS• TRAFFIC CONTROL PLAN 2 LANE• TRAFFIC CONTROL PLAN 3 LANE• SKETCH MAP(S)• MATERIAL SUMMARY• SUMMARY SHEET(S)• TYPICAL SECTION(S)• DETAIL SHEET(S)
PART II	SPECIFICATIONS AND STANDARD DRAWINGS <ul style="list-style-type: none">• SPECIFICATIONS REFERENCE• SUPPLEMENTAL SPECIFICATION• STANDARD DRAWINGS THAT APPLY ENTIRE LIST 2012
PART III	EMPLOYMENT, WAGE AND RECORD REQUIREMENTS <ul style="list-style-type: none">• LABOR AND WAGE REQUIREMENTS• EXECUTIVE BRANCH CODE OF ETHICS• KENTUCKY EQUAL EMPLOYMENT OPPORTUNITY ACT OF 1978 LOCALITY 1,2,3,4 / STATE (OVER 250,000)• PROJECT WAGE RATES LOCALITY 1 / FEDERAL & STATE
PART IV	INSURANCE
PART V	BID ITEMS

SPECIAL NOTE FOR PAVEMENT WEDGE AND SHOULDER MONOLITHIC OPERATION


1.0 MATERIALS. Provide an Asphalt Surface Mixture conforming to Section 403 of the Standard Specifications, as applicable to the project, for the pavement wedge.

2.0 CONSTRUCTION. Place the specified Asphalt Surface Mixture on shoulders monolithically with the driving lane. Prime the existing shoulder with tack material as the Engineer directs before placing the wedge. Construct according to Section 403.03 of the Standard Specifications.

Equip the paver with a modified screed that extends the full width of the wedge being placed and is tapered to produce a wedge. Obtain the Engineer's approval of the modified screed before placing shoulder wedge monolithically with the driving lane.

The wedge may vary in thickness at the edge of the milled area in the shoulder. If the area to receive the shoulder wedge is milled prior to placement, during rolling operations pinch the outside edge of the new inlay wedge to match the existing shoulder elevation not being resurfaced. Unless required otherwise by the Contract, construct rolled or sawed rumble strips according to Section 403.03.08, as applicable.

The following sketch is primarily for the computation of quantities; however, the wedge will result in a similar cross-section where sufficient width exists. Do not construct a shoulder for placing the wedge unless specified elsewhere in the Contract.

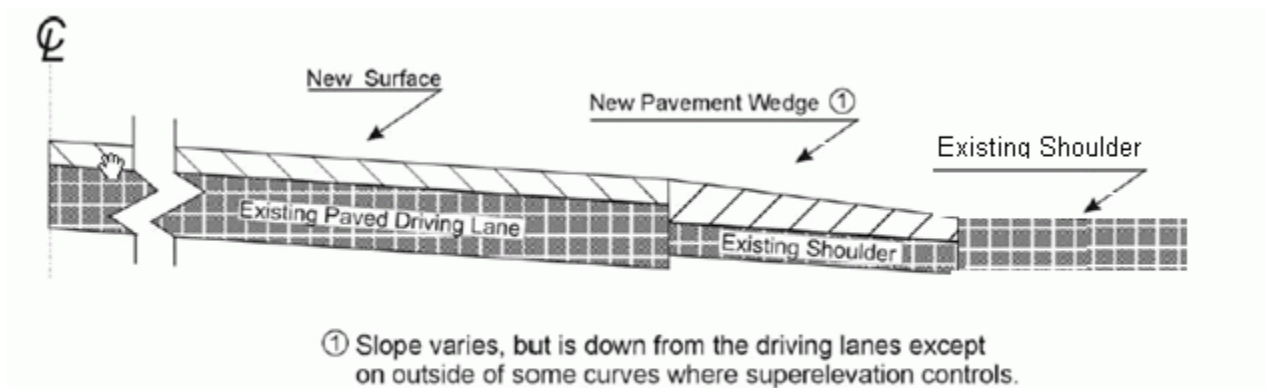

3.0 MEASUREMENT. The Department will measure Asphalt Surface Mixture placed as the pavement wedge according to Section 403.

4.0 PAYMENT. The Department will make payment for the completed and accepted quantities of Asphalt Surface Mixtures on pavement wedges according to Section 403.

MATERIAL SUMMARY

CONTRACT ID: 132123

107GR13P046-FD05

MP107031W1301

NASHVILLE ROAD (US 31W) FROM BROADWAY EXTENDING NORTH TO WARREN COUNTY LINE ASPHALT RESURFACING, A DISTANCE OF 4.93 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0010	00001	DGA BASE	1,464.00	TON
0020	00077	AGGREGATE FOR MAILBOX TURNOUTS	175.00	TON
0030	00190	LEVELING & WEDGING PG64-22	1,017.00	TON
0050	00324	CL3 ASPH SURF 0.50B PG64-22 - (REVISED: 4-16-13)	6,825.00	TON
0060	02562	TEMPORARY SIGNS	350.00	SQFT
0070	02585	EDGE KEY	45.00	LF
0080	02650	MAINTAIN & CONTROL TRAFFIC - (US 31W)	1.00	LS
0090	03240	BASE FAILURE REPAIR	80.00	SQYD
0100	06510	PAVE STRIPING-TEMP PAINT-4 IN	121,500.00	LF
0110	06514	PAVE STRIPING-PERM PAINT-4 IN	121,500.00	LF
0120	06568	PAVE MARKING-THERMO STOP BAR-24IN	106.00	LF
0130	06570	PAVE MARKING-PAINT CROSS-HATCH	15,460.00	SQFT
0140	06574	PAVE MARKING-THERMO CURV ARROW	29.00	EACH
0150	06576	PAVE MARKING-THERMO ONLY	5.00	EACH
0160	06592	PAVEMENT MARKER TYPE V-B W/R	36.00	EACH
0170	06593	PAVEMENT MARKER TYPE V-B Y/R	286.00	EACH
0180	06600	REMOVE PAVEMENT MARKER TYPE V	943.00	EACH
0190	10020NS	FUEL ADJUSTMENT	12,206.00	DOLL
0200	10030NS	ASPHALT ADJUSTMENT	30,659.00	DOLL
0210	22950NN	PAVE MARKING-THERMO STOP	1.00	EACH
0220	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY

CONTRACT ID: 132123


107GR13P046-FD05

MP10703831301

SPRINGFIELD ROAD (KY 383) FROM KY 816 EXTENDING NORTH TO KY 1008 ASPHALT RESURFACING, A DISTANCE OF .9 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0010	00001	DGA BASE	273.00	TON
0020	00077	AGGREGATE FOR MAILBOX TURNOUTS	75.00	TON
0030	00190	LEVELING & WEDGING PG64-22	147.00	TON
0050	00301	CL2 ASPH SURF 0.38D PG64-22 - (REVISED: 4-16-13)	690.00	TON
0060	02562	TEMPORARY SIGNS	230.00	SQFT
0070	02585	EDGE KEY	40.00	LF
0080	02650	MAINTAIN & CONTROL TRAFFIC - (KY 383)	1.00	LS
0090	03240	BASE FAILURE REPAIR	45.00	SQYD
0100	03250	ONE STEP MEMBRANE	45.00	SQYD
0110	06510	PAVE STRIPING-TEMP PAINT-4 IN	5,500.00	LF
0120	06514	PAVE STRIPING-PERM PAINT-4 IN	10,000.00	LF
0130	06568	PAVE MARKING-THERMO STOP BAR-24IN	61.00	LF
0140	10020NS	FUEL ADJUSTMENT	1,428.00	DOLL
0150	10030NS	ASPHALT ADJUSTMENT	3,272.00	DOLL
0160	22950NN	PAVE MARKING-THERMO STOP	1.00	EACH
0170	02569	DEMOBILIZATION	1.00	LS

SIMPSON COUNTY
FD05 107 0383 007-009
KY 383
TYPICAL SECTION
MILEPOINTS 7.378 to 8.279

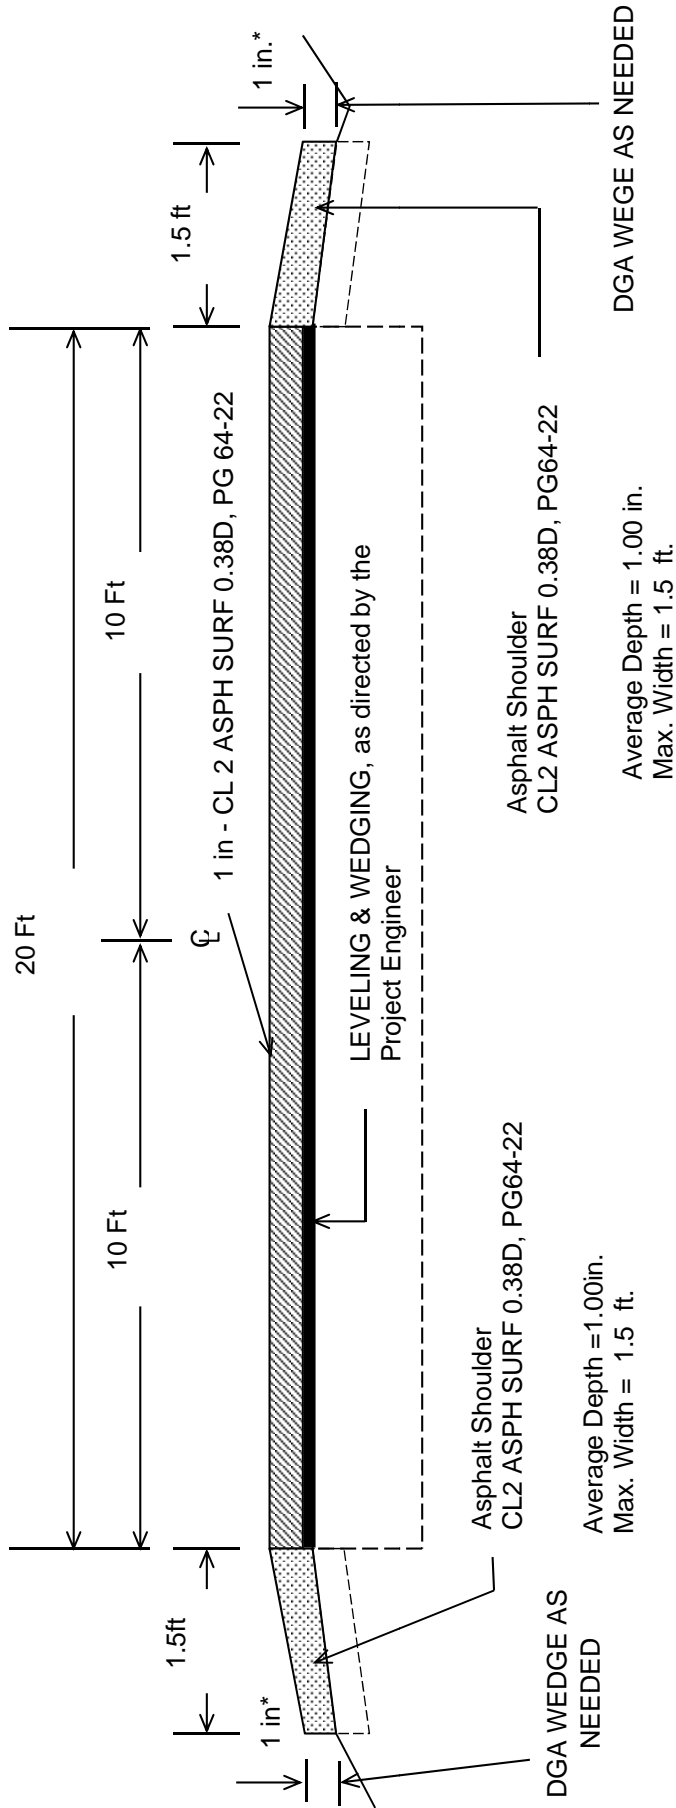

***1" Max Drop Off Where Existing Site Conditions Permit**

SIMPSON COUNTY

FD05 107 031W 009-014


US 31W

TYPICAL SECTION

MILEPOINTS 9.053 - 9.40


9.906 - 11.127

11.610 - 13.984

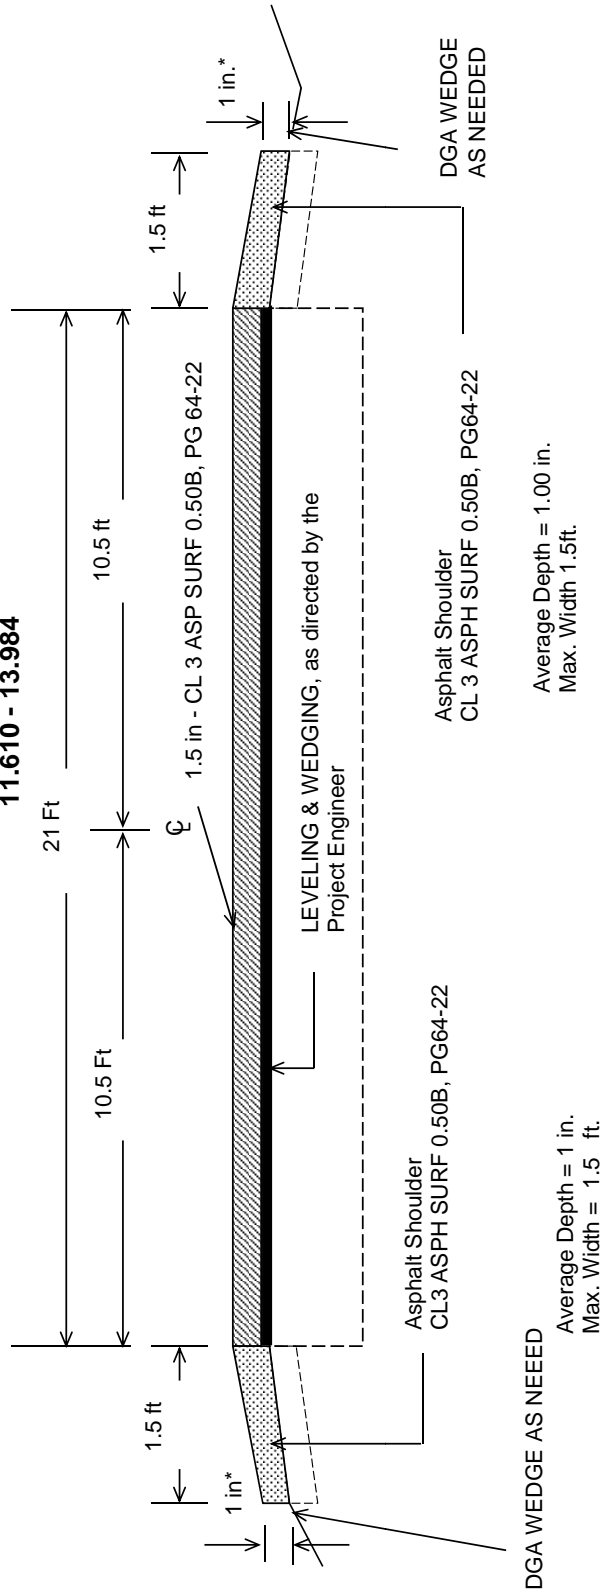


***1" Max Drop Off Where Existing Site Conditions Permit**

TYPICAL SECTION

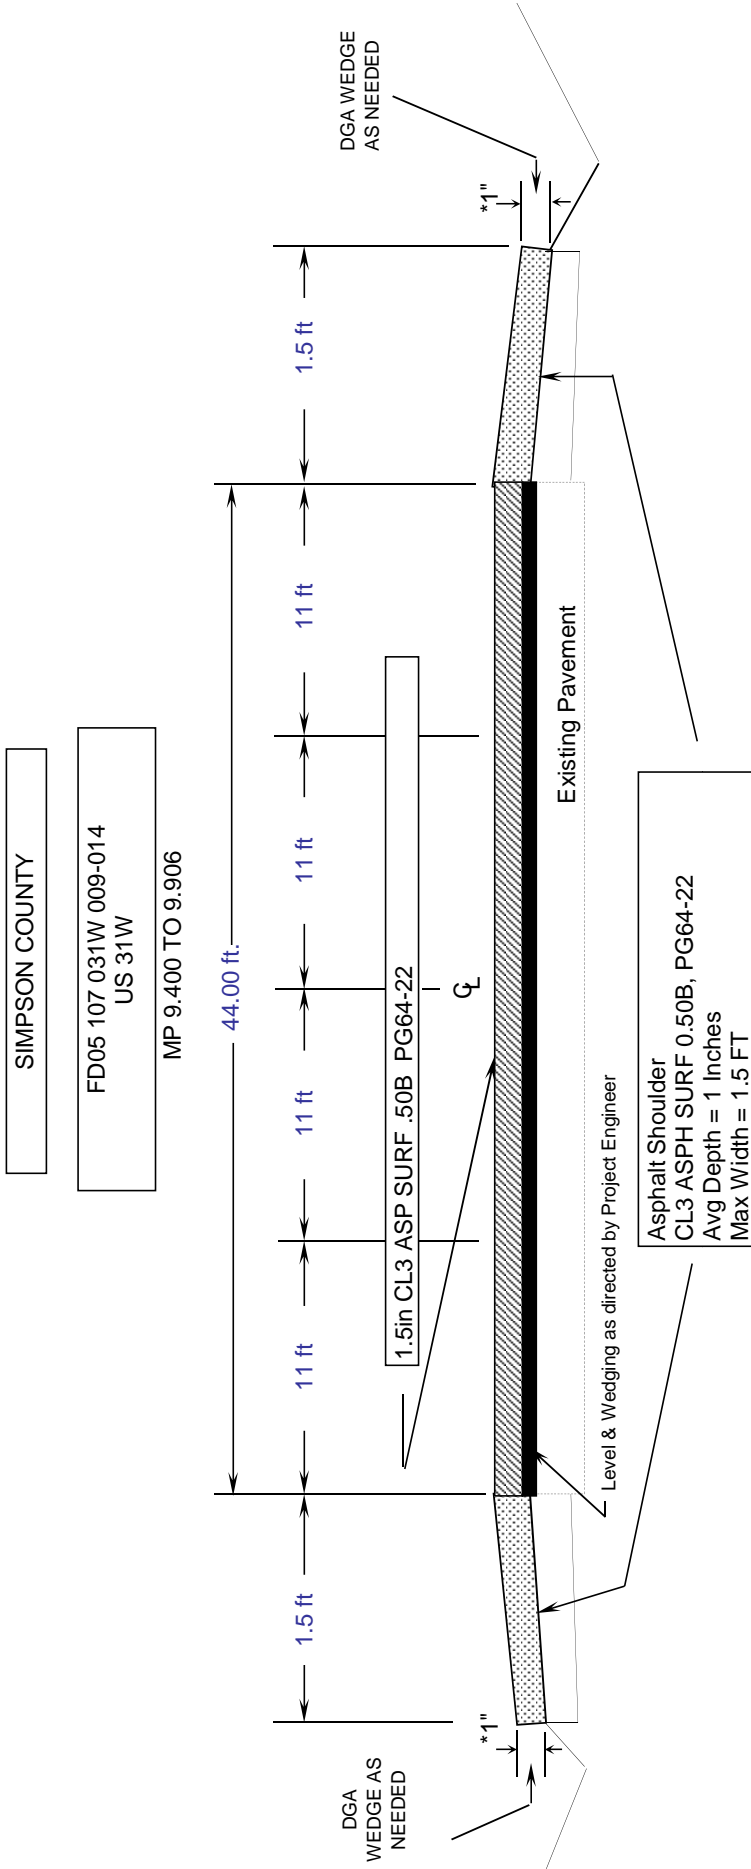

TYPICAL SECTION

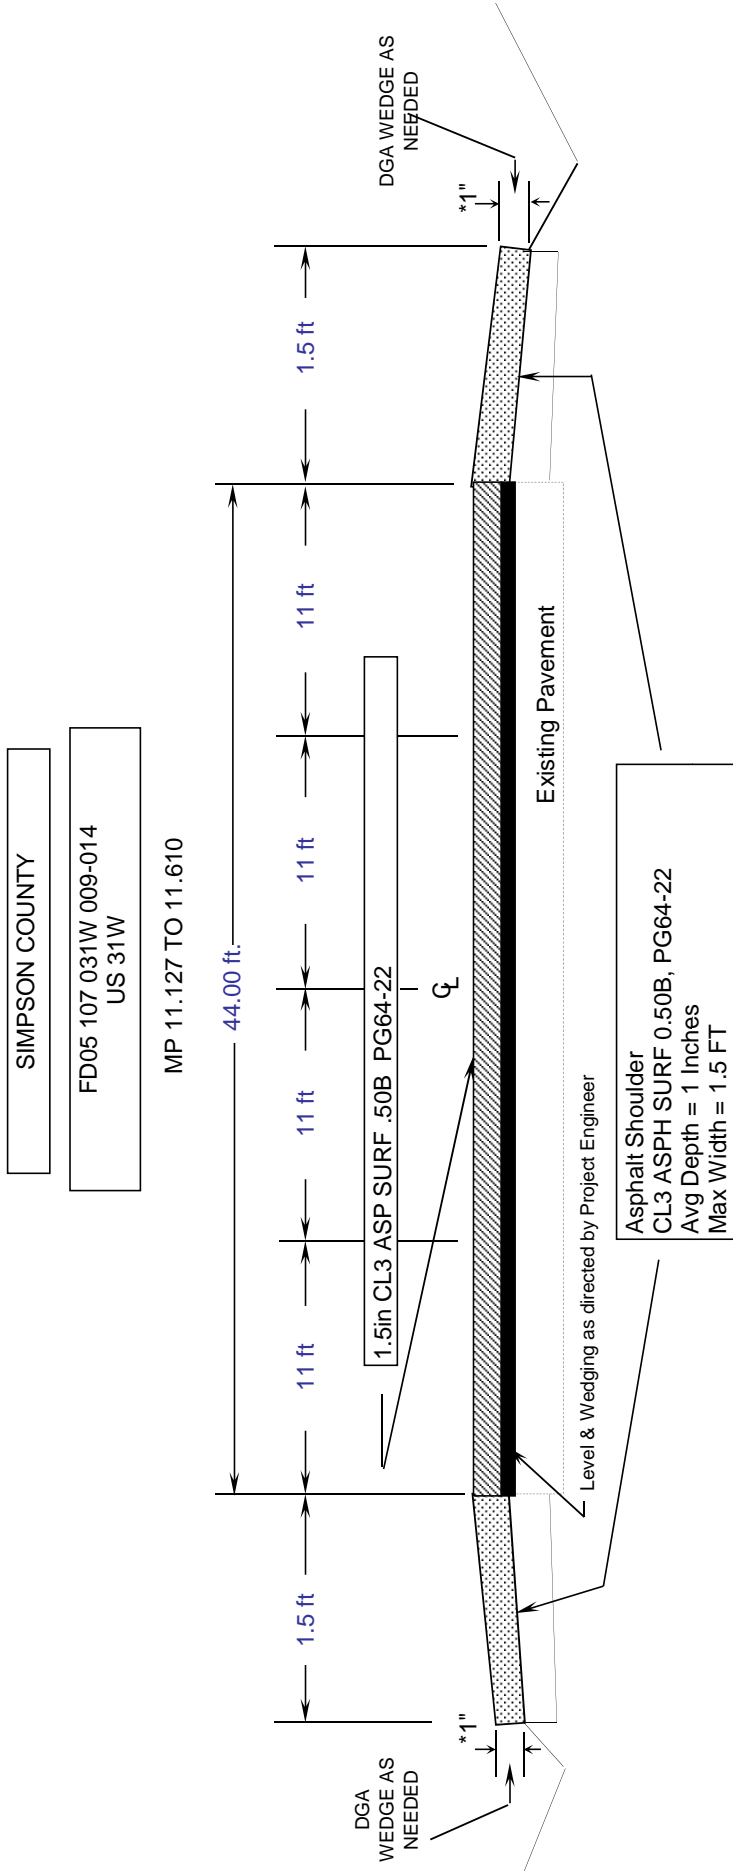

***1" Max Drop Off Where Site Conditions Permit**

PROPOSAL BID ITEMS

Report Date 4/16/13

Section: 0001 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRICE	FP	AMOUNT
0010	00001		DGA BASE	1,737.00	TON		\$	
0020	00077		AGGREGATE FOR MAILBOX TURNOUTS	250.00	TON		\$	
0030	00190		LEVELING & WEDGING PG64-22	1,164.00	TON		\$	
0050	00301		CL2 ASPH SURF 0.38D PG64-22(REVISED: 4-16-13)	690.00	TON		\$	
0060	00324		CL3 ASPH SURF 0.50B PG64-22(REVISED: 4-16-13)	6,825.00	TON		\$	
0070	02562		TEMPORARY SIGNS	580.00	SQFT		\$	
0080	02585		EDGE KEY	85.00	LF		\$	
0090	02650		MAINTAIN & CONTROL TRAFFIC(US 31W)	1.00	LS		\$	
0100	02650		MAINTAIN & CONTROL TRAFFIC(KY 383)	1.00	LS		\$	
0110	03240		BASE FAILURE REPAIR	125.00	SQYD		\$	
0120	03250		ONE STEP MEMBRANE	45.00	SQYD		\$	
0130	06510		PAVE STRIPING-TEMP PAINT-4 IN	127,000.00	LF		\$	
0140	06514		PAVE STRIPING-PERM PAINT-4 IN	131,500.00	LF		\$	
0150	06568		PAVE MARKING-THERMO STOP BAR-24IN	167.00	LF		\$	
0160	06570		PAVE MARKING-PAINT CROSS-HATCH	15,460.00	SQFT		\$	
0170	06574		PAVE MARKING-THERMO CURV ARROW	29.00	EACH		\$	
0180	06576		PAVE MARKING-THERMO ONLY	5.00	EACH		\$	
0190	06592		PAVEMENT MARKER TYPE V-B W/R	36.00	EACH		\$	
0200	06593		PAVEMENT MARKER TYPE V-B Y/R	286.00	EACH		\$	
0210	06600		REMOVE PAVEMENT MARKER TYPE V	943.00	EACH		\$	
0220	10020NS		FUEL ADJUSTMENT	13,634.00	DOLL	\$1.00	\$	\$13,634.00
0230	10030NS		ASPHALT ADJUSTMENT	33,931.00	DOLL	\$1.00	\$	\$33,931.00
0240	22950NN		PAVE MARKING-THERMO STOP	2.00	EACH		\$	

Section: 0002 - DEMOBILIZATION

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRICE	FP	AMOUNT
0250	02569		DEMOBILIZATION	1.00	LS		\$	