


~ NOTES ~


BID ITEM AND UNIT TO BID

DELINEATOR FOR BARRIER WALL - M/W	EACH
DELINEATOR FOR BARRIER WALL - M/Y	EACH
DELINEATOR FOR BARRIER WALL - B/Y	EACH
DELINEATOR FOR BARRIER WALL - B/W	EACH


1. BARRIER WALL DELINEATORS SHALL BE REQUIRED ON ALL BARRIER WALLS.
2. DELINEATORS SHALL BE MEASURED AND PAID FOR AT THE CONTRACT UNIT PRICE EACH, AND SHALL INCLUDE ALL MATERIALS AND LABOR NECESSARY FOR ONE COMPLETE INSTALLATION.
3. THE COLOR OF DELINEATORS SHALL MATCH THE COLOR OF THE EDGELINE THAT THEY SUPPLEMENT. IN GENERAL, DELINEATORS ON BARRIER WALL ALONG THE LEFT SIDE OF DRIVING LANES SHALL BE YELLOW, AND DELINEATORS ON BARRIER WALL ALONG THE RIGHT SIDE OF DRIVING LANES SHALL BE WHITE. DELINEATORS IN BOTH DIRECTIONS ON A TWO-LANE, TWO-WAY ROADWAY SHALL BE BI-DIRECTIONAL WHITE.
4. TYPES OF DELINEATORS PERMITTED SHALL BE FROM THE LIST OF APPROVED MATERIALS. THE DELINEATOR SHAPE AND DIMENSIONS ARE FOR ILLUSTRATION PURPOSES ONLY.
5. THE DELINEATOR UNIT SHALL HAVE THE REFLECTIVE SURFACE INSTALLED FACING TRAFFIC.
6. DELINEATORS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMENDATION.
7. DELINEATORS SHALL BE ATTACHED TO CONCRETE MEDIAN BARRIER WITH AN APPROVED ADHESIVE.
8. DELINEATOR SHEETING SHALL BE TYPE IX, YELLOW OR WHITE.
9. DELINEATORS SHOULD BE MOUNTED AT A HEIGHT OF APPROXIMATELY 4' ABOVE PAVEMENT. WHEN CONCRETE BARRIERS EXTEND ACROSS BRIDGE STRUCTURES IN LIEU OF STEEL BEAM GUARDRAIL, DELINEATORS SHALL BE INSTALLED AT THE SAME VERTICAL ALIGNMENT AS ON THE GUARDRAIL.
10. FOR BARRIER WALLS 50" OR LESS IN HEIGHT, DELINEATORS MAY BE INSTALLED ON TOP OF THE BARRIER WALL. FOR MEDIAN BARRIER WALLS 50" OR LESS IN HEIGHT THAT SEPARATE TWO-WAY TRAFFIC, BI-DIRECTIONAL YELLOW DELINEATORS MAY BE INSTALLED ON THE TOP OF THE BARRIER WALL IN LIEU OF SIDE-MOUNTED MONO-DIRECTIONAL YELLOW DELINEATORS.




FRONT ELEVATION



SIDE ELEVATION



NORMAL (SOLID) WALL SECTION

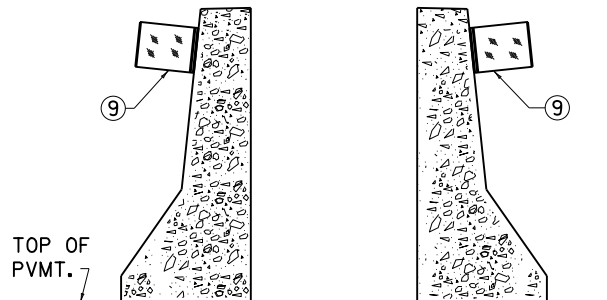

(SEPARATE SEGMENT) WALL SECTION

APPROXIMATE DELINEATOR SPACING

TANGENT	100'
CURVE	50'

SPACING SHOULD BE ADJUSTED IN CURVES SO THAT SEVERAL DELINEATORS ARE ALWAYS SIMULTANEOUSLY VISIBLE TO THE ROAD USER.

**KENTUCKY
DEPARTMENT OF HIGHWAYS**

**DELINEATORS FOR
CONCRETE BARRIERS**

STANDARD DRAWING NO. RBM-020-09

SUBMITTED	<i>William P. Gullett</i>	12-01-15
	DIRECTOR, DIVISION OF DESIGN	DATE
APPROVED	<i>[Signature]</i>	12-01-15
	STATE HIGHWAY ENGINEER	DATE