CALL NO. 408

CONTRACT ID. 083244

OHIO COUNTY

FED/STATE PROJECT NUMBER 092GR08R077

LETTING DATE: October 31, 2008

Sealed Bids will be received in the Division of Construction Procurement and/or the Auditorium located on the 1st floor of the Transportation Cabinet Office Building until 10:00 AM EASTERN DAYLIGHT TIME October 31, 2008. Bids will be publicly opened and read at 10:00 AM EASTERN DAYLIGHT TIME.

REQUIRED BID PROPOSAL GUARANTY: Not less than 5% of the total bid.

(Check guaranty submitted: Cashier's Check ☐ Certified Check ☐ Bid Bond ☐)

BID BONDS WHEN SUBMITTED WILL BE RETAINED WITH THE PROPOSAL

DBE General Plan Included ☐

BID ☐ PROPOSAL ISSUED TO: _____

SPECIMEN ☐ _____

Address City State Zip

TABLE OF CONTENTS

PART I SCOPE OF WORK
- PROJECT(S), COMPLETION DATE(S), & LIQUIDATED DAMAGES
- CONTRACT NOTES
- ASPHALT MIXTURE
- INCIDENTAL SURFACING
- FUEL AND ASPHALT PAY ADJUSTMENT
- OPTION B
- SPECIAL NOTE(S) APPLICABLE TO PROJECT
- ASPHALT MILLING AND TEXTURING
- TYPICAL SECTION DIMENSIONS
- TRENCHING
- TRAFFIC CONTROL PLAN
- SKETCH MAP(S)
- MATERIAL SUMMARY
- TYPICAL SECTION(S)

PART II SPECIFICATIONS AND STANDARD DRAWINGS
- SPECIFICATIONS REFERENCE
- SUPPLEMENTAL SPECIFICATIONS
- 2008 STANDARD DRAWINGS THAT APPLY

PART III EMPLOYMENT, WAGE AND RECORD REQUIREMENTS
- LABOR AND WAGE REQUIREMENTS
- EXECUTIVE BRANCH CODE OF ETHICS
- KENTUCKY EQUAL EMPLOYMENT OPPORTUNITY ACT OF 1978
- PROJECT WAGE RATES

PART IV INSURANCE

PART V BID ITEMS

PART I

SCOPE OF WORK

CONTRACT ID - 083244 ADMINISTRATIVE DISTRICT - 02

PROJECT(S) IDENTIFICATION AND DESCRIPTION:

COUNTY - OHIO
092GR08R077 VARIOUS ROUTES IN OHIO COUNTY

COUNTY - OHIO PES - 02092006908R1
CB06 092 0069 002-007
KRONOS ROAD (KY 69) FROM D. FLENER ROAD (MP 2.367) EXTENDING EASTERLY TO KY 85 (MP 6.719), A DISTANCE OF 4.35 MILES. ASPHALT RESURFACING.
GEOGRAPHIC COORDINATES LATITUDE 37^24'30" LONGITUDE 87^02'30"
AVERAGE DAILY TRAFFIC - 290 AVERAGE MAINLINE WIDTH - 23.5 FEET

COUNTY - OHIO PES - 0209201100801
CB06 092 0110 000-001
HWY 110 (KY 110) FROM KY 54 (MP 0.000) EXTENDING EASTERLY TO THE BRECKINRIDGE COUNTY LINE (MP 0.980), A DISTANCE OF 0.98 MILES. ASPHALT RESURFACING.
GEOGRAPHIC COORDINATES LATITUDE 37^35'02" LONGITUDE 86^37'30"
AVERAGE DAILY TRAFFIC - 320 AVERAGE MAINLINE WIDTH - 19.0 FEET

COUNTY - OHIO PES - 02092036908R1
CB06 092 0369 011-014
ROCHESTER ROAD (KY 369) FROM BUTTERMILK LANE (MP 11.353) EXTENDING NORTHERLY TO US 231 (MP 13.040), A DISTANCE OF 1.69 MILES. ASPHALT RESURFACING.
GEOGRAPHIC COORDINATES LATITUDE 37^23'00" LONGITUDE 86^57'30"
AVERAGE DAILY TRAFFIC - 800 AVERAGE MAINLINE WIDTH - 19.0 FEET

COUNTY - OHIO PES - 02092076408R1
CB06 092 0764 000-004
PLEASANT RIDGE ROAD (KY 764) FROM THE DAVIESS COUNTY LINE (MP 0.000) EXTENDING EASTERLY TO KY 762 (MP 3.412), A DISTANCE OF 3.41 MILES. ASPHALT RESURFACING.
GEOGRAPHIC COORDINATES LATITUDE 37^35'30" LONGITUDE 86^57'30"
AVERAGE DAILY TRAFFIC - 1010 AVERAGE MAINLINE WIDTH - 20.0 FEET

COUNTY - OHIO PES - 02092154408R1
CB06 092 1544 002-005
ROSINE-CEDAR GROVE ROAD (KY 1544) FROM HALLS CREEK ROAD (MP 2.213) EXTENDING NORTH TO KY 1164 (MP 4.588), A DISTANCE OF 2.38 MILES. ASPHALT RESURFACING.
GEOGRAPHIC COORDINATES LATITUDE 37^29'30" LONGITUDE 86^44'20"
AVERAGE DAILY TRAFFIC - 490 AVERAGE MAINLINE WIDTH - 19.0 FEET

COMPLETION DATE(S):
COMPLETION DATE - June 30, 2009
APPLIES TO ENTIRE CONTRACT

CONTRACT NOTES

PROPOSAL ADDENDA

All addenda to this proposal must be incorporated into the proposal when the bid is submitted to the Kentucky Department of Highways. Failure to use the correct and most recent bid sheet(s) may result in the bid being rejected.

BID SUBMITTAL

Bidder must use the Department's Highway Bid Program available on the Internet web site of the Department of Highways, Division of Construction Procurement. (www.transportation.ky.gov/contract)

The Bidder must download the bid items created from the web site to prepare a bid proposal for submission to the Department. The bidder must insert the completed bid item sheets printed from the Program into the bidder's proposal and submit with the disk created by said program.

JOINT VENTURE BIDDING

Joint Venture bidding is permissible. However, both companies MUST purchase a bidding proposal. Either proposal may be submitted but must contain the company names and signatures of both parties where required. A joint bid bond of 5% may be submitted for both companies or each company may submit a separate bond of 5%.

UNDERGROUND FACILITY DAMAGE PROTECTION

The contractor is advised that the Underground Facility Damage Protection Act of 1994, became law January 1, 1995. It is the contractor's responsibility to determine the impact of the act regarding this project, and take all steps necessary to be in compliance with the provision of the act.

ASPHALT MIXTURE

The rate of application for all asphalt mixtures shall be estimated at 110 lbs/sy per inch of depth, unless otherwise noted.

INCIDENTAL SURFACING

The quantities established in the proposal include estimated quantities required for resurfacing or surfacing mailbox turnouts, farm field entrances, residential and commercial entrances, and road and street approaches. These items are to be paved to the limits as shown on Standard Drawing RPM 110 or to the limits as directed by the Engineer. In the event signal detectors are present in the intersecting streets or roads, the paving of the crossroads shall be to the right of way limit or back of the signal detector, whichever is the farthest back of the mainline. These areas are to be surfaced or resurfaced as directed by the Engineer and no direct payment will be allowed for placing and compacting.

FUEL AND ASPHALT PAY ADJUSTMENT

These contract items Lot Pay Adjustment, Asphalt Adjustment and Fuel Adjustment, are for possible future payments. Additional monies may need to be setup with an additional change order if existing contract amount is insufficient to pay all items on the contract. Unit price is $1.00. Quantity will be actual adjustment after work is completed.

OPTION B

The Contractor is advised that the compaction of asphalt mixtures furnished to this project will be accepted by OPTION B in accordance with Section 402 and Section 403 of the current *Standard Specification.*

Asphalt Milling on KY 764

Ohio County
CB06-092-764-000-004
Mile Point 1.356-1.456

Due to the Natcher Parkway over pass bridges, B 67 & B 67P a three hundred length section of KY 764 should be milled at a depth of 1 inch. On either end of the three hundred feet of 1 inch milling there should be a 100 ft taper. Bringing the total milling distance to 500 feet.

KY 764

Road width at section needing milling, Width = 21ft

SPECIAL NOTE FOR
ASPHALT MILLING AND TEXTURING

Begin paving operations within **two weeks** of commencement of the milling operation. Continue paving operations continuously until completed. If paving operations are not begun within this time period, liquidated damages will be assessed at the rate prescribed by Section 108.09 of the current Standard Specifications until such time as paving operations are begun.

Contrary to Section 408 of the current Standard Specifications, the material obtained from the milling operations shall become the property of the Department. Deliver this material to the nearest State Maintenance facility in the County where the project is located. The Contractor, at his option, may elect to keep this material at an agreed cost of $17.50 per ton. The cost to the Contractor for this material will be deducted from money due on the Contract.

1-3510 milling2weekcontractoroption
12/3/2007

SPECIAL NOTE FOR TYPICAL SECTION DIMENSIONS

The dimensions shown on the typical sections for pavement and shoulder widths and thickness' are nominal or typical dimensions. The actual dimensions to be constructed may be varied to fit existing conditions as directed or approved by the Engineer. It is not intended that existing pavement or shoulders be widened unless specified elsewhere in the Proposal.

typical section
05/09/2003

SPECIAL NOTE FOR TRENCHING

Re-shape and compact excavated material from the trench on the outside edge of the paved shoulder as shown on the typical section. Waste unsuitable or excess material not needed to construct the wedge off the right-of-way at sites obtained by the contractor at no additional cost to the Department.

The Department will measure "Trenching" in linear feet at the pavement/shoulder edge. Payment at the contract unit price per linear feet shall be full compensation for all labor, materials, equipment and incidentals for excavating the shoulder trench and reuse and/or disposal of the material.

1-3910 trenchingshouldercontractorreshape
09/18/03

TRAFFIC CONTROL PLAN

TRAFFIC CONTROL GENERAL

Except as provided herein, traffic shall be maintained in accordance with the current editions of the Standard Specifications and Standard Drawings. Except for the roadway and traffic control bid items listed, all items of work necessary to maintain and control traffic will be paid at the lump sum bid price to "Maintain and Control Traffic".

Contrary to Section 106.01, traffic control devices used on this project may be new, or used in like new condition, at the beginning of the work and maintained in like new condition until completion of the work.

PROJECT PHASING & CONSTRUCTION PROCEDURES

At the discretion of the Engineer, days and hours may be specified when lane closures will not be allowed.

The Contractor may maintain alternating one way traffic during construction if the surface width is 16 feet or greater. The clear lane width shall be a minimum of 8 feet. If traffic should be stopped due to construction operations, and a school bus on an official run arrives on the scene, the Contractor shall make provisions for the passage of the bus as quickly as possible.

LANE CLOSURES

Lane closures shall not be left in place during non-working hours.

PAVEMENT EDGE DROP-OFFS

A pavement edge between opposing directions of traffic or lanes that traffic is expected to cross in a lane change situation shall not have an elevation difference greater than 1½". Warning signs (MUTCD W8-11 or W8-9A) shall be placed in advance of and at 1500 feet intervals throughout the drop-off area. Dual posting on both sides of the traveled way shall be required. All transverse transitions between resurfaced and unresurfaced areas which traffic may cross shall be wedged with asphalt mixture for leveling and wedging. The wedges shall be removed prior to placement of the final surface course.

Pavement edges that traffic is not expected to cross, except accidentally, shall be treated as follows:

- Less than 2" - No protection required.
- 2" to 4" - Place plastic drums, vertical panels, or barricades every 50 feet. Cones may be used in place of plastic drums, panels, and barricades during daylight working hours. Wedge with asphalt mixture for leveling and wedging with a 1:1 or flatter slope in daylight hours, or 3:1 or flatter slope during nighttime hours, when work is not active in the drop-off area.

DEPARTMENT OF HIGHWAYS
MAP OF
OHIO COUNTY
SHOWING
STATE MAINTAINED SYSTEM
PRIORITY NETWORK FOR
SNOW AND ICE REMOVAL
WINTER 2007-2008

CB06-092-764-000-004

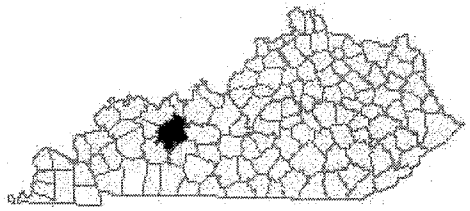

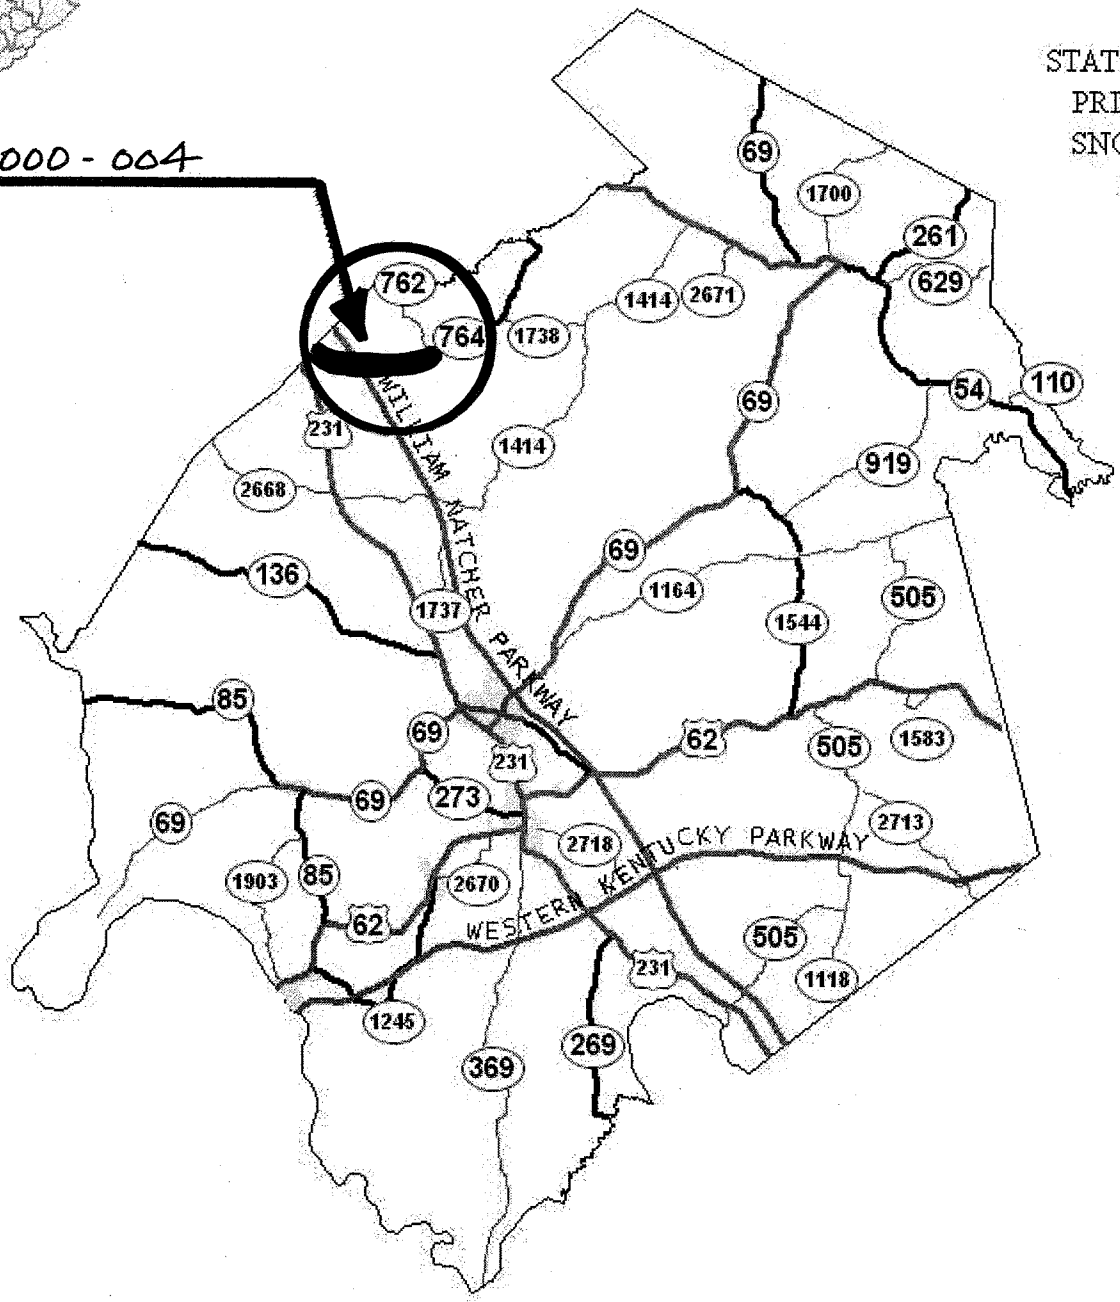

LEGEND
PRIORITY A
PRIORITY B
PRIORITY C



DEPARTMENT OF HIGHWAYS
MAP OF
OHIO COUNTY
SHOWING
STATE MAINTAINED SYSTEM
PRIORITY NETWORK FOR
SNOW AND ICE REMOVAL
WINTER 2007-2008

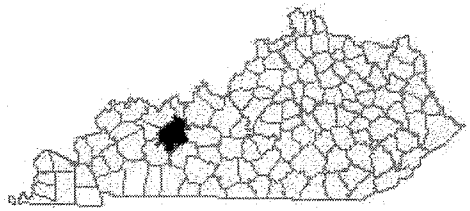

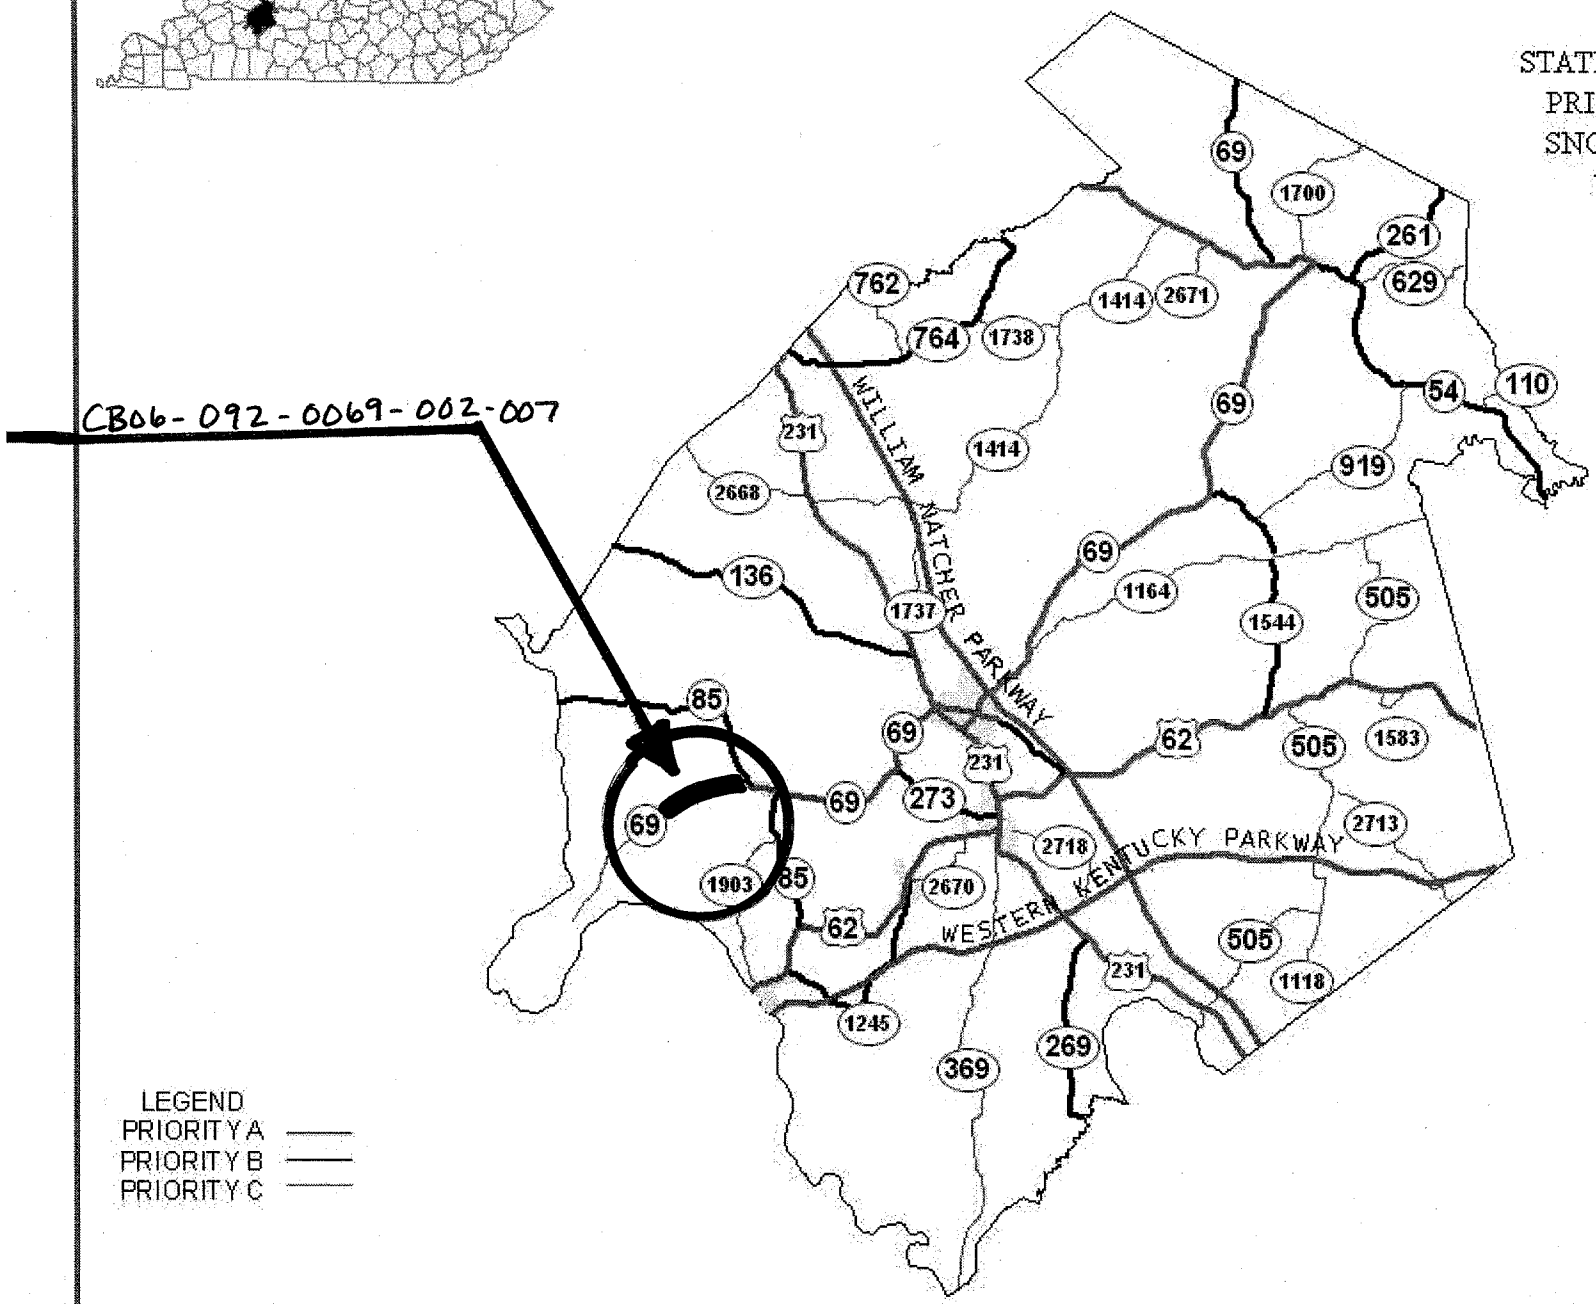

LEGEND
PRIORITY A
PRIORITY B
PRIORITY C

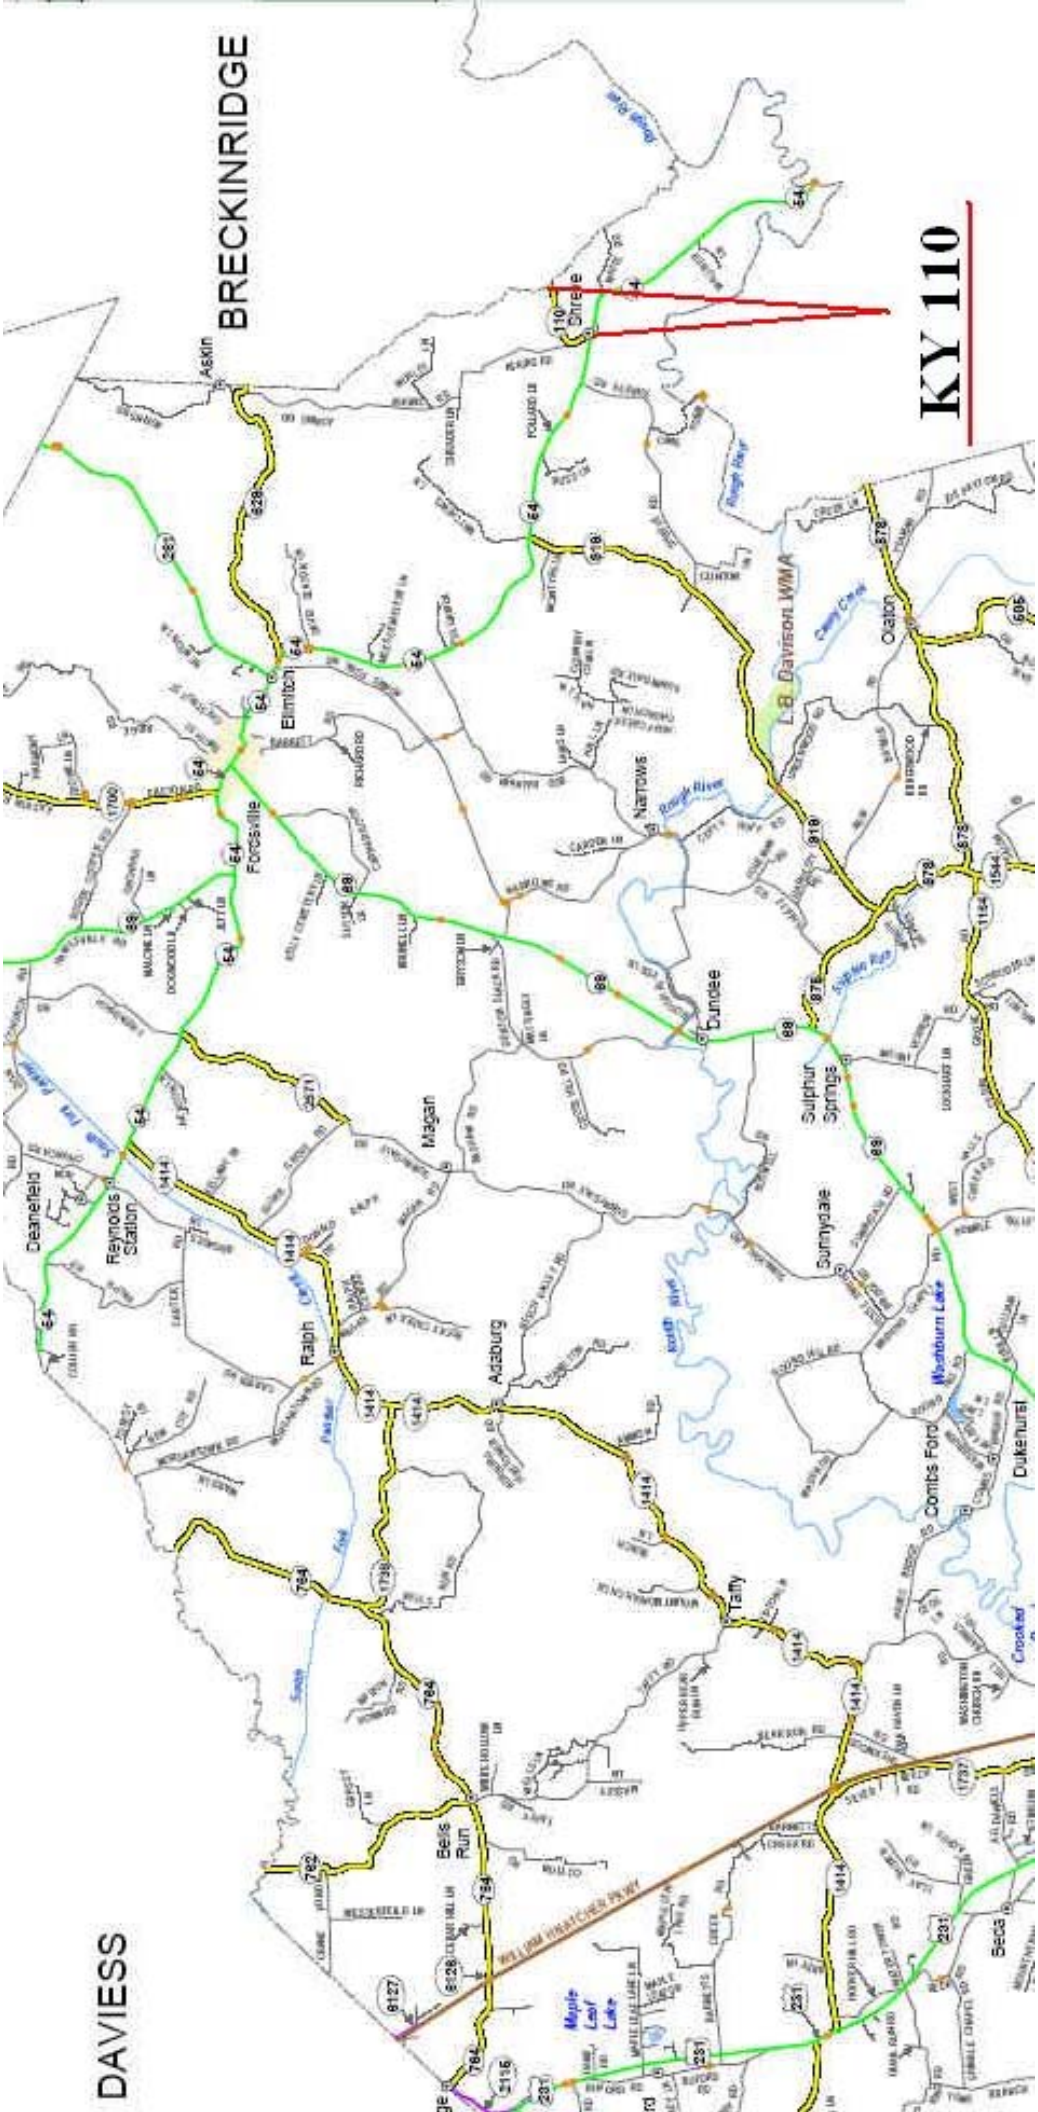
BRECKINRIDGE
KY 110
DAVIESS
Askin
Shreve
Elmton
Fordsville
Narrows
L.B. Davison WMA
Oaton
Dundee
Sulphur Springs
Magan
Sunnydale
Deanefield
Reynolds Station
Ralph
Adaburg
Washburn Lake
Combs Ford
Dukehurst
Tatty
Beis Run
Maple Leaf Lake
Beis
WILLIAM HEATCHER PKWY

DEPARTMENT OF HIGHWAYS
MAP OF
OHIO COUNTY
SHOWING
STATE MAINTAINED SYSTEM
PRIORITY NETWORK FOR
SNOW AND ICE REMOVAL
WINTER 2007-2008

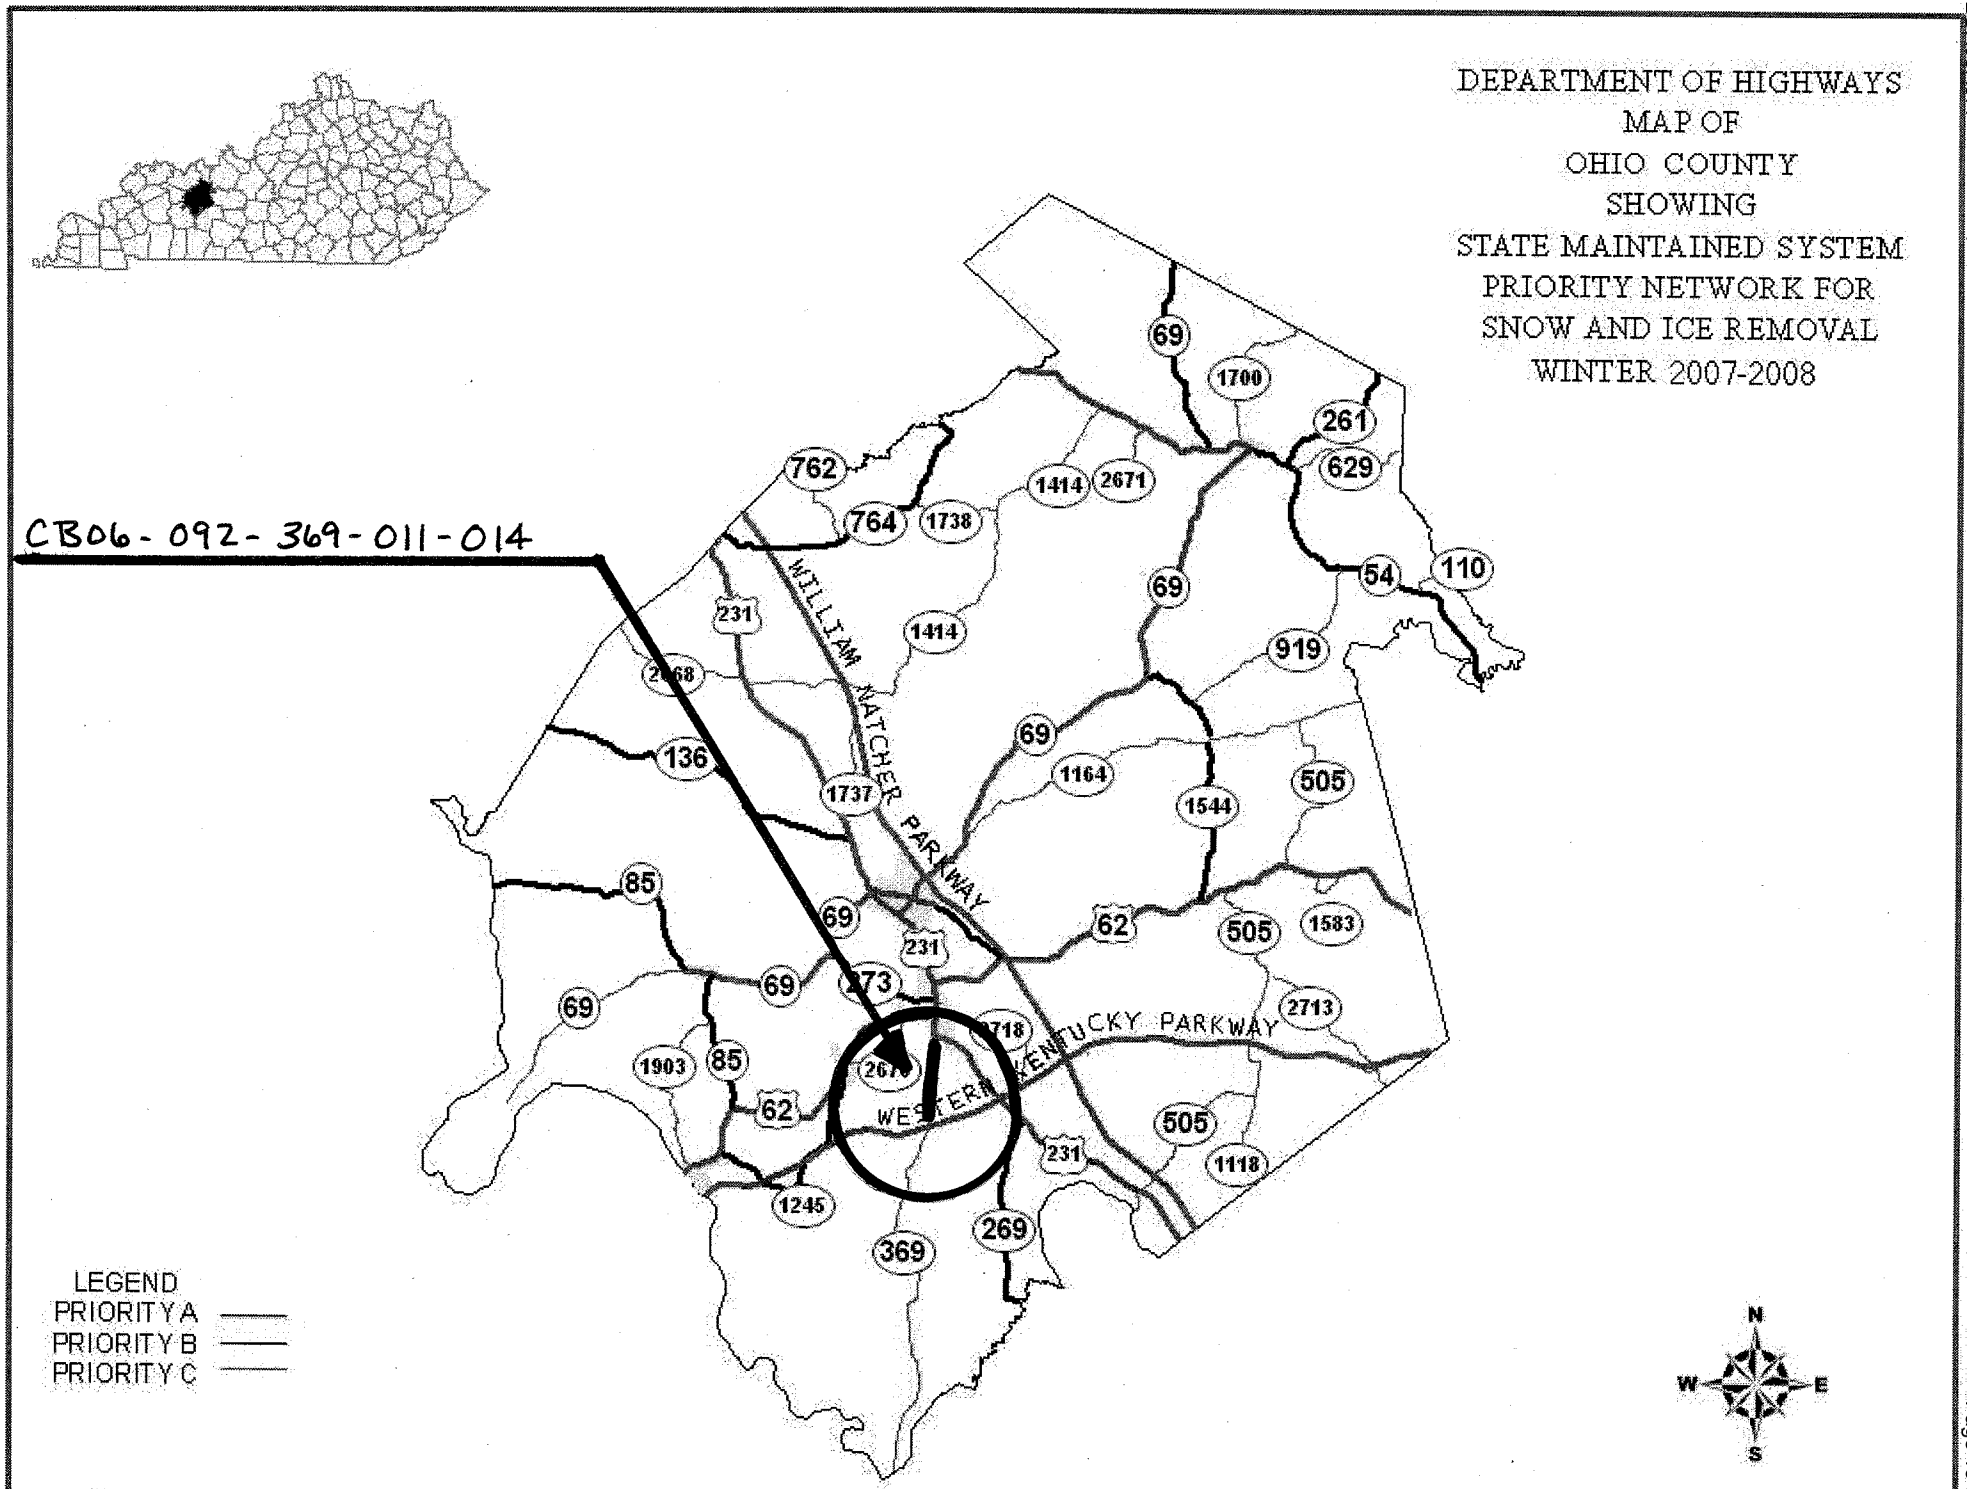

DEPARTMENT OF HIGHWAYS
MAP OF
OHIO COUNTY
SHOWING
STATE MAINTAINED SYSTEM
PRIORITY NETWORK FOR
SNOW AND ICE REMOVAL
WINTER 2007-2008

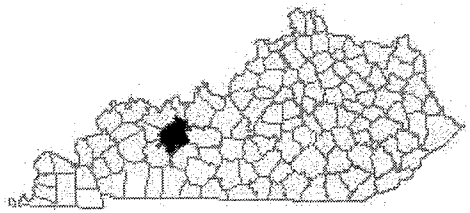

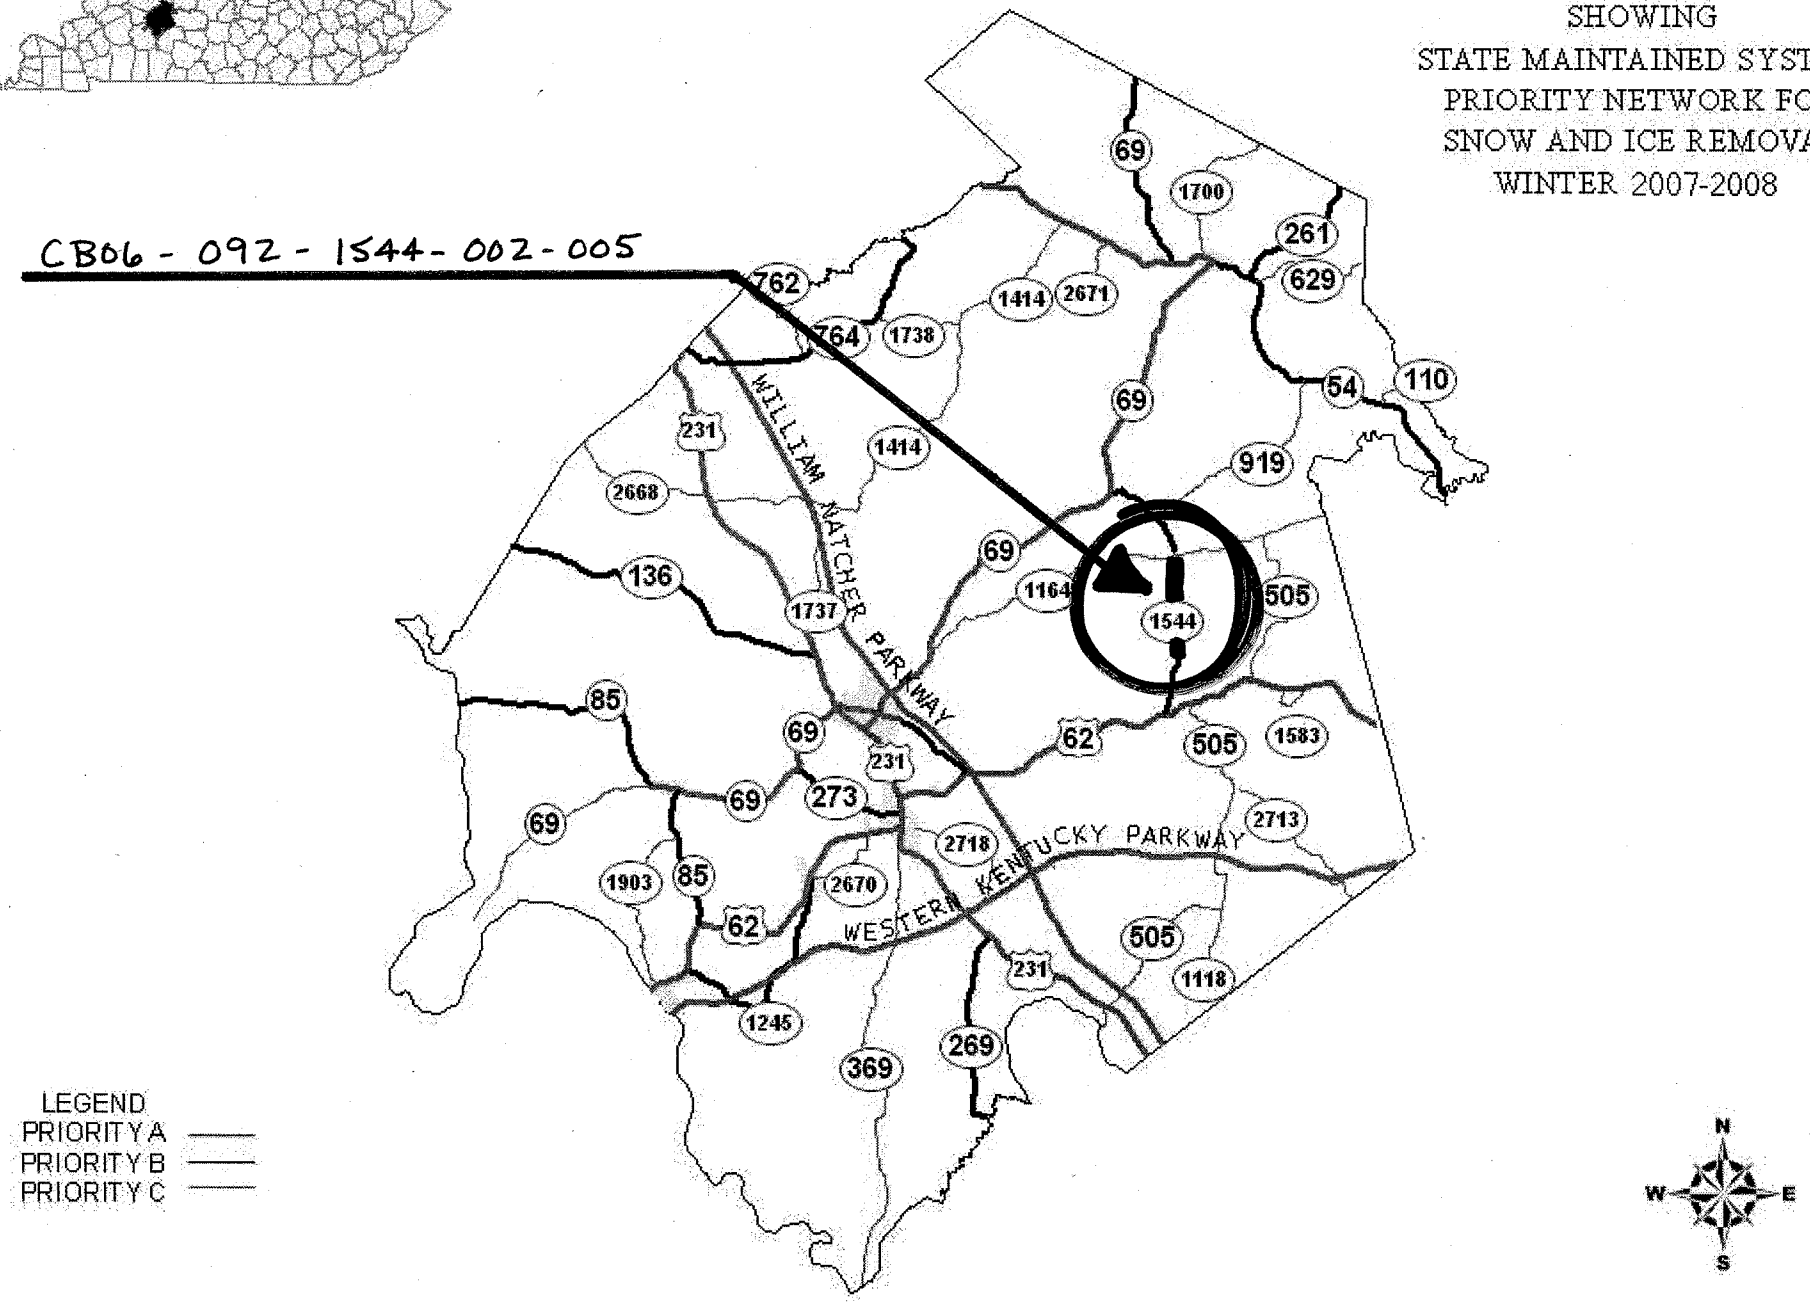

MATERIAL SUMMARY CONTRACT ID: 083244

CB06 092 0069 002-007 PES NO: 02092006908R1
KRONOS ROAD (KY 69) FROM D. FLENER ROAD (MP 2.367) EXTENDING EASTERLY TO KY 85 (MP 6.719), A DISTANCE OF 4.35 MILES.

LINE NO	BID CODE	DESCRIPTION	QUANTITY	UNIT
0010	00190	LEVELING & WEDGING PG64-22	905.00	TON
0020	00301	CL2 ASPH SURF 0.38D PG64-22	3,725.00	TON
0030	02562	SIGNS	250.00	SQFT
0040	02650	MAINTAIN & CONTROL TRAFFIC KY 69	1.00	LS
0050	06510	PAVE STRIPING-TEMP PAINT-4 IN	3,122.00	LF
0060	06514	PAVE STRIPING-PERM PAINT-4 IN	31,220.00	LF
0061	10020NS	FUEL ADJUSTMENT	6,330.00	DOLL
0063	10030NS	ASPHALT ADJUSTMENT	11,154.00	DOLL
0070	02569	DEMOBILIZATION	1.00	LS

CB06 092 0110 000-001 PES NO: 0209201100801
HWY 110 (KY 110) FROM KY 54 (MP 0.000) EXTENDING EASTERLY TO THE BRECKINRIDGE COUNTY LINE (MP 0.980), A DISTANCE OF 0.98 MILES.

LINE NO	BID CODE	DESCRIPTION	QUANTITY	UNIT
0050	00190	LEVELING & WEDGING PG64-22	181.00	TON
0040	00221	CL2 ASPH BASE 0.75D PG64-22	285.00	TON
0030	00301	CL2 ASPH SURF 0.38D PG64-22	760.00	TON
0010	02562	SIGNS	210.00	SQFT
0020	02650	MAINTAIN & CONTROL TRAFFIC KY 110	1.00	LS
0060	06427	TRENCHING	10,350.00	LF
0080	06510	PAVE STRIPING-TEMP PAINT-4 IN	790.00	LF
0070	06514	PAVE STRIPING-PERM PAINT-4 IN	7,895.00	LF
0090	10020NS	FUEL ADJUSTMENT	1,676.00	DOLL
0100	10030NS	ASPHALT ADJUSTMENT	2,954.00	DOLL
0110	02569	DEMOBILIZATION	1.00	LS

CB06 092 0369 011-014 PES NO: 02092036908R1
ROCHESTER ROAD (KY 369) FROM BUTTERMILK LANE (MP 11.353) EXTENDING NORTHERLY TO US 231 (MP 13.040), A DISTANCE OF 1.69 MILES.

LINE NO	BID CODE	DESCRIPTION	QUANTITY	UNIT
0010	00190	LEVELING & WEDGING PG64-22	312.00	TON
0020	00301	CL2 ASPH SURF 0.38D PG64-22	1,304.00	TON
0030	02562	SIGNS	170.00	SQFT
0040	02650	MAINTAIN & CONTROL TRAFFIC KY 369	1.00	LS
0050	02676	MOBILIZATION FOR MILL & TEXT KY 369	1.00	LS
0060	02677	ASPHALT PAVE MILLING & TEXTURING	35.00	TON
0070	06510	PAVE STRIPING-TEMP PAINT-4 IN	592.00	LF
0080	06514	PAVE STRIPING-PERM PAINT-4 IN	5,913.00	LF
0081	10020NS	FUEL ADJUSTMENT	2,209.00	DOLL
0083	10030NS	ASPHALT ADJUSTMENT	3,893.00	DOLL
0090	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY CONTRACT ID: 083244

CB06 092 0764 000-004 PES NO: 02092076408R1
PLEASANT RIDGE ROAD (KY 764) FROM THE DAVIESS COUNTY LINE (MP 0.000) EXTENDING EASTERLY TO KY 762 (MP 3.412), A DISTANCE OF 3.41 MILES.

LINE NO	BID CODE	DESCRIPTION	QUANTITY	UNIT
0010	00001	DGA BASE	460.00	TON
0020	00190	LEVELING & WEDGING PG64-22	655.00	TON
0030	00301	CL2 ASPH SURF 0.38D PG64-22	2,390.00	TON
0040	02562	SIGNS	270.00	SQFT
0050	02650	MAINTAIN & CONTROL TRAFFIC KY 764	1.00	LS
0060	02676	MOBILIZATION FOR MILL & TEXT KY 764	1.00	LS
0070	02677	ASPHALT PAVE MILLING & TEXTURING	33.00	TON
0080	06510	PAVE STRIPING-TEMP PAINT-4 IN	2,835.00	LF
0090	06514	PAVE STRIPING-PERM PAINT-4 IN	28,345.00	LF
0091	10020NS	FUEL ADJUSTMENT	4,163.00	DOLL
0093	10030NS	ASPHALT ADJUSTMENT	7,336.00	DOLL
0100	02569	DEMOBILIZATION	1.00	LS

CB06 092 1544 002-005 PES NO: 02092154408R1
ROSINE-CEDAR GROVE ROAD (KY 1544) FROM HALLS CREEK ROAD (MP 2.213) EXTENDING NORTH TO KY 1164 (MP 4.588), A DISTANCE OF 2.38 MILES.

LINE NO	BID CODE	DESCRIPTION	QUANTITY	UNIT
0010	00001	DGA BASE	320.00	TON
0020	00190	LEVELING & WEDGING PG64-22	439.00	TON
0030	00301	CL2 ASPH SURF 0.38D PG64-22	1,605.00	TON
0040	02562	SIGNS	250.00	SQFT
0050	02650	MAINTAIN & CONTROL TRAFFIC KY 1544	1.00	LS
0060	06510	PAVE STRIPING-TEMP PAINT-4 IN	2,043.00	LF
0070	06514	PAVE STRIPING-PERM PAINT-4 IN	20,430.00	LF
0071	10020NS	FUEL ADJUSTMENT	2,794.00	DOLL
0073	10030NS	ASPHALT ADJUSTMENT	4,924.00	DOLL
0080	02569	DEMOBILIZATION	1.00	LS

TYPICAL SECTION

OHIO COUNTY

CB06-092-0764-000-004

MILE PTS 1.356-1.456

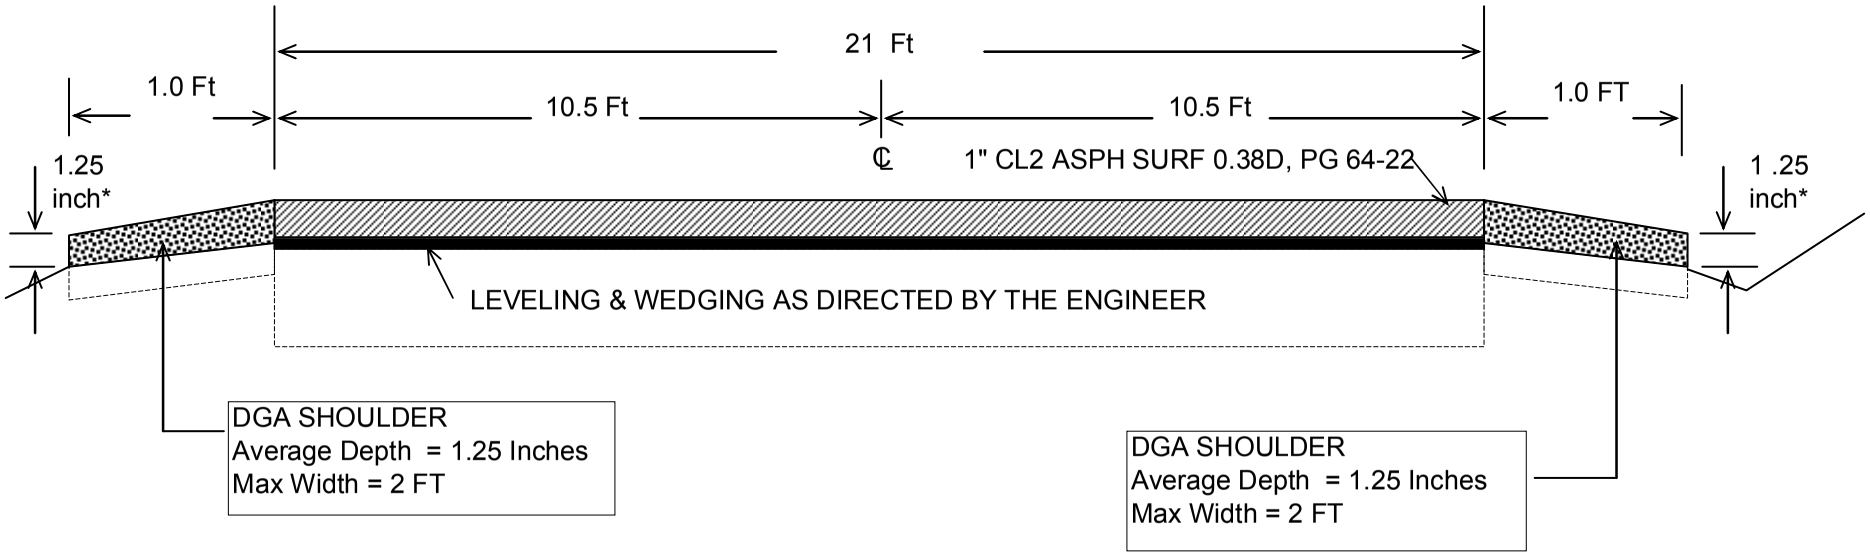

*** Where Existing Site Conditions Permit**

OHIO COUNTY

CB06-092-0069-002-007
TYPICAL SECTION
MILEPOINTS 2.367- 6.719

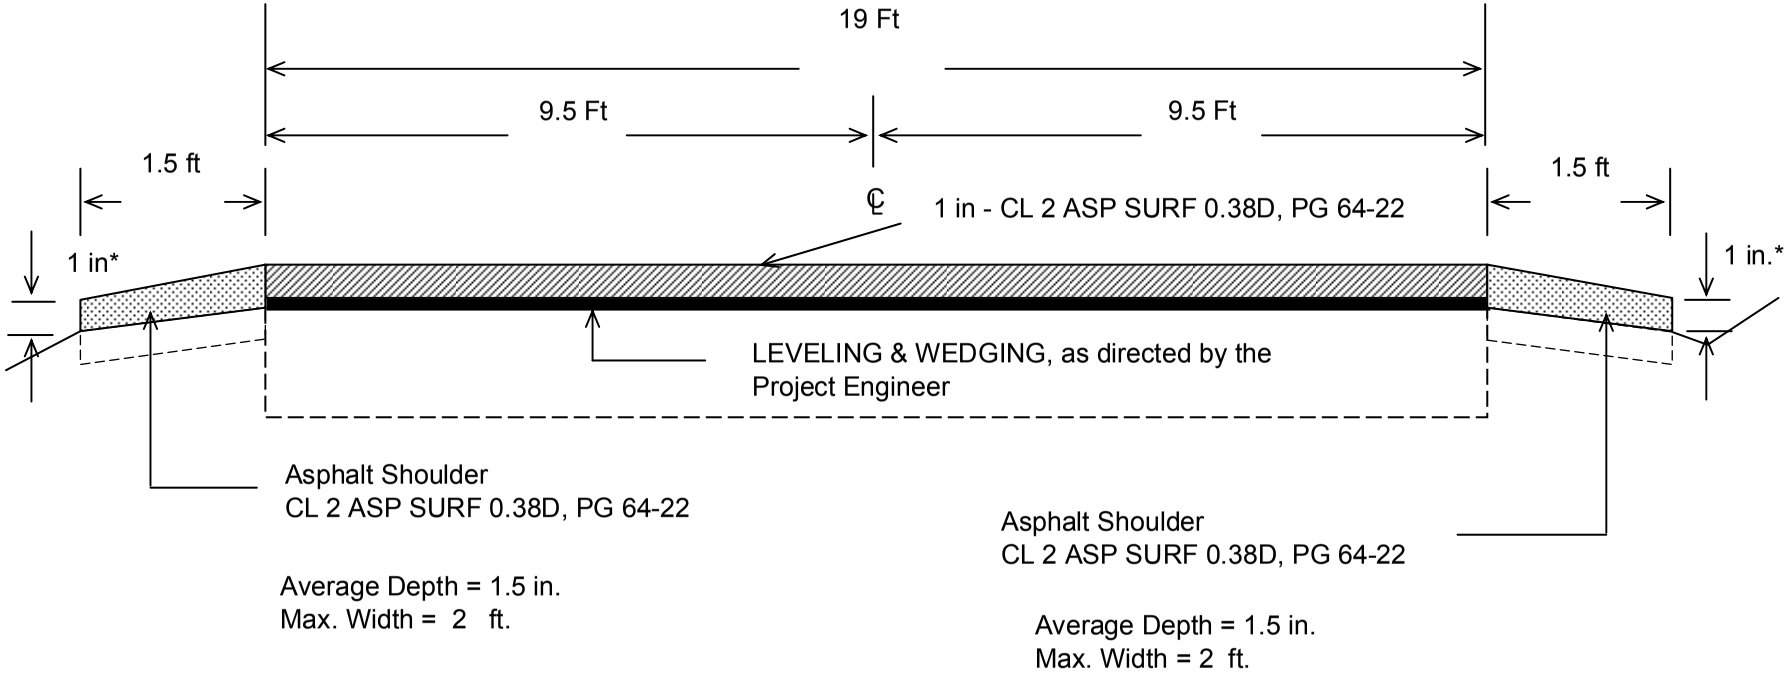

***Where Existing Site Conditions Permit**

TSPAVESURFACEshld
Copy of TS1AsphSurfShldr2lane.xls

OHIO COUNTY
CB06-092-0110-000-001
TYPICAL SECTION
MILEPOINTS 0.00 - 0.980

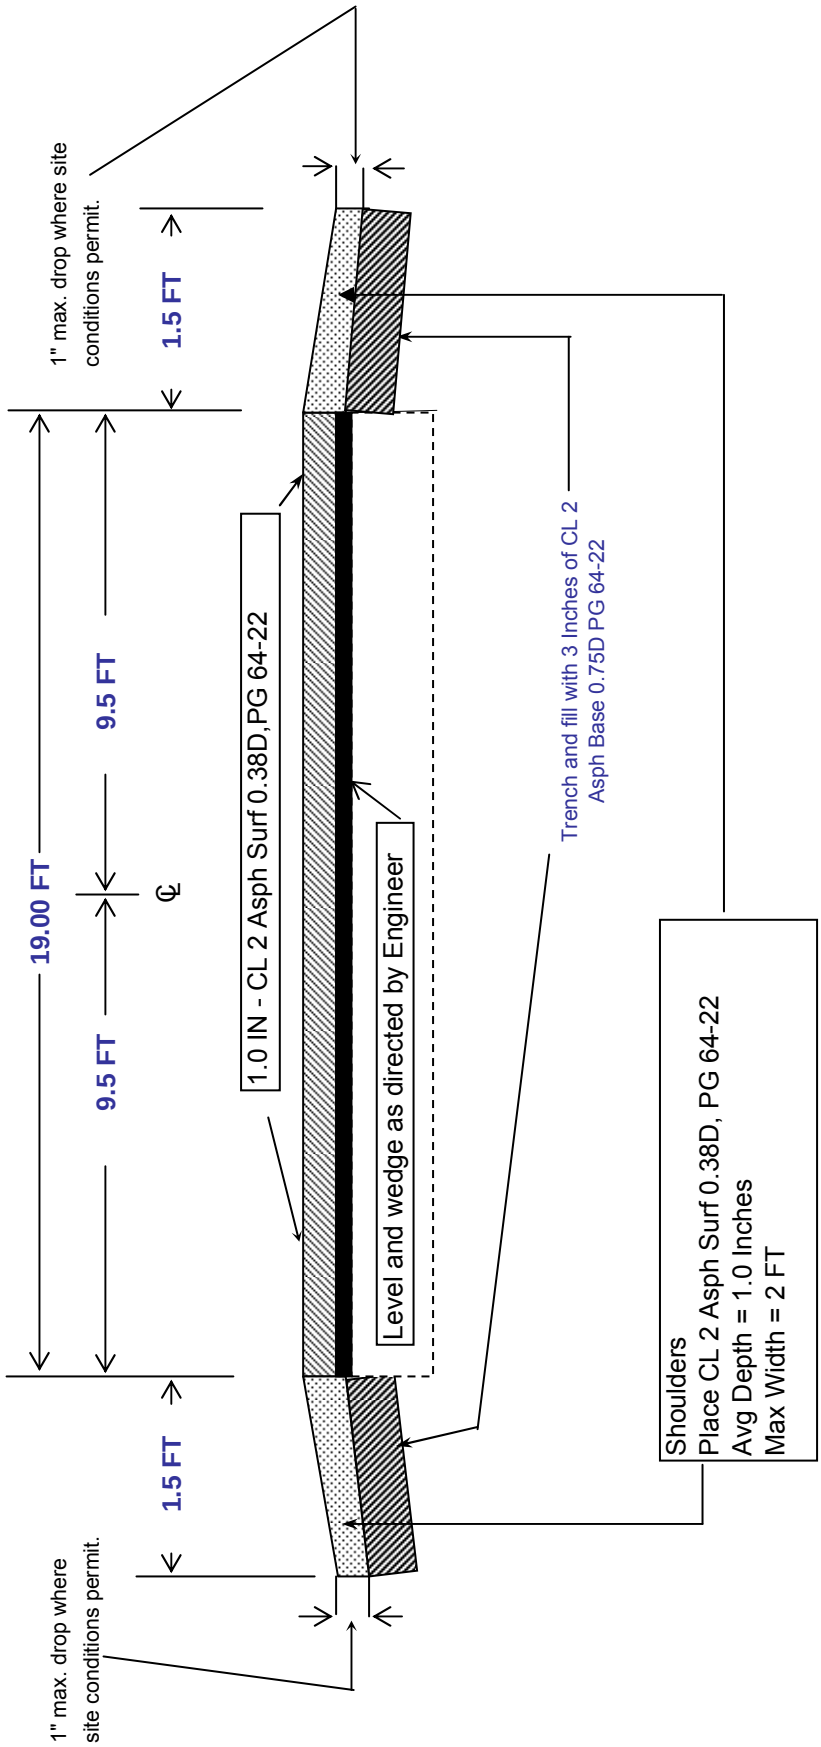

OHIO COUNTY

CB06-092-0369-011-014
TYPICAL SECTION
MILEPOINTS 11.353- 13.040

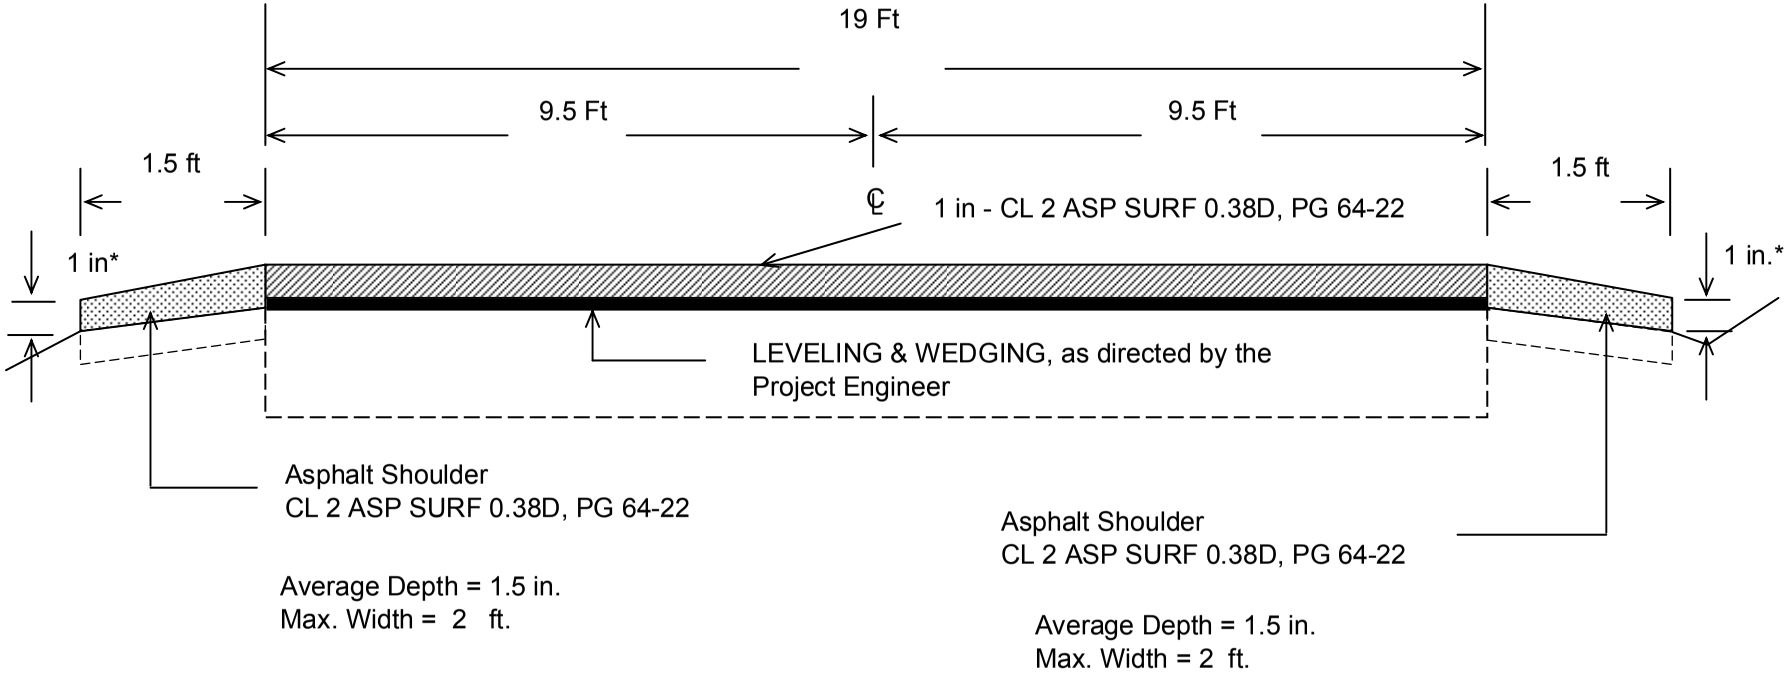

***Where Existing Site Conditions Permit**

TSPAVESURFACEshld
Copy of TS1AsphSurfShldr2lane.xls

TYPICAL SECTION

OHIO COUNTY

CB06-092-0764-000-004

MILE PTS (0.00-1.356)&(1.456-3.412)

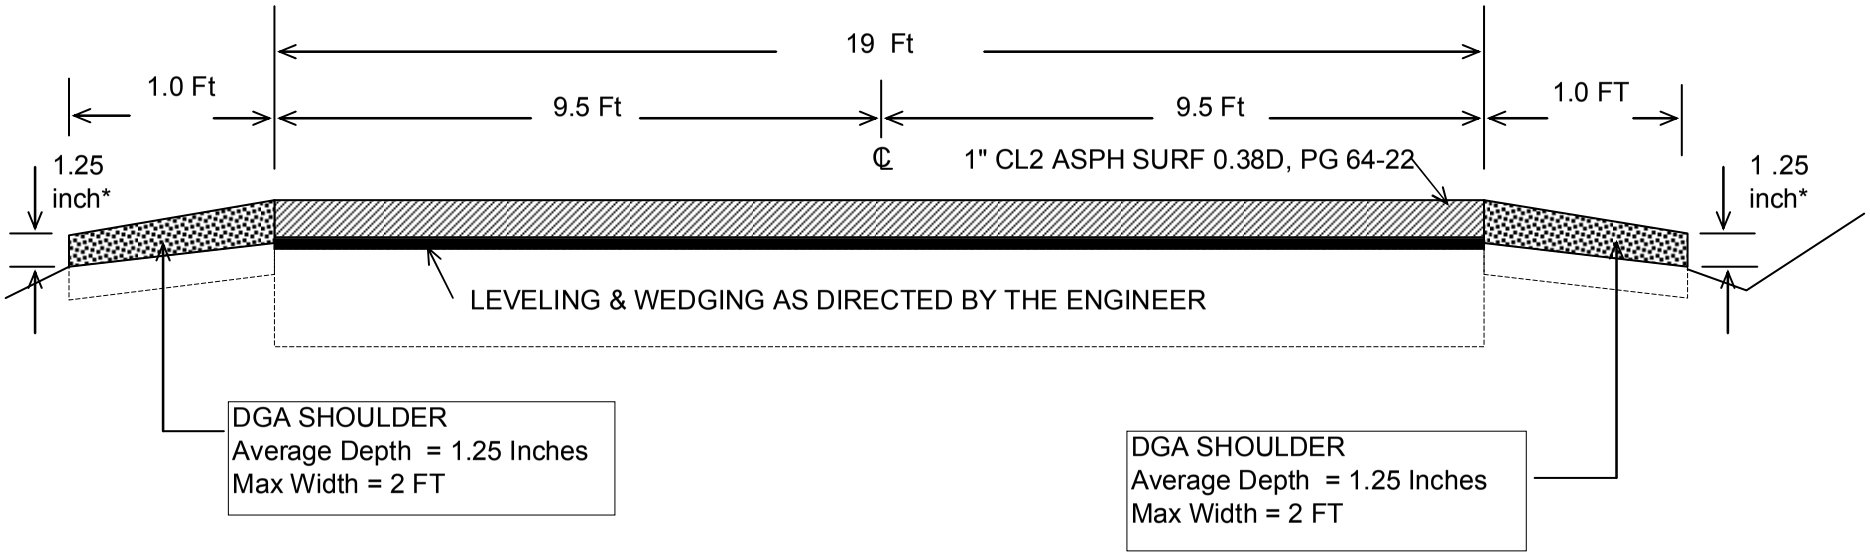

*** Where Existing Site Conditions Permit**

TYPICAL SECTION

OHIO COUNTY

CB06-092-1544-002-005

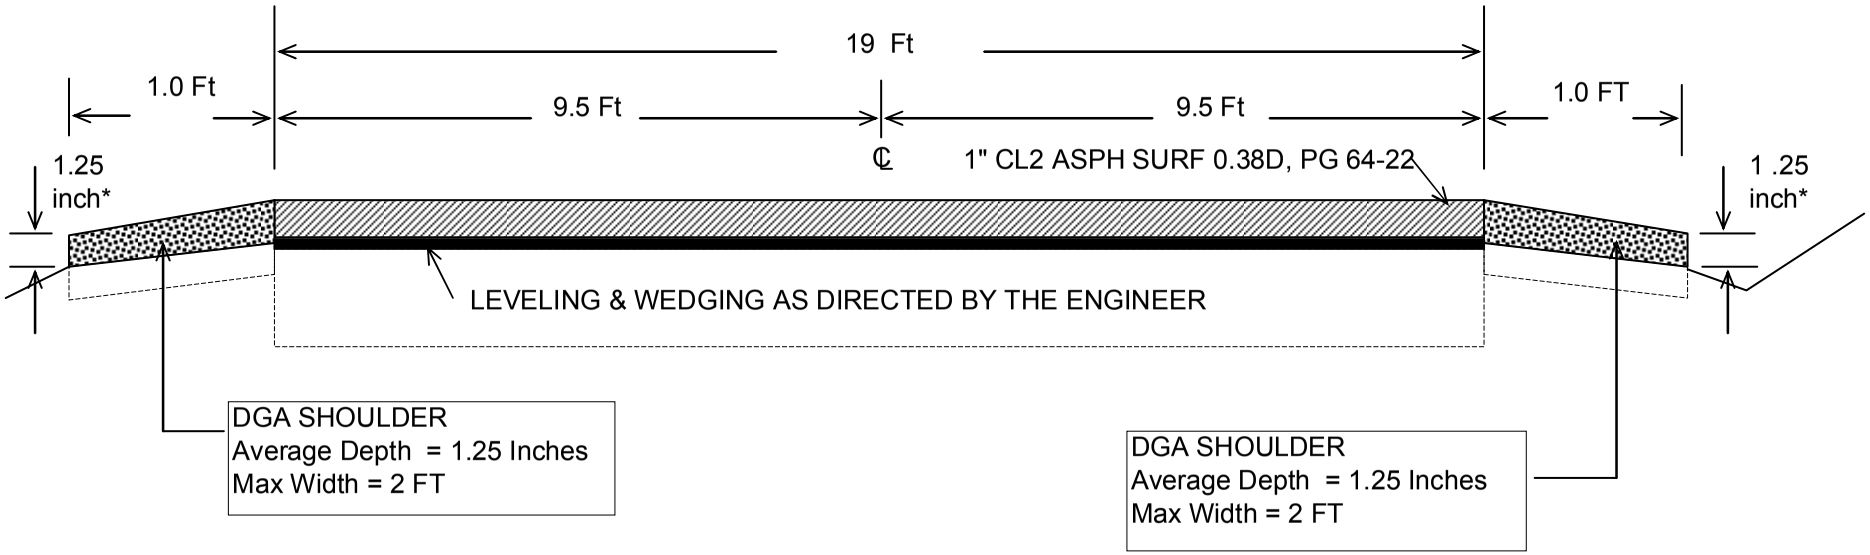

*** Where Existing Site Conditions Permit**

PART II

SPECIFICATIONS AND STANDARD DRAWINGS

SPECIFICATIONS REFERENCE

Any reference in the plans or proposal to the *Standard Specifications for Road and Bridge Construction, Edition of 2004*, and *Standard Drawings, Edition of 2000* are superseded by *Standard Specifications for Road and Bridge Construction, Edition of 2008* and *Standard Drawings, Edition of 2003.*

Special Notes [SN] and Special Provisions [SP] marked with an asterisk * and listed under Part II of the Table of Contents within this proposal can be referenced in the *Standard Specifications for Road and Bridge Construction, Edition of 2008*. Special Notes and Special Provisions not marked with an asterisk will be attached to this proposal.

Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition

(Effective with the October 31, 2008 Letting)

SUBSECTION:	102.07.01 General.
REVISION:	Replace the first sentence with the following: Submit the Bid Proposal on forms furnished on the Department internet website (http://transportation.ky.gov/contract/), including the Bid Packet and disk created from the Expedite Bidding Program.
SUBSECTION:	102.07.02 Computer Bidding.
REVISION:	Replace the first paragraph with the following: Subsequent to ordering a Bid Proposal for a specific project, use the Department's Expedite Bidding Program on the internet website of the Department of Highways, Division of Construction Procurement (http://transportation.ky.gov/contract/). Download the bid file from the Department's website to prepare a Bid Proposal for submission to the Department. Include the completed Bid Packet produced by the Expedite Bidding Program in the Bid Proposal and submit it along with the disk created by said program. Replace the second paragraph with the following: In case of a dispute, the printed Bid Proposal and bid item sheets created by the Expedite Bidding Program take precedence over any bid submittal.
SUBSECTION:	102.08 IRREGULAR BID PROPOSALS.
REVISION:	Replace point four of the first paragraph with the following: 4) fails to submit a disk created from the Expedite Bidding Program. Replace point one of the second paragraph with the following: 1) when the Bid Proposal is on a form other than that furnished by the Department or printed from other than the Expedite Bidding Program, or when the form is altered or any part is detached; or
SUBSECTION:	103.02 AWARD OF CONTRACT.
REVISION:	Replace the first sentence of the third paragraph with the following: The Department will normally award the Contract within 10 working days after the date of receiving Bid Proposals unless the Department deems it best to hold the Bid Proposals of any or all bidders for a period not to exceed 60 calendar days for final disposition of award.
SUBSECTION:	106.10 FIELD WELDER CERTIFICATION REQUIREMENTS.
REVISION:	Insert the following sentence before the first sentence of the first paragraph: All field welding must be performed by a certified welder unless otherwise noted.
SUBSECTION:	112.03.12 Project Traffic Coordinator (PTC).
REVISION:	Add the following at the end of the subsection: After October 1, 2008 the Department will require the PTC to have successfully completed the applicable qualification courses. Personnel that have not successfully completed the applicable courses by that date will not be considered qualified. Prior to October 1, 2008, conform to Subsection 108.06 A) and ensure the designated PTC has sufficient skill and experience to properly perform the task.
SUBSECTION:	213.03.05 Temporary Control Measures.
PART:	F) Temporary Mulch.
REVISION:	Replace the last sentence with the following: Place temporary mulch to an approximate 2-inch loose depth (2 tons per acre) and anchor it into the soil by mechanically crimping it into the soil surface or applying tackifier to provide a protective cover. Regardless of the anchoring method used, ensure the protective cover holds until disturbance is required or permanent controls are in installed.

Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition

(Effective with the October 31, 2008 Letting)

SUBSECTION: 402.05.02 Asphalt Mixtures and Mixtures With RAP.

PART: Lot Pay Adjustment Schedule, Compaction Option A, Base and Binder Mixtures

TABLES: VMA, AV, and LANE DENSITY

REVISION: Replace the VMA, AV, and LANE DENSITY tables with the following:

VMA

Pay Value	Deviation From Minimum
1.00	≤ 0.5 below min.
0.95	0.6-1.0 below min.
0.90	1.1-1.5 below min.
(1)	> 1.5 below min.

AV

Pay Value	Test Result (%)	
	ESAL Class 2	ESAL Class 3 or 4
1.00	3.0-5.0	3.0-5.0
1.00 + 0.1 (AV-3.0)	1.5-2.9	2.0-2.9
1.00 + 0.1 (5.0-AV)	5.1-6.0	5.1-6.0
0.75	6.1-6.5	----
(1)	< 1.5 or > 6.5	< 2.0 or > 6.0

LANE DENSITY

Pay Value	Test Result (%)	
	ESAL Class 2	ESAL Class 3 or 4
1.00	92.0-96.5	92.0-96.5
0.95	91.0-91.9	91.0-91.9
0.90	90.0-90.9 or 96.6-97.0	90.0-90.9 or 96.6-97.0
0.85	97.1-98.5	----
0.75	89.0-89.9	----
(1)	< 89.0 or > 98.5	< 90.0 or > 97.0

Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition

(Effective with the October 31, 2008 Letting)

SUBSECTION: 402.05.02 Asphalt Mixtures and Mixtures With RAP.

PART: Lot Pay Adjustment Schedule, Compaction Option A, Surface Mixtures

TABLES: AV, LANE DENSITY, and JOINT DENSITY

REVISION: Replace the AV, LANE DENSITY, and JOINT DENSITY tables with the following:

AV

Pay Value	Test Result (%)	
	ESAL Class 2	ESAL Class 3 or 4
1.00	3.0-5.0	3.0-5.0
1.00 + 0.1 (AV-3.0)	1.5-2.9	2.0-2.9
1.00 + 0.1 (5.0-AV)	5.1-6.0	5.1-6.0
0.75	6.1-6.5	----
(1)	< 1.5 or > 6.5	< 2.0 or > 6.0

LANE DENSITY

Pay Value	Test Result (%)	
	ESAL Class 2	ESAL Class 3 or 4
1.00	92.0-96.5	92.0-96.5
0.95	91.0-91.9	91.0-91.9
0.90	90.0-90.9 or 96.6-97.0	90.0-90.9 or 96.6-97.0
0.85	97.1-98.5	----
0.75	89.0-89.9	----
(1)	< 89.0 or > 98.5	< 90.0 or > 97.0

JOINT DENSITY

Pay Value	Test Result (%)
1.00	89.0-96.5
0.95	88.0-88.9
0.90	87.0-87.9 or 96.6-97.0
0.75	< 87.0 or > 97.0

SUBSECTION: 402.05.02 Asphalt Mixtures and Mixtures With RAP.

PART: Lot Pay Adjustment Schedule, Compaction Option B Mixtures

TABLE: AV

REVISION: Replace the AV table with the following:

AV

Pay Value	Test Result (%)	
	ESAL Class 2	ESAL Class 3 or 4
1.00	3.0-5.0	3.0-5.0
1.00 + 0.1 (AV-3.0)	1.5-2.9	2.0-2.9
1.00 + 0.1 (5.0-AV)	5.1-6.0	5.1-6.0
0.75	6.1-6.5	----
(2)	< 1.5 or > 6.5	< 2.0 or > 6.0

SUBSECTION: 410.01 DESCRIPTION.

REVISION: Delete the second sentence of the paragraph.

Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition

(Effective with the October 31, 2008 Letting)

SUBSECTION: 410.03.01 Corrective Work.

REVISION: Replace the last sentence of the paragraph with the following:

Provide a final surface comparable to the adjacent pavement that does not require corrective work in respect to texture, appearance, and skid resistance.

SUBSECTION: 410.03.02 Ride Quality.

PART: B) Requirements.

NUMBER: 1) Category A.

REVISION: Replace the last sentence of the first paragraph with the following:

At the Department's discretion, a pay deduction of $1200 per 0.1-lane-mile section may be applied in lieu of corrective work.

SUBSECTION: 410.03.02 Ride Quality.

PART: B) Requirements.

NUMBER: 2) Category B.

REVISION: Replace the second and third sentence of the first paragraph with the following:

When the IRI is greater than 90 for a 0.1-mile section, perform corrective work, or remove and replace the pavement to achieve the specified IRI. At the Department's discretion, a pay deduction of $750 per 0.1-lane-mile section may be applied in lieu of corrective work.

SUBSECTION: 410.05 PAYMENT.

REVISION: Delete the last sentence of the first paragraph.

SUBSECTION: 410.05 PAYMENT.

TABLE: RIDE QUALITY ADJUSTMENT SCHEDULES

REVISION: Replace the adjustment tables with the following:

RIDE QUALITY ADJUSTMENT SCHEDULES

CATEGORY "A" PROJECTS		CATEGORY "B" PROJECTS	
IRI	**Pay Value Adjustment**	**IRI**	**Pay Value Adjustment**
70 or less	0	80 or less	0
71	-$30	81	-$20
72	-$70	82	-$45
73	-$120	83	-$80
74	-$180	84	-$120
75	-$250	85	-$170
76	-$330	86	-$220
77	-$420	87	-$280
78	-$520	88	-$350
79	-$630	89	-$420
80	-$750	90	-$500
81 or higher	corrective work[(1)]	91 or higher	corrective work[(2)]

[(1)]When it is in the best interest of the Department, a minimum pay value deduction of $1200 per 0.1-lane-mile section may be applied in lieu of corrective work.
[(2)]When it is in the best interest of the Department, a minimum pay value deduction of $750 per 0.1-lane-mile section may be applied in lieu of corrective work.

SUBSECTION: 509.01 DESCRIPTION.

REVISION: Replace the second paragraph with the following:

The Department may allow the use of similar units that conform to the National Cooperative Highway Research Program (NCHRP) 350 Test Level 3 (TL-3) requirements and the typical features depicted by the Standard Drawings. Obtain the Engineers approval prior to use. Ensure the barrier wall shape, length, material, drain slot dimensions and locations typical features are met and the reported maximum deflection is 3 feet or less from the NCHRP 350 TL-3 for Test 3 – 11 (pickup truck

Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition

(Effective with the October 31, 2008 Letting)

impacting at 60 mph at a 25-degree angle.)

SUBSECTION: 606.02.11 Coarse Aggregate.
REVISION: Replace with the following:

Conform to Section 805, size No. 8 or 9-M.

SUBSECTION: 701.03.08 Testing of Pipe.
REVISION: Replace and rename the subsection with the following:

701.03.08 Inspection of Pipe. The engineer will visually inspect all pipe. The Department will require camera/video inspection on a minimum of 50 percent of the linear feet of all installed pipe structures. Conduct camera/video inspection according to KM 64-114. The pipe to be installed under pavement will be selected first. If the total linear feet of pipe under pavement is less than 50 percent of the linear feet of all pipe installed, the Engineer will randomly select installations from the remaining pipe structures on the project to provide for the minimum inspection requirement. The pipe will be selected in complete runs (junction-junction or headwall-headwall) until the total linear feet of pipe to be inspected is at least 50 percent of the total linear feet of all installed pipe on the project.

Unless the Engineer directs otherwise, schedule the inspections no sooner than 30 days after completing the installation and completion of earthwork to within 1 foot of the finished subgrade. When final surfacing conflicts with the 30-day minimum, conduct the inspections prior to placement of the final surface. The contractor must ensure that all pipe are free and clear of any debris so that a complete inspection is possible.

Notify the Engineer immediately if distresses or locations of improper installation are discovered. When camera testing shows distresses or improper installation in the installed pipe, the Engineer may require additional sections to be tested. Provide the video and report to the Engineer when testing is complete in accordance with KM 64-114.

Pipes that exhibit distress or signs of improper installation may necessitate repair or removal as the Engineer directs. These signs include, but are not limited to: deflection, cracking, joint separation, sagging or other interior damage. If corrugated metal or thermoplastic pipes exceed the deflection and installation thresholds indicated in the table below, provide the Department with an evaluation of each location conducted by a Professional Engineer addressing the severity of the deflection, structural integrity, environmental conditions, design service life, and an evaluation of the factor of safety using Section 12, "Buried Structures and Tunnel Liners," of the AASHTO LRFD Bridge Design Specifications. Based on the evaluation, the Department may allow the pipe to remain in place at a reduced unit price as shown in the table below. Provide 5 business days for the Department to review the evaluation. When the pipe shows deflection of 10 percent or greater, remove and replace the pipe. When the camera/video or laser inspection results are called into question, the Department may require direct measurements or mandrel testing.

The Cabinet may elect to conduct Quality Assurance verifications of any pipe inspections.

SUBSECTION: 701.04.07 Testing.
REVISION: Replace and rename the subsection with the following:

701.04.07 Pipeline Video Inspection. The Department will measure the quantity in linear feet along the pipe invert of the structure inspected. When inspection above the specified 50 percent is performed due to a disagreement or suspicion of additional distresses and the Department is found in error, the Department will measure the quantity as Extra Work according to Subsection 104.03. However, if additional distresses or non-conformance is found, the Department will not measure the additional inspection for payment.

SUBSECTION: 701.05 PAYMENT.
REVISION: Add the following pay item to the list of pay items:

Code	Pay Item	Pay Unit
23131ER701	Pipeline Video Inspection	Linear Foot

Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition

(Effective with the October 31, 2008 Letting)

SUBSECTION: 701.05 PAYMENT
TABLE: PIPE DEFLECTION DETERMINED BY CAMERA TESTING
REVISION: Replace this table with the following table and note:

PIPE DEFLECTION	
Amount of Deflection (%)	Payment
0.0 to 5.0	100% of the Unit Bid Price
5.1 to 9.9	50% of the Unit Bid Price [(1)]
10 or greater	Remove and Replace

[(1)] *Provide Structural Analysis as indicated above. Based on the structural analysis, pipe may be allowed to remain in place at the reduced unit price.*

SUBSECTION: 701.05 PAYMENT
TABLE: PIPE DEFLECTION DETERMINED BY MANDREL TESTING
REVISION: Delete this table.

SUBSECTION: 805.01 GENERAL.
REVISION: Replace the second paragraph with the following:

The Department's List of Approved Materials includes the Aggregate Source List, the list of Class A and Class B Polish-Resistant Aggregate Sources, and the Concrete Restriction List.

SUBSECTION: 805.04 CONCRETE.
REVISION: Replace the "AASHTO T 160" reference in first sentence of the third paragraph with "KM 64-629"

SUBSECTION: 805.15 GRADATION ACCEPTANCE OF NON-SPECIFICATION COARSE AGGREGATE.
TABLE: AGGREGATE SIZE USE
PART: Cement Concrete Structures and Incidental Construction
REVISION: Replace "9-M for Waterproofing Overlays" with "8 or 9-M for Waterproofing Overlays"

SUBSECTION: 805.16 SAMPLING AND TESTING.
REVISION: Replace the "AASHTO T 160" method with the "KM 64-629" method for the Concrete Beam Expansion Test.

Replace the "ASTM D 3042" method with the "KM 64-625" method for Insoluble Residue.

SUBSECTION: 810.04.01 Coating Requirements.
REVISION: Replace the "Subsection 806.07" references with "Subsection 806.06"

SUBSECTION: 837.03 APPROVAL.
REVISION: Replace the last sentence with the following:

The Department will sample and evaluate for approval each lot of thermoplastic material delivered for use per contract prior to installation of the thermoplastic material. Do not allow the installation of thermoplastic material until it has been approved by the Division of Materials. Allow the Department a minimum of 10 working days to evaluate and approve thermoplastic material.

SUBSECTION: 837.03.01 Composition.
REVISION: COMPOSITION Table:

Replace

Lead Chromate	0.0 max.	4.0 min.

with

Heavy Metals Content	Comply with 40 CFR 261

Supplemental Specifications to The Standard Specifications for Road and Bridge Construction, 2008 Edition

(Effective with the October 31, 2008 Letting)

SUBSECTION: 805.15 GRADATION ACCEPTANCE OF NON-SPECIFICATION COARSE AGGREGATE.
REVISION: Replace the "SIZES OF COARSE AGGREGATES" table in with the following:

SIZES OF COARSE AGGREGATES

	Sieve	AMOUNTS FINER THAN EACH LABORATORY SIEVE (SQUARE OPENINGS) PERCENTAGE BY WEIGHT															
Aggregate Size	Nominal (3) Maximum Aggregate Size	4 inch	3 1/2 inch	3 inch	2 1/2 inch	2 inch	1 1/2 inch	1 inch	3/4 inch	1/2 inch	3/8 inch	No. 4	No. 8	No. 16	No. 30	No. 100	No. 200
1	3 ½ inch	100	90-100		25-60		0-15		0-5								
2	2 ½ inch			100	90-100	35-70	0-15		0-5								
23	2 inch			100		40-90		0-15		0-5							
3	2 inch				100	90-100	35-70	0-15		0-5							
357	2 inch				100	95-100		35-70		10-30		0-5					
4	1 ½ inch					100	90-100	20-55	0-15		0-5						
467	1 ½ inch					100	95-100		35-70		10-30	0-5					
5	1 inch						100	90-100	20-55	0-10	0-5						
57	1 inch						100	95-100		25-60		0-10	0-5				
610	1 inch						100	85-100		40-75		15-40					
67	3/4 inch							100	90-100		20-55	0-10	0-5				
68	3/4 inch							100	90-100		30-65	5-25	0-10	0-5			
710	3/4 inch							100	80-100		30-75	0-30					
78	1/2 inch								100	90-100	40-75	5-25	0-10	0-5			
8	3/8 inch									100	85-100	10-30	0-10	0-5			
9-M	3/8 inch									100	75-100	0-25	0-5				
10(2)	No. 4										100	85-100				10-30	
11(2)	No. 4										100	40-90	10-40			0-5	
DENSE GRADED AGGREGATE (1)	3/4 inch							100	70-100		50-80	30-65			10-40		4-13
CRUSHED STONE BASE (1)	1 ½ inch				100		90-100		60-95		30-70	15-55			5-20		0-8

(1) *Gradation performed by wet sieve KM 64-620 or AASHTO T 11/T 27.*
(2) *Sizes shown for convenience and are not to be considered as coarse aggregates.*
(3) *Nominal Maximum Size is the largest sieve on the gradation table for an aggregate size on which any material may be retained.*

Note: The Department will allow blending of same source/same type aggregate when precise procedures are used such as cold feed, belt, or equivalent and combining of sizes or types of aggregate using the weigh hopper at concrete plants or controlled feed belts at the pugmill to obtain designated sizes.

STANDARD DRAWINGS THAT APPLY

ROADWAY

~ *GENERAL* ~

MISCELLANEOUS STANDARDS

MISCELLANEOUS STANDARDS PART 1 ..... RGX-001-04

~ *PAVEMENT* ~

MEDIANS, CURBS, APPROACHES, ENTRANCES, ETC.

APPROACHES, ENTRANCES, AND MAIL BOX TURNOUT RPM-110-04

TRAFFIC

~ *TEMPORARY* ~

TRAFFIC CONTROL

LANE CLOSURE TWO-LANE HIGHWAY CASE I TTC-100
LANE CLOSURE TWO-LANE HIGHWAY CASE II TTC-105

DEVICES

MISCELLANEOUS TRAFFIC CONTROL DEVICES TTD-100
MISCELLANEOUS TRAFFIC CONTROL DEVICES TTD-105
POST SPLICING DETAIL TTD-110

PART III

EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

TRANSPORTATION CABINET
DEPARTMENT OF HIGHWAYS

LABOR AND WAGE REQUIREMENTS
APPLICABLE TO OTHER THAN FEDERAL-AID SYSTEM PROJECTS

I. Application
II. Nondiscrimination of Employees (KRS 344)
III. Payment of Predetermined Minimum Wages
IV. Statements and Payrolls

I. APPLICATION

1. These contract provisions shall apply to all work performed on the contract by the contractor with his own organization and with the assistance of workmen under his immediate superintendence and to all work performed on the contract by piecework, station work or by subcontract. The contractor's organization shall be construed to include only workmen employed and paid directly by the contractor and equipment owned or rented by him, with or without operators.

2. The contractor shall insert in each of his subcontracts all of the stipulations contained in these Required Provisions and such other stipulations as may be required.

3. A breach of any of the stipulations contained in these Required Provisions may be grounds for termination of the contract.

II. NONDISCRIMINATION OF EMPLOYEES

AN ACT OF THE KENTUCKY
GENERAL ASSEMBLY TO PREVENT
DISCRIMINATION IN EMPLOYMENT
KRS CHAPTER 344
EFFECTIVE JUNE 16, 1972

The contract on this project, in accordance with KRS Chapter 344, provides that during the performance of this contract, the contractor agrees as follows:

1. The contractor shall not fail or refuse to hire, or shall not discharge any individual, or otherwise discriminate against an individual with respect to his compensation, terms, conditions, or privileges of employment, because of such individual's race, color, religion, national origin, sex, disability or age (between forty and seventy); or limit, segregate, or classify his employees in any way which would deprive or tend to deprive an individual of employment opportunities or otherwise adversely affect his status as an employee, because of such individual's race, color, religion, national origin, sex, disability or age (between forty and seventy). The contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.

2. The contractor shall not print or publish or cause to be printed or published a notice or advertisement relating to employment by such an employer or membership in or any classification or referral for employment by the employment agency, indicating any preference, limitation, specification, or discrimination, based on race, color, religion, national origin, sex, disability or age (between forty and seventy), except that such notice or advertisement may indicate a preference, limitation, or specification based on religion, or national origin when religion, or national origin is a bona fide occupational qualification for employment.

3. If the contractor is in control of apprenticeship or other training or retraining, including on-the-job training programs, he shall not discriminate against an individual because of his race, color, religion, national origin, sex, disability or age (between forty and seventy), in admission to, or employment in any program established to provide apprenticeship or other training.

4. The contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other contract or understanding, a notice to be provided advising the said labor union or workers' representative of the contractor's commitments under this section, and shall post copies of the notice in conspicuous places available to employees and applicants for employment. The contractor will take such action with respect to any subcontract or purchase order as the administrating agency may direct as a means of enforcing such provisions, including sanctions for non-compliance.

III. PAYMENT OF PREDETERMINED MINIMUM WAGES

1. These special provisions are supplemented elsewhere in the contract by special provisions which set forth certain predetermined minimum wage rates. The contractor shall pay not less than those rates.

2. The minimum wage determination schedule shall be posted by the contractor, in a manner prescribed by the Department of Highways, at the site of the work in prominent places where it can be easily seen by the workers.

IV. STATEMENTS AND PAYROLLS

1. All contractors and subcontractors affected by the terms of KRS 337.505 to 337.550 shall keep full and accurate payroll records covering all disbursements of wages to their employees to whom they are required to pay not less than the prevailing rate of wages. Payrolls and basic records relating thereto will be maintained during the course of the work and preserved for a period of one (1) year from the date of completion of this contract.

2. The payroll records shall contain the name, address and social security number of each employee, his correct classification, rate of pay, daily and weekly number of hours worked, itemized deductions made and actual wages paid.

3. The contractor shall make his daily records available at the project site for inspection by the State Department of Highways contracting office or his authorized representative.

Periodic investigations shall be conducted as required to assure compliance with the labor provisions of the contract. Interrogation of employees and officials of the contractor shall be permitted during working hours.

Aggrieved workers, Highway Managers, Assistant District Engineers, Resident Engineers and Project Engineers shall report all complaints and violations to the Division of Contract Procurement.

The contractor shall be notified in writing of apparent violations. The contractor may correct the reported violations and notify the Department of Highways of the action taken or may request an informal hearing. The request for hearing shall be in writing within ten (10) days after receipt of the notice of the reported violation. The contractor may submit

records and information which will aid in determining the true facts relating to the reported violations.

Any person or organization aggrieved by the action taken or the findings established as a result of an informal hearing by the Division of Contract Procurement may request a formal hearing.

4. The wages of labor shall be paid in legal tender of the United States, except that this condition will be considered satisfied if payment is made by a negotiable check, on a solvent bank, which may be cashed readily by the employee in the local community for the full amount, without discount or collection charges of any kind. Where checks are used for payments, the contractor shall make all necessary arrangements for them to be cashed and shall give information regarding such arrangements.

5. No fee of any kind shall be asked or accepted by the contractor or any of his agents from any person as a condition of employment on the project.

6. No laborers shall be charged for any tools used in performing their respective duties except for reasonably avoidable loss or damage thereto.

7. Every employee on the work covered by this contract shall be permitted to lodge, board, and trade where and with whom he elects and neither the contractor nor his agents, nor his employees shall directly or indirectly require as a condition of employment that an employee shall lodge, board or trade at a particular place or with a particular person.

8. Every employee on the project covered by this contract shall be an employee of either the prime contractor or an approved subcontractor.

9. No charge shall be made for any transportation furnished by the contractor or his agents to any person employed on the work.

10. No individual shall be employed as a laborer or mechanic on this contract except on a wage basis, but this shall not be construed to prohibit the rental of teams, trucks or other equipment from individuals.

No Covered employee may be employed on the work except in accordance with the classification set forth in the schedule mentioned above; provided, however, that in the event additional classifications are required, application shall be made by the contractor to the Department of Highways and (1) the Department shall request appropriate classifications and rates from the proper agency, or (2) if there is urgent need for additional classification to avoid undue delay in the work, the contractor may employ such workmen at rates deemed comparable to rates established for similar classifications provided he has made written application through the Department of Highways, addressed to the proper agency, for the supplemental rates. The contractor shall retroactively adjust, upon receipt of the supplemental rates schedule, the wages of any employee paid less than the established rate and may adjust the wages of any employee overpaid.

11. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any laborer or mechanic in any work-week in which he is employed on such work, to work in excess of eight hours in any calendar day or in excess of forty hours in such work-week unless such laborer or mechanic receives compensation at a rate not less than one and one half times his basic rate of pay for all hours worked in excess of eight hours in any calendar day or in excess of forty hours in such work-week. A laborer, workman or mechanic and an employer may enter into a written agreement or a collective bargaining agreement to work more than eight (8) hours a calendar day but not more than ten (10) hours a calendar day for the straight time hourly rate. This agreement shall be in writing and shall be executed prior to the employee working in excess of eight (8) hours, but not more than ten (10) hours, in any one (1) calendar day.

12. Payments to the contractor may be suspended or withheld due to failure of the contractor to pay any laborer or mechanic employed or working on the site of the work, all or part of the wages required under the terms of the contract. The Department may suspend or withhold payments only after the contractor has been given written notice of the alleged violation and the contractor has failed to comply with the wage determination of the Department of Highways.

13. Contractors and subcontractors shall comply with the sections of Kentucky Revised Statutes, Chapter 337 relating to contracts for Public Works.

Revised 2-16-95

EXECUTIVE BRANCH CODE OF ETHICS

In the 1992 regular legislative session, the General Assembly passed and Governor Brereton Jones signed Senate Bill 63 (codified as KRS 11A), the Executive Branch Code of Ethics, which states, in part:

KRS 11A.040 (6) provides:

No present or former public servant shall, within six (6) months of following termination of his office or employment, accept employment, compensation or other economic benefit from any person or business that contracts or does business with the state in matters in which he was directly involved during his tenure. This provision shall not prohibit an individual from returning to the same business, firm, occupation, or profession in which he was involved prior to taking office or beginning his term of employment, provided that, for a period of six (6) months, he personally refrains from working on any matter in which he was directly involved in state government. This subsection shall not prohibit the performance of ministerial functions, including, but not limited to, filing tax returns, filing applications for permits or licenses, or filing incorporation papers.

KRS 11A.040 (8) states:

A former public servant shall not represent a person in a matter before a state agency in which the former public servant was directly involved, for a period of one (1) year after the latter of:

a) The date of leaving office or termination of employment; or
b) The date the term of office expires to which the public servant was elected.

This law is intended to promote public confidence in the integrity of state government and to declare as public policy the idea that state employees should view their work as a public trust and not as a way to obtain private benefits.

If you have worked for the executive branch of state government within the past six months, you may be subject to the law's prohibitions. The law's applicability may be different if you hold elected office or are contemplating representation of another before a state agency.

Also, if you are affiliated with a firm which does business with the state and which employs former state executive-branch employees, you should be aware that the law may apply to them.

In case of doubt, the law permits you to request an advisory opinion from the Executive Branch Ethics Commission, Room 136, Capitol Building, 700 Capitol Avenue, Frankfort, Kentucky 40601; telephone (502) 564-7954.

Kentucky Equal Employment Opportunity Act of 1978

The requirements of the Kentucky Equal Employment Opportunity Act of 1978 (KRS 45.560-45.640) shall apply to this Contract. The apparent low Bidder will be required to submit EEO forms to the Division of Construction Procurement, which will then forward to the Finance and Administration Cabinet for review and approval. No award will become effective until all forms are submitted and EEO/CC has certified compliance. The required EEO forms are as follows:

- EEO-1: Employer Information Report
- Affidavit of Intent to Comply
- Employee Data Sheet
- Subcontractor Report

These forms are available on the Finance and Administration's web page under ***Vendor Information, Standard Attachments and General Terms*** at the following address: **https://www.eProcurement.ky.gov**.

Bidders currently certified as being in compliance by the Finance and Administration Cabinet may submit a copy of their approval letter in lieu of the referenced EEO forms.

For questions or assistance please contact the Finance and Administration Cabinet by email at **finance.contractcompliance@ky.gov** or by phone at 502-564-2874.

TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES

	HIGHWAY BASIC HOURLY RATES	FRINGE BENEFIT PAYMENTS COMBINED
CRAFTS:		
Ballard, Butler, Caldwell, Carlisle, Crittenden, Daviess, Edmonson, Fulton, Graves, Hancock, Henderson, Hickman, Hopkins, Livingston, Lyon, Marshall, McCracken, McLean, Muhlenberg, Ohio, Union & Webster Counties:		
Bricklayers	26.20	11.55
Allen, Calloway, Christian, Logan, Simpson, Todd, Trigg & Warren Counties:		
Bricklayers	25.10	1.60
All Counties:		
Carpenters	24.84	10.23
Divers	37.64	10.23
Piledrivermen	25.09	10.23
Butler, Edmonson, Logan, Todd & Warren Counties:		
Electricians	25.91	23.5% + 4.55
Allen & Simpson Counties:		
Electricians	21.40	9.75
Ballard, Caldwell, Calloway, Carlisle, Christian, Crittenden, Fulton (Except a 5 mile radius of City Hall in Fulton), Graves, Hickman, Livingston, Lyon, Marshall, McCracken & Trigg Counties:		
Electricians:		
Electricians	28.02	25.5% + 5.15
Cable Splicers receive $ .25 per hour additional.		
Daviess, Hancock, Henderson, Hopkins, McLean, Muhlenberg, Ohio, Union & Webster Counties:		
Electricians:		
Electricians:	26.66	27.85% + 5.34
Heilarc Welding & Cable Splicing	26.91	27.85% + 5.34
Fulton County (Up to a 5 mile radius of City Hall in Fulton):		
Electricians	18.50	9.99
Cable Splicers	19.00	9.99
Butler County (Eastern eighth, including the Townships of Decker, Lee & Tilford);		
Edmonson County (Northern three-fourths, including the Townships of Asphalt, Bee Spring, Brownsville, Grassland, Huff, Kyrock, Lindseyville, Mammoth Cave, Ollie, Prosperity, Rhoda, Sunfish & Sweden):		
Ironworkers:		
Structural; Ornamental; Reinforcing;		
Precast Concrete Erectors	23.93	16.74

TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES

	HIGHWAY BASIC HOURLY RATES	FRINGE BENEFIT PAYMENTS COMBINED

CRAFTS: (continued)

Butler County (Townships of Aberdeen, Bancock, Casey, Dexterville, Dunbar, Elfie, Gilstrap, Huntsville, Logansport, Monford, Morgantown, Provo, Rochester, and South Hill & Welchs Creek); Caldwell County (Northeastern third, including the Township of Creswell); Christian County (Northern third, including Townships of Apex, Crofton, Kelly, Mannington and Wynns); Crittenden County (Northeastern half, including the Townships of Grove, Mattoon, Repton, Shady Grove and Tribune); Muhlenberg County (Townships of Bavier, Beech Creek Junction, Benton, Brennen, Browder, Central City, Cleaton, Depoy, Drakesboro, Eunis, Graham, Hillside, Luzerne, Lynn City, Martwick, McNary, Moorman, Millport, Nelson, Paradise, Powderly, South Carrollton, Tarina and Weir);

Daviess, Hancock, Henderson, Hopkins, McLean, Ohio, Union and Webster Counties:
Ironworkers .....24.75.....14.225

Butler County (Southern third, including the Townships of Boston, Berrys Lick, Dimple, Jetson, Quality, Sharer, Sugar Grove and Woodbury);
Christian County (Eastern two-thirds, including the Townships of Bennettstown, Casky, Herndon, Hopkinsville, Howell, Masonville, Pembroke and Thompsonville);
Edmonson County (Southern fourth, including the Townships of Chalybeate & Rocky Hill);
Muhlenberg County (Southern eighth, including the Townships of Dunnior, Penrod & Rosewood);

Allen, Logan, Simpson, Todd and Warren Counties:
Ironworkers .....21.60.....9.45

Caldwell County (Southwestern two-thirds, including the Townships of Cedar Bluff, Cider, Claxton, Cobb, Crowtown, Dulaney, Farmersville, Fredonia, McGowan, Otter Pond and Princeton);
Christian County (Western third, excluding the Townships of Apex, Crofton, Kelly, Mannington, Wynns, Bennettstown, Casky, Herndon, Hopkinsville, Howell, Masonville, Pembroke and Thompsonville);
Crittenden County (Southwestern half, including the Townships of Crayne, Dycusburg, Frances, Marion, Mexico, Midway, Sheridan and Told);

Ballard, Calloway, Carlisle, Fulton, Graves, Hickman, Livingston, Lyon, Marshall, McCracken and Trigg Counties:
Ironworkers
Projects with a total contract cost of $20,000,000.00 or above
.....24.74.....15.04
All other work.....23.44.....13.98

Allen, Butler, Edmonson, Logan, Simpson & Warren Counties:
Millwrights.....24.10.....14.87

TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES

	HIGHWAY BASIC HOURLY RATES	FRINGE BENEFIT PAYMENTS COMBINED

CRAFTS: (continued)

Ballard, Caldwell, Calloway, Carlisle, Christian, Crittenden, Fulton, Graves, Hickman, Hopkins, Livingston, Lyon, Marshall, McCracken, Todd & Trigg Counties:
Millwrights:.....23.10.....14.09
Daviess, Hancock, Henderson, McLean, Muhlenberg, Ohio, Union & Webster Counties:
Millwrights:.....23.18.....13.66
Ballard County:
Painters:
Bridges and Dams .....28.81.....11.68
All Other Work .....24.51.....11.68
Spray, Blast, Steam, High and Hazardous (Including Lead Abatement) and All Epoxy – 1.00 Premium.
Edmonson County:
Painters:
Brush & Roller.....18.22.....9.37
Spray, Sandblast, Power Tools,
Waterblast & Steam Cleaning.....18.97.....9.37
Daviess, Hancock, Henderson, McLean, Ohio, Union & Webster Counties:
Painters:
Bridges, Locks & Dams:
GROUP 1 .....25.60.....10.05
GROUP 2 .....25.85.....10.05
GROUP 3 .....26.60.....10.05
GROUP 4 .....27.60.....10.05
All Other Work:
GROUP 1 .....24.45.....10.05
GROUP 2 .....24.70.....10.05
GROUP 3 .....25.45.....10.05
GROUP 4 .....26.45.....10.05

PAINTER CLASSIFICATIONS
GROUP 1 – Brush & Roller
GROUP 2 – Plasterers
GROUP 3 – Spray; Sandblast; Power Tools; Waterblast; Steamcleaning; Brush & Roller of Mastics, Creosotes, Kwinch Koate & Coal Tar Epoxy
GROUP 4 – Spray of Mastics, Creosotes, Kwinch Koate & Coal Tar Epoxy

TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES

	HIGHWAY BASIC HOURLY RATES	FRINGE BENEFIT PAYMENTS COMBINED
Allen, Butler, Logan, Muhlenberg, Simpson, Todd & Warren Counties:		
Painters:		
Bridges, Locks & Dams		
Brush & Roller	22.05	7.90
Bridges, Locks & Dams		
Spray; Sandblast; Power Tools; Waterblast & Steam Cleaning	23.05	7.90
All Other Work		
Brush & Roller	17.05	7.90
All Other Work		
Spray; Sandblast; Power Tools; Waterblast & Steam Cleaning	18.05	7.90
All Other Work – High Time Pay		
Over 35 feet (up to 100 feet) - $1.00 above base wage		
100 feet and over - $2.00 above base wage		
During spray painting and sandblasting operations, pot tenders shall receive the same wage rates as the spray painter or nozzle operator		
Caldwell, Calloway, Carlisle, Christian, Crittenden, Fulton, Graves, Hickman, Hopkins, Livingston, Lyon, Marshall, McCracken & Trigg Counties:		
Painters:		
Bridges and Dams	24.75	9.55
All Other Work	18.50	9.55
Waterblasting units with 3500 PSI and above - $.50 premium		
Spraypainting and all abrasive blasting - $1.00 premium		
Work 40 ft. and above ground level - $1.00 premium		
Allen, Butler, Edmonson, Simpson, Warren Counties:		
Plumber/Steamfitter	30.00	12.67
Ballard, Caldwell, Calloway, Carlisle, Christian, Crittenden, Fulton, Graves, Hickman, Livingston, Lyon, Marshall, McCracken & Trigg Counties:		
Plumbers & Steamfitters	28.98	12.55
Daviess, Hancock, Henderson, Hopkins, Logan, McLean, Muhlenberg, Ohio, Todd, Union & Webster Counties:		
Plumbers & Pipefitters	26.92	11.15
Welders - Receive rate for craft in which welding is incidental.		

TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES

LABORERS:

Ballard, Calloway, Carlisle, Fulton, Graves, Hickman, Livingston, Lyon, Marshall and McCracken Counties:

GROUP 1 - Aging & Curing of Concrete, Asbestos Abatement Worker, Asphalt Plant, Asphalt, Batch Truck Dump, Carpenter Tender, Cement Mason Tender, Cleaning of Machines, Concrete, Demolition, Dredging, Environmental -Nuclear Radiation, Toxic & Hazardous Waste - Level D, Flagperson, Grade Checker, Hand Digging & Hand Back Filling, Highway Marker Placer, Landscaping, Mesh Handler & Placer, Puddler, Railroad, Nip-Rap & Grouter, Right-of-Way, Sign, Guard Rail & Fence Installer, Signal Person, Sound Barrier Installer, Storm & Sanitary Sewer, Swamper, Truck Spotter & Dumper & Wrecking of Concrete Forms, General Cleanup.

BASE RATE 19.43
FRINGE BENEFITS 9.98

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer), Brickmason Tender, Mortar Mixer Operator, Scaffold Builder, Burner & Welder, Bushammer, Chain Saw Operator, Concrete Saw Operator, Deckhand Scow Man, Dry Cement Handler, Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level C, Forklift Operator for Masonary, Form Setter, Green Concrete Cutting, Hand Operated Grouter & Grinder Machine Operator, Jackhammer, Pavement Breaker, Paving Joint Machine, Pipelayer, Plastic Pipe Fusion, Power Driven Georgia Buggy & Wheelbarrow, Power Post Hole Digger, Precast Manhole Setter, Walk-Behind Tamper, Walk-Behind Trencher, Sand Blaster, Concrete Chipper, Surface Grinder, Vibrator Operator and Wagon Driller.

BASE RATE 19.68
FRINGE BENEFITS 9.98

GROUP 3 - Asphalt Luteman & Raker, Gunnite Nozzleman, Gunnite Operator & Mixer, Grout Pump Operator, Blaster, Side Rail Setter, Rail Paved Ditches, Screw Operator, Tunnel (Free Air), and Water Blaster .

BASE RATE 19.73
FRINGE BENEFITS 9.98

GROUP 4 - Caisson Worker (Free Air), Cement Finisher, Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Levels A & B, Miner & Driller (Free Air), Tunnel Blaster and Tunnel Mucker (Free Air), Directional & Horizontal Boring, Air Track Drillers (All Types), Powderman & Blasters, Troxler & Concrete Tester if Laborer is Utilized.

BASE RATE 20.33
FRINGE BENEFITS 9.98

TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES

LABORERS:

Allen, Butler, Caldwell, Christian, Daviess, Edmonson, Hancock, Hopkins, Logan, McLean, Muhlenberg, Ohio Simpson, Todd, Trigg and Warren Counties;

GROUP 1 - Aging & Curing of Concrete, Asbestos Abatement Worker, Asphalt Plant, Asphalt, Batch Truck Dump, Carpenter Tender, Cement Mason Tender, Cleaning of Machines, Concrete, Demolition, Dredging, Environmental -Nuclear Radiation, Toxic & Hazardous Waste - Level D, Flagperson, Grade Checker, Hand Digging & Hand Back Filling, Highway Marker Placer, Landscaping, Mesh Handler & Placer, Puddler, Railroad, Nip-Rap & Grouter, Right-of-Way, Sign, Guard Rail & Fence Installer, Signal Person, Sound Barrier Installer, Storm & Sanitary Sewer, Swamper, Truck Spotter & Dumper & Wrecking of Concrete Forms, General Cleanup.

BASE RATE 20.46
FRINGE BENEFITS 8.95

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer), BrickMason Tender, Mortar Mixer Operator, Scaffold Builder, Burner & Welder, Bushammer, Chain Saw Operator, Concrete Saw Operator, Deckhand Scow Man, Dry Cement Handler, Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level C, Forklift Operator for Masonary, Form Setter, Green Concrete Cutting, Hand Operated Grouter & Grinder Machine Operator, Jackhammer, Pavement Breaker, Paving Joint Machine, Pipelayer, Plastic Pipe Fusion, Power Driven Georgia Buggy & Wheelbarrow, Power Post Hole Digger, Precast Manhole Setter, Walk-Behind Tamper, Walk-Behind Trencher, Sand Blaster, Concrete Chipper, Surface Grinder, Vibrator Operator and Wagon Driller.

BASE RATE 20.71
FRINGE BENEFITS 8.95

GROUP 3 - Asphalt Luteman & Raker, Gunnite Nozzleman, Gunnite Operator & Mixer, Grout Pump Operator, Blaster, Side Rail Setter, Rail Paved Ditches, Screw Operator, Tunnel (Free Air), and Water Blaster .

BASE RATE 20.76
FRINGE BENEFITS 8.95

GROUP 4 - Caisson Worker (Free Air), Cement Finisher, Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Levels A & B, Miner & Driller (Free Air), Tunnel Blaster and Tunnel Mucker (Free Air), Directional & Horizontal Boring, Air Track Drillers (All Types), Powderman & Blasters, Troxler & Concrete Tester if Laborer is Utilized.

BASE RATE 21.36
FRINGE BENEFITS 8.95

TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES

LABORERS:
Crittenden, Henderson, Union and Webster Counties:

GROUP 1 - Aging & Curing of Concrete, Asbestos Abatement Worker, Asphalt Plant, Asphalt, Batch Truck Dump, Carpenter Tender, Cement Mason Tender, Cleaning of Machines, Concrete, Demolition, Dredging, Environmental -Nuclear Radiation, Toxic & Hazardous Waste - Level D, Flagperson, Grade Checker, Hand Digging & Hand Back Filling, Highway Marker Placer, Landscaping, Mesh Handler & Placer, Puddler, Railroad, Nip-Rap & Grouter, Right-of-Way, Sign, Guard Rail & Fence Installer, Signal Person, Sound Barrier Installer, Storm & Sanitary Sewer, Swamper, Truck Spotter & Dumper & Wrecking of Concrete Forms, General Cleanup.

BASE RATE 19.51
FRINGE BENEFITS 9.90

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer), Brickmason Tender, Mortar Mixer Operator, Scaffold Builder, Burner & Welder, Bushammer, Chain Saw Operator, Concrete Saw Operator, Deckhand Scow Man, Dry Cement Handler, Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level C, Forklift Operator for Masonary, Form Setter, Green Concrete Cutting, Hand Operated Grouter & Grinder Machine Operator, Jackhammer, Pavement Breaker, Paving Joint Machine, Pipelayer, Plastic Pipe Fusion, Power Driven Georgia Buggy & Wheelbarrow, Power Post Hole Digger, Precast Manhole Setter, Walk-Behind Tamper, Walk-Behind Trencher, Sand Blaster, Concrete Chipper, Surface Grinder, Vibrator Operator and Wagon Driller.

BASE RATE 19.76
FRINGE BENEFITS 9.90

GROUP 3 - Asphalt Luteman & Raker, Gunnite Nozzleman, Gunnite Operator & Mixer, Grout Pump Operator, Blaster, Side Rail Setter, Rail Paved Ditches, Screw Operator, Tunnel (Free Air), and Water Blaster .

BASE RATE 19.81
FRINGE BENEFITS 9.90

GROUP 4 - Caisson Worker (Free Air), Cement Finisher, Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Levels A & B, Miner & Driller (Free Air), Tunnel Blaster and Tunnel Mucker (Free Air), Directional & Horizontal Boring, Air Tack Drillers (All Types), Powderman & Blasters, Troxler & Concrete Tester if Laborer is Utilized.

BASE RATE 20.41
FRINGE BENEFITS 9.90

TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES

TEAMSTERS:
Truck Drivers:
Allen, Butler, Edmonson, Logan, Simpson & Warren Counties:
Greaser, Tire Changer.

BASE RATE 19.04
FRINGE BENEFITS 12.02

Truck Mechanic.
BASE RATE 19.37
FRINGE BENEFITS 12.02

Single Axle Dump, Flat Bed, all Terrain Vehicles when used to haul materials, Semi Trailer or Pole Trailer when used to pull building materials and equipment, Tandem Axle Dump, Driver of Distributors, Mixer all types.

BASE RATE 19.44
FRINGE BENEFITS 12.02

Winch and A-frame when used in transporting materials, Ross Carrier, Fork Lift when used to transport building materials, Driver on Pavement Breaker.

BASE RATE 19.45
FRINGE BENEFITS 12.02

Euclid and other Heavy Earth Moving Equipment, Low Boy, Articulator Cat, Five Axle Vehicle.

BASE RATE 19.50
FRINGE BENEFITS 12.02

Ballard, Calloway, Caldwell, Carlisle, Christian, Crittenden, Fulton, Graves, Hickman, Livingston, Lyon, Marshall, McCracken, Todd & Trigg Counties:
Greaser, Tire Changer.

BASE RATE 23.89
FRINGE BENEFITS 4.15

Truck Mechanic.

BASE RATE 24.12
FRINGE BENEFITS 4.15

TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES

TEAMSTERS: (continue)
Single Axle Dump, Flat Bed, all Terrain Vehicles when used to haul materials, Semi Trailer or Pole Trailer when used to pull building materials and equipment, Tandem Axle Dump, Driver of Distributor, Mixer all types.

BASE RATE 24.19
FRINGE BENEFITS 4.15

Euclid, other Heavy Earth Moving Equipment, Low Boy, Articulator Cat, Five Axle Vehicle, Winch & A-Frame when used in transporting materials, Ross Carrier.

BASE RATE 24.20
FRINGE BENEFITS 4.15

Daviess, Hancock, Henderson, Hopkins, McLean, Muhlenberg, Ohio, Union & Webster Counties: Greaser, Tire Changer.

BASE RATE 19.23
FRINGE BENEFITS 9.20

Truck Mechanic.

BASE RATE 19.46
FRINGE BENEFITS 9.20

Single Axle Dump, Flat Bed, all Terrain Vehicle when used to haul materials, Semi Trailer or Pole Trailer when used to pull building materials and equipment, Tandem Axle Dump, Driver of Distributors, Mixer all types.

BASE RATE 19.53
FRINGE BENEFITS 9.20

Euclid and other Heavy Earth Moving Equipment, Low Boy, Articulator Cat, Five Axle Vehicle, Winch & A-Frame when used in transporting materials, Ross Carrier, Fork Lift when used to transport building materials, Driver on Pavement Breaker.

BASE RATE 19.54
FRINGE BENEFITS 9.20

TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES

OPERATING ENGINEERS:

A-frame Winch Truck, Auto Patrol, Backfiller, Batcher Plant, Bituminous Paver, Bituminous Transfer Machine, Boom Cat, Bulldozer, Mechanic, Cableway, Carry-All Scoop, Carry Deck Crane, Central Compressor Plant, Clamshell, Concrete Mixer (21 cu. ft. or over), Concrete Paver, Truck Mounted Concrete Pump, Core Drill, Crane, Crusher Plant, Derrick, Derrick Boat, Ditching and Trenching Machine, Dragline, Dredge Operator, Dredge Engineer, Elevating Grader and Loaders, Grade-All, Gurries, Heavy Equipment Robotics Operator/Mechanic, High Lift, Hoe-Type Machine, Hoist (two or more drums), Hoisting Engine (two or more drums), Horizontal Directional Drill Operator, Hydrocrane, Hyster, KeCal Loader, LeTourneau, Locomotive, Mechanic; Mechanically Operated Laser Screed, Mechanic Welder, Mucking Machine, Motor Scraper, Orangepeel Bucket, Piledriver, Power Blade, Pumpcrete, Push Dozer, Rock Spreader attached to equipment, Rotary Drill, Roller (bituminous), Scarifier, Scoopmobile, Shovel, Side Boom, Subgrader, Tailboom, Telescoping type Forklift, Tow or Push boat, Tower Crane (French, German and other types), Tractor Shovel, Truck Crane, Tunnel Mining Machines, including Moles, Shields or similar types of Tunnel Mining Equipment.

BASE RATE 23.60
FRINGE BENEFITS 12.40

Air Compressor (over 900 cu. ft. per min.), Bituminous Mixer, Boom Type Tamping Machine, Bull Float, Concrete Mixer (under 21 cu. ft.), Dredge Engineer, Electric Vibrator, Compactor/Self-Propelled Compactor, Elevator (one drum or buck hoist), Elevator (when used to hoist building material), Finish Machine, Firemen & Hoist (one drum), Flexplane, Forklift (regardless of lift height), Form Grader, Joint Sealing Machine, Outboard Motor Boat, Power Sweeper (riding type), Roller (rock), Ross Carrier, Skid Mounted or Trailer Mounted Concrete Pump, Skid Steer Machine with all attachments, Switchman or Brakeman, Throttle Valve Person, Tractair and Road Widening Trencher, Tractor (50 H.P. or over), Truck Crane Oiler, Tugger, Welding Machine, Well Points, and Whirley Oiler.

BASE RATE 21.18
FRINGE BENEFITS 12.40

All off road material handling equipment, including Articulating Dump Trucks, Greaser on grease facilities servicing heavy equipment.

BASE RATE 21.56
FRINGE BENEFITS 12.40

TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES

OPERATING ENGINEERS: (continued)
Bituminous Distributor, Burlap and Curing Machine, Cement Gun, Concrete Saw, Conveyor, Deckhand Oiler, Grout Pump, Hydraulic Post Driver, Hydro Seeder, Mud Jack, Oiler, Paving Joint Machine, Power Form handling equipment, Pump, Roller (Earth), Steerman, Tamping Machine, Tractor (under 50 H.P.) and Vibrator.

BASE RATE 20.92
FRINGE BENEFITS 12.40

Cranes - with booms 150 ft. and over (including jib), and where the length of the Boom in combination with the length of the piling equals or exceeds 150 ft. - $1.00 above Group 1 rate.

Employees assigned to work below ground level are to be paid 10% above basic wage rate. This does not apply to open cut work.

Fringe benefit amounts are applicable for all hours worked except when otherwise noted.

These rates are listed pursuant to the Kentucky Determination No. CR-06-I HWY dated July 10, 2007 and/or Federal Decision No.KY20080025 dated February 8, 2008, modification #0 dated February 8, 2008, modification #1 dated April 4, 2008, modification #2 dated June 6, 2008, modification #3 dated July 4, 2008, modification #4 dated July 25, 2008, modification #5 dated August 1, 2008, modification #6 dated August 15, 2008, modification #7 dated September 5, 2008 and modification #8 dated October 3, 2008.

TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES

No laborer, workman or mechanic shall be paid at a rate less than that of a Journeyman except those classified as bona fide apprentices.

Apprentices or trainees shall be permitted to work as such subject to Administrative Regulations adopted by the Commissioner of Workplace Standards. Copies of these regulations will be furnished upon request from any interested person.

Before using apprentices on the job the contractor shall present to the Contracting Officer written evidence of registration of such employees in a program of a State apprenticeship and training agency approved and recognized by the U. S. Bureau of Apprenticeship and Training. In the absence of such a State agency, the contractor shall submit evidence of approval and registration by the U. S. Bureau of Apprenticeship and Training.

The contractor shall submit to the Contracting Officer, written evidence of the established apprenticeship-journeyman ratios and wage rates in the project area, which will be the basis for establishing such ratios and rates for the project under the applicable contract provisions.

TO: EMPLOYERS/EMPLOYEES

PREVAILING WAGE SCHEDULE:

The wages indicated on this wage schedule are the least permitted to be paid for the occupations indicated. When an employee works in more than one classification, the employer must record the number of hours worked in each classification at the prescribed hourly base rate.

OVERTIME:

Overtime is to be paid after an employee works eight (8) hours a day or forty (40) hours a week, whichever gives the employee the greater wages. At least time and one-half the base rate is required for all overtime. A laborer, workman or mechanic and an employer may enter into a written agreement or a collective bargaining agreement to work more than eight (8) hours a calendar day but not more than ten (10) hours a calendar day for the straight time hourly rate. Wage violations or questions should be directed to the designated Engineer or the undersigned.

Steve Waddle, Director
Division of Construction Procurement
Frankfort, Kentucky 40622

PART IV

INSURANCE

INSURANCE

The Contractor shall carry the following insurance in addition to the insurance required by law:

1. Contractor's Public Liability Insurance not less than $100,000.00 for damages arising out of bodily injuries to or death to one person. Not less than $300,000.00 for damages arising out of bodily injuries to or death to two or more persons.

2. Contractor's Property Damages Liability Insurance. Not less than $100,000.00 for all damages arising out of injury or destruction of property in any one accident. Not less than $300,000.00 for all damages during the policy period.

3. Contractor's Protective Public Liability and Property Damage Insurance. The contractor shall furnish evidence with respect to operations performed for him by subcontractors that he carries in his own behalf for the above stipulated amounts.

4. The insurance required above must be evidenced by a Certificate of Insurance and this Certificate of Insurance must contain one of the following statements:

   a. "policy contains no deductible clauses."

   b. "policy contains _____ (amount) deductible property damage clause but company will pay claim and collect the deductible from the insured."

5. WORKMEN'S COMPENSATION INSURANCE. The contractor shall furnish evidence of coverage of all his employees or give evidence of self-insurance by submitting a copy of a certificate issued by the Workmen's Compensation Board.

PART V

BID ITEMS

CONTRACT ID: 083244
COUNTY: OHIO
PROPOSAL: 092GR08R077

PAGE: 1
LETTING: 10/31/08
CALL NO: 408

LINE NO	ITEM	DESCRIPTION	APPROXIMATE UNIT QUANTITY	UNIT PRICE	AMOUNT
	SECTION 0001	ROADWAY			
0010	00001	DGA BASE	780.000 TON		
0020	00190	LEVELING & WEDGING PG64-22	2,492.000 TON		
0030	00221	CL2 ASPH BASE 0.75D PG64-22	285.000 TON		
0040	00301	CL2 ASPH SURF 0.38D PG64-22	9,784.000 TON		
0050	02562	SIGNS	1,150.000 SQFT		
0060	02650	MAINTAIN & CONTROL TRAFFIC KY 110	(1.00) LS		
0070	02650	MAINTAIN & CONTROL TRAFFIC KY 1544	(1.00) LS		
0080	02650	MAINTAIN & CONTROL TRAFFIC KY 369	(1.00) LS		
0090	02650	MAINTAIN & CONTROL TRAFFIC KY 69	(1.00) LS		
0100	02650	MAINTAIN & CONTROL TRAFFIC KY 764	(1.00) LS		
0110	02676	MOBILIZATION FOR MILL & TEXT KY 369	(1.00) LS		
0120	02676	MOBILIZATION FOR MILL & TEXT KY 764	(1.00) LS		
0130	02677	ASPHALT PAVE MILLING & TEXTURING	68.000 TON		
0140	06427	TRENCHING	10,350.000 LF		
0150	06510	PAVE STRIPING-TEMP PAINT-4 IN	9,382.000 LF		
0160	06514	PAVE STRIPING-PERM PAINT-4 IN	93,803.000 LF		
0170	10020NS	FUEL ADJUSTMENT	17,172.000 DOLL	1.00	17,172.00
0180	10030NS	ASPHALT ADJUSTMENT	30,261.000 DOLL	1.00	30,261.00
	SECTION 0002	DEMOBILIZATION			
0190	02569	DEMOBILIZATION	LUMP		
		TOTAL BID			