YELLOW ALTERNATIVE
WIDEN WEST CENTERLINE
SEGMENTS 3–4

Focus Group 1 Columbia Bypass to Adair/Taylor County Line		Segment 4 Cane Valley Road to County Line	
		Green	Yellow
Right of Way Impacts			
Relocations (Resid.)	(No.)	2	0
Relocations (Comm.)	(No.)	2	0
Parcels w/out Access	(No.)	0	0
Major R/W Impact*	(No.)	10	2
Farmland R/W Impact	(Ac)	13.0	15.5
Right of Way	Ac	16.0	16.0
Cemeteries Affected	(No.)	0	0
		Green	Yellow
Environmental Impacts			
Blue Line Stream	Ft	420	330
Wildlife Management Area	Ac	0.0	0.0
Corps Property Affected	Ac	0.0	0.0
Historic Sites	(No.)	0	0
Community Resources**	(No.)	0	0
		Green	Yellow
Design Items			
Maximum Grade (Mainline)	%	4.27%	4.27%
Frontage Roads	(No.)	6	6
		Green	Yellow
Cost Estimates			
Right of Way Cost	$	$2,360,000	$960,000
Utility Relocation Cost	$	$1,868,500	$1,919,500
Construction Cost	$	$6,879,400	$6,924,600
Total Cost	**$**	**$11,107,900**	**$9,804,100**
Public Meeting Preferences (March 2009)	(No.)	Green	Yellow

* Proposed R/W within 50' of house, or proposed R/W > 33% of lot, or loss of major structure
** Public facilities such as churches, parks, schools, etc.
Least Desirable Quantity

GREEN ALTERNATIVE
WIDEN WEST CENTERLINE
SEGMENTS 3–4

Focus Group 1 Columbia Bypass to Adair/Taylor County Line		Segment 3 South of Cane Valley School Road to Cane Valley Road		
		Red	Green	Yellow
Right of Way Impacts				
Relocations (Resid.)	(No.)	1	0	1
Relocations (Comm.)	(No.)	0	0	0
Parcels w/out Access	(No.)	1	0	0
Major R/W Impact*	(No.)	7	8	8
Farmland R/W Impact	(Ac)	12.5	10.0	9.0
Right of Way	Ac	17.0	15.5	16.0
Cemeteries Affected	(No.)	0	0	0
		Red	Green	Yellow
Environmental Impacts				
Blue Line Stream	Ft	410	440	470
Wildlife Management Area	Ac	0.0	0.0	0.0
Corps Property Affected	Ac	0.0	0.0	0.0
Historic Sites	(No.)	2	2	2
Community Resources**	(No.)	0	0	0
		Red	Green	Yellow
Design Items				
Maximum Grade (Mainline)	%	3.97%	3.97%	3.97%
Frontage Roads	(No.)	2	2	2
		Red	Green	Yellow
Cost Estimates				
Right of Way Cost	$	$1,220,000	$930,000	$1,160,000
Utility Relocation Cost	$	$1,436,700	$1,487,500	$1,594,700
Construction Cost	$	$5,256,650	$5,256,850	$5,653,150
Total Cost	**$**	**$7,913,350**	**$7,674,350**	**$8,407,850**
Public Meeting Preferences (March 2009)	(No.)	Red	Green	Yellow
		7	10	6

* Proposed R/W within 50' of house, or proposed R/W > 33% of lot, or loss of major structure
** Public facilities such as churches, parks, schools, etc.
Least Desirable Quantity
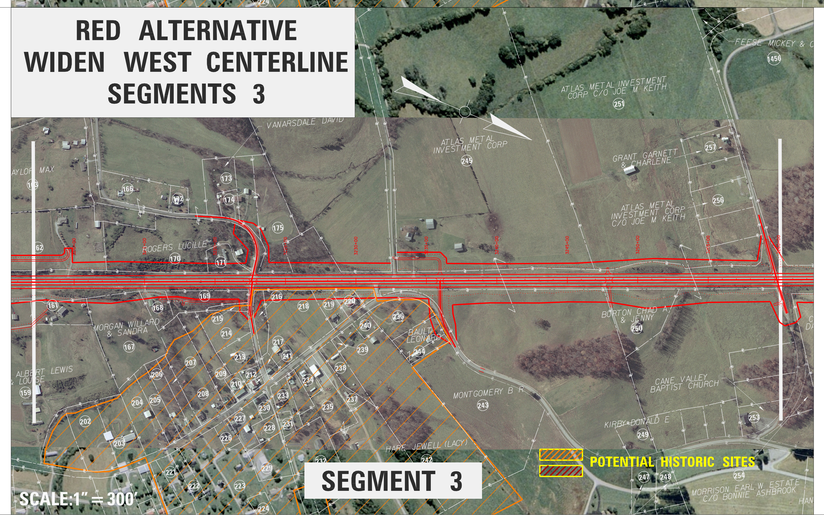
RED ALTERNATIVE
WIDEN WEST CENTERLINE
SEGMENTS 3