



CALL NO. 332

CONTRACT ID. 072918

MCCRACKEN COUNTY

FED/STATE PROJECT NUMBER FE02 073 0060 B000005N

LETTING DATE: April 20, 2007

Sealed Bids will be received in the Division of Construction Procurement and/or the Auditorium located on the 1st floor of the Transportation Cabinet Office Building until 10:00 AM EASTERN DAYLIGHT TIME April 20, 2007. Bids will be publicly opened and read at 10:00 AM EASTERN DAYLIGHT TIME.

REQUIRED BID PROPOSAL GUARANTY: Not less than 5% of the total bid.

(Check guaranty submitted: Cashier's Check Certified Check Bid Bond)

BID BONDS WHEN SUBMITTED WILL BE RETAINED WITH THE PROPOSAL

DBE General Plan Included

BID

PROPOSAL ISSUED TO: _____

SPECIMEN

Address

City

State

Zip

TABLE OF CONTENTS

PART I	SCOPE OF WORK
	<ul style="list-style-type: none">• PROJECT(S), COMPLETION DATE(S), & LIQUIDATED DAMAGES• CONTRACT NOTES• PROJECT IDENTIFICATION SIGN• TRAFFIC CONTROL PLAN• BRIDGE RESTORATION & WATERPROOFING W/ CONCRETE OVERLAYS• REPLACING EXPANSION DAMS AND/OR INSTALLING ARMORED EDGES• ELIMINATING TRANSVERSE JOINTS ON BRIDGES• CONTRACT COMPLETION DATE AND LIQUIDATED DAMAGES• SKETCH MAP(S)• ELEVATION AND TYPICAL SECTION OF BRIDGE• EXPANSION DAM DETAIL - 2"• CURB SECTION - 2" JOINT• EXPANSION DAM DETAIL - 4"• CURB SECTION - 4" JOINT• ELIMINATE TRANSVERSE JOINT DETAIL• ELIMINATE TRANSVERSE JOINT - CURB SECTION
PART II	SPECIFICATIONS AND STANDARD DRAWINGS
	<ul style="list-style-type: none">• SUPPLEMENTAL SPECIFICATIONS• 2004 STANDARD DRAWINGS THAT APPLY
PART III	EMPLOYMENT, WAGE AND RECORD REQUIREMENTS
	<ul style="list-style-type: none">• LABOR AND WAGE REQUIREMENTS• EXECUTIVE BRANCH CODE OF ETHICS• KENTUCKY EQUAL EMPLOYMENT OPPORTUNITY ACT OF 1978• PROJECT WAGE RATES
PART IV	INSURANCE
PART V	STATEMENT OF INCOMPLETED WORK
PART VI	BID ITEMS
PART VII	CERTIFICATION
	<ul style="list-style-type: none">• PROVISIONS RELATED TO SENATE BILL 258 (1994)

- NON-COLLUSION CERTIFICATION
- CERTIFICATION OF BID PROPOSAL

PART I
SCOPE OF WORK

CONTRACT ID - 072918

ADMINISTRATIVE DISTRICT - 01

PROJECT(S) IDENTIFICATION AND DESCRIPTION:

COUNTY - MCCRACKEN

FE02 073 0060 B000005N

SMITHLAND TO PADUCAH WESTBOUND BRIDGE OVER CLARKS RIVER AT MP 18.592. BRIDGE DECK
OVERLAY.

GEOGRAPHIC COORDINATES LATITUDE 37[^]02'36" LONGITUDE 88[^]32'51"

AVERAGE DAILY TRAFFIC - 25500 AVERAGE MAINLINE WIDTH - 30.0 FEET

COMPLETION DATE(S) AND LIQUIDATED DAMAGES ESTABLISHED:

COMPLETION DATE - November 15, 2007

APPLIES TO ENTIRE CONTRACT

SEE SPECIAL NOTES FOR LIQUIDATED DAMAGES

20 WORKING DAYS

APPLIES TO B000005N

SEE SPECIAL NOTES FOR LIQUIDATED DAMAGES

CONTRACT NOTES

PROPOSAL ADDENDA

All addenda to this proposal must be incorporated into the proposal when the bid is submitted to the Kentucky Department of Highways. Failure to use the correct and most recent bid sheet(s) may result in the bid being rejected.

BID SUBMITTAL

Bidder must use the Department's Highway Bid Program available on the Internet web site of the Department of Highways, Division of Construction Procurement. (www.transportation.ky.gov/contract)

The Bidder must download the bid items created from the web site to prepare a bid proposal for submission to the Department. The bidder must insert the completed bid item sheets printed from the Program into the bidder's proposal and submit with the disk created by said program.

JOINT VENTURE BIDDING

Joint Venture bidding is permissible. However, both companies MUST purchase a bidding proposal. Either proposal may be submitted but must contain the company names and signatures of both parties where required. A joint bid bond of 5% may be submitted for both companies or each company may submit a separate bond of 5%.

UNDERGROUND FACILITY DAMAGE PROTECTION

The contractor is advised that the Underground Facility Damage Protection Act of 1994, became law January 1, 1995. It is the contractor's responsibility to determine the impact of the act regarding this project, and take all steps necessary to be in compliance with the provision of the act.

SPECIAL NOTE FOR PROJECT IDENTIFICATION SIGNS

When directed by the Engineer, install Project Identification Signs furnished by the Department at each end of the project. The signs furnished by the Department will be approximately 44" X 72" or 72" X 120" aluminum sign blanks with standard color reflective sheeting with the applicable county and project names affixed. The Engineer will determine the size and location of the signs, if any, to be used on the project(s) at the time of construction.

Pick up the signs to be furnished by the Department at the District Traffic Operations Facility. Furnish posts and hardware for mounting the signs. Install the signs at locations determined by the Engineer. Maintain the signs during the duration of the project. Upon completion of the work, remove the signs and return them to District Traffic Operations Facility. Retain possession of the posts and hardware.

The Department will measure installation of the Project Identification Signs in individual units, Each. Payment at the contract unit price Each shall be full compensation for all labor, materials, equipment, and incidentals required for picking up, installing, maintaining, and returning the project identification signs furnished by the Department.

<u>Code</u>	<u>Pay Item</u>	<u>Pay Unit</u>
20588NC	Install Project Identification Signs	Each

SPECIAL NOTE FOR TRAFFIC CONTROL ON BRIDGE REPAIR CONTRACTS

TRAFFIC CONTROL GENERAL

Except as provided herein, traffic shall be maintained in accordance with the 2004 Standard Specifications, Section 112. Except for the roadway and traffic control bid items listed, all items of work necessary to maintain and control traffic will be paid at the lump sum bid price to "Maintain and Control Traffic".

Contrary to Section 106.01, traffic control devices used on this project may be new, or used in like new condition, at the beginning of the work and maintained in like new condition until completion of the work.

SIGNS

Contrary to Section 112.04.02, only long term signs (signs intended to be continuously in place for more than 3 days) will be measured for payment; short term signs (signs intended to be left in place for 3 days or less) will not be measured for payment but will be incidental to Maintain and Control Traffic. In addition to signage required by Standard Drawing TTC-120, additional signs for side roads and "reduced speed" (45 mph) in the construction zone shall be field located by the Engineer if conditions warrant. Additional signage required for side road(s) and "reduced speed" is approx. 128 ft² (8 – 4'x4' signs)

TEMPORARY PAVEMENT STRIPING

Skip lines through the length of the tapers for lane closures and other striping as directed by the Engineer shall be temporarily covered with 8" black removable tape. Permanent removal of all other pavement striping for traffic control shall be considered incidental to Maintain and Control Traffic in accordance with Section 112.04.15. Temporary pavement striping shall be paid only once per course in accordance with Section 112.04.08. The Contractor shall replace any temporary striping that becomes damaged or fails to adhere to the pavement before dark on the day of notification. Liquidated damages shall be assessed the Contractor at a rate of \$500 per day for failing to replace temporary striping within this time limit.

LANE CLOSURE

Standard Drawing TTC-120, "Lane Closure Multi-Lane Highway Case II" shall be used for traffic control on the project unless otherwise noted. Buffer zone as shown on Standard Drawing TTC-120 shall be 150 ft minimum. Use of an Arrow Panel is required. Contrary to Standard Drawing TTC-120, temporary barrier shall be "water-filled barrier" in lieu of Temporary Barrier Type 9T.

WATER-FILLED BARRIER

Furnish water-filled polyethylene barrier known as "Triton Barrier TL-3" manufactured by Energy Absorption Systems, Inc (ph. 312-467-6750) or "Roadguard Safety Barrier with 350 Highway Kit TL-3" (known formerly as Guardian barrier with 350 Highway Kit) as manufactured by Traffic Safety Devices Inc. (ph. 215-635-3770) or approved equal. Payment of the contract unit price per linear foot for "Water-Filled Barrier" shall be full

compensation for furnishing, installing, maintaining, adjusting alignment as needed, moving the barrier as required for construction phasing, removing the barrier wall when no longer needed, and all incidental items necessary to complete the work including but not limited to cleaning or replacing sections of the barrier with poor reflectivity or leakage as directed by the Engineer.

PROJECT PHASING & CONSTRUCTION PROCEDURES

Maintain, as a minimum one lane of traffic at all times in accordance with Standard Drawing No. TTC-120 and the attached detail drawings. The clear lane width required is:

<u>Structure</u>	<u>Clear Lane Width</u>
FE02 073 0060 B00005N	12 feet

Lane closures will not be permitted on these days:

- Easter Weekend (Thursday-Sunday)
- Memorial Day Weekend (Friday-Monday)
- Independence Day, Wednesday July 4th, 2007
- Labor Day Weekend (Friday-Monday)
- Thanksgiving Day Weekend (Thursday-Sunday)
- Christmas/New Years (December 24-January 2)

SPECIAL NOTE FOR BRIDGE RESTORATION AND WATERPROOFING WITH CONCRETE OVERLAYS

- I. DESCRIPTION.** *Perform all work in accordance with the Kentucky Transportation Cabinet, Department of Highway's 2004 Standard Specifications for Road and Bridge Construction and applicable Supplemental Specifications, the Standard Drawings, this Note, and the attached detail drawings. Section references are to the Standard Specifications.*

This work consists of the following: (1) Furnish all labor, materials, tools, and equipment; (2) Machine preparation of existing slab or remove the existing overlay; (3) Place new concrete overlay and epoxy-sand slurry in accordance with Section 606; (4) Maintain and control traffic; and (5) Any other work specified as part of this contract.

All construction will be in accordance with Section 606 unless otherwise specified.

II. MATERIALS.

- A. Latex Concrete.** See Section 606.03.17.
- B. Low Slump Concrete.** See Section 606.03.18.
- C. Class "M" Concrete.** Use either "M1" or "M2". See Section 601.
- D. Epoxy-Sand Slurry.** See Section 606.03.18

III. CONSTRUCTION.

- A. Remove Existing Overlay.** In addition to Section 606.03.03, totally remove the existing concrete overlay by grinding or scarifying the deck to a depth slightly below or equal to the original bridge slab surface. In areas where the existing overlay has been removed, additional machine preparation of the existing slab is NOT required. When removal of an existing overlay is a pay item, no payment will be allowed for "Machine Preparation of Existing Slab". This work is incidental to the pay item "Removal of Existing Overlay – Square Yard".
- B. Overlay.** Place new overlay in accordance with Section 606.
- C. Surface Texturing.** Texture the concrete surface of the overlay in accordance with Section 609.03.10. The minimum thickness of the textured overlay shall be as follows:
 - Latex Cement Concrete – 1 ¼"**
 - Low Slump Concrete – 1 ¾"
- D. Approach Pavement Repair.** The Contractor shall repair any damage to the approach pavement due to the construction. A new asphalt surface wedge for all approaches to each structure in this project shall be placed and compacted to the satisfaction of the Engineer prior to allowing traffic back on a section of bridge deck overlay. No additional payment will be allowed for this work, as it will be considered incidental to the pay item "EXPANSION JOINT REPLACEMENT – 2" ”.

- IV. MEASUREMENT.** See Section 606.

V. PAYMENT. See Section 606.

SPECIAL NOTE FOR REPLACING EXPANSION DAMS AND/OR INSTALLING ARMORED EDGES FOR CONCRETE ON BRIDGES

I. DESCRIPTION. Perform all work in accordance with the Kentucky Transportation Cabinet, Department of Highway's 2004 Standard Specifications for Road and Bridge Construction and applicable Supplemental Specifications, the Standard Drawings, this Note, and the attached detail drawings. Section references are to the Standard Specifications.

This work consists of the following: (1) Furnish all labor, materials, tools, and equipment; (2) Remove existing concrete and expansion device(s) and/or bridge ends; (3) Install armored edges and new concrete as specified and in accordance with the attached detail drawings; (4) Install new joint seals (where required); (5) Maintain and control traffic; and (6) Any other work specified as part of this contract.

II. MATERIALS.

- A. Class "M" Concrete.** Use either "M1" or "M2". See Section 601.
- B. Structural Steel.** Use new, commercial grade steel suitable for welding. The Engineer will base acceptance on visual inspection. See Standard Drawing BJE-001, current edition.
- C. Stud Anchors.** The armored edge stud anchors are $\frac{3}{4}$ " x 6" embedded stud shear connectors conforming to ASTM A108, Grade 1015 (Nelson Studs or equal).
- D. Steel Reinforcement.** Use Grade 60. See Section 602.
- E. Epoxy Bond Coat.** See Section 511.
- F. Neoprene Joint Sealers (Compression Seals).** See attached detail drawings and Section 807.
- G. Silicone Rubber Sealant.** See Section 807.
- H. Neoprene Strip Seals.** See attached detail drawings and Section 807.

III. CONSTRUCTION.

A. Remove Existing Materials. Remove the existing expansion dam/bridge end/deck and specified areas of concrete as shown on the attached sketches. Remove debris and/or expansion joint filler as directed by the Engineer. Dispose of all removed material entirely away from the job site. This work is incidental to the contract unit price for "Expansion Joint Replacement" or "Armored Edge for Concrete".

Clean and leave all existing steel reinforcement encountered in place.

B. Place New Concrete and Armored Edges. After all specified existing materials have been removed; place new armored edges to match the grade of the proposed overlay or to match the original grade (See attached detail drawings). Place the new Class "M" concrete to the scarified grade and finish to receive the new overlay or place the new Class "M" concrete to the original grade and finish with broom strokes drawn transversely from curb to curb in accordance with the attached detail drawings.

All new structural steel shall be cleaned and painted with two coats of commercial primer paint red orange in color, except that steel surfaces to come in contact with concrete are not to be painted.

Blast clean all areas of existing concrete and structural steel to come in contact with new concrete until free of all laitance and deleterious substances immediately prior to the placement of the Class "M" Concrete. The surface areas of existing concrete to come in contact with the new Class "M" Concrete are to be coated with an epoxy bond coat immediately prior to placing new concrete in accordance with Section 511. The interfaces of the new and old concrete shall be as nearly vertical and horizontal as possible.

- C. Additional Steel Reinforcement.** Furnish for replacement, as directed by the Engineer, 450 linear feet of steel reinforcing bars ½" diameter by 20' lengths. Place these bars in areas deemed by the Engineer to require additional reinforcement. Field cutting and bending is permitted. Do not place any additional steel reinforcement above the height of the top row of Nelson Studs on the armored edges. Ensure that all exposed steel reinforcement is tied in accordance with Section 602.03.04 prior to pouring the new Class "M" concrete. Deliver unused bars to the Local County Maintenance Barn. Payment will be made in accordance with Section 602.
- D. Stage Construction.** Installation of concrete and armored edges in two (or more if specified) stages is necessary. Join the armored edges at or near the centerline of the roadway or lane line, field weld and grind smooth.
- E. Preformed Neoprene Joint Seal.** Place the preformed joint seal in one continuous, unbroken length. Place neoprene compression seals as recommended by the manufacturer and in accordance with Section 609.03.04 (D). Place neoprene strip seals as recommended by the manufacturer and in accordance with Section 609.03.04 (E), except that shop drawings will not be required.
- F. Silicone Rubber Sealant.** Place the silicone sealant as recommended by the manufacturer and in accordance with Section 609.03.04 (C).
- G. Shop Plans.** Shop plans will not be required. The Contractor is responsible for obtaining field measurements and supplying properly sized materials to complete the work.

IV MEASUREMENT.

- A. Expansion Joint Replacement - 2" or 4".** The Department will measure the quantity in linear feet from gutterline to gutterline along the centerline of the joint.
- B. Armored Edge for Concrete.** The Department will measure the quantity in linear feet from gutterline to gutterline along the face of the bridge end.
- C. Steel Reinforcement.** See Section 602.

V. PAYMENT.

- A. Expansion Joint Replacement - 2" or 4".** Payment at the contract unit price per linear foot is full compensation for removing specified existing materials, furnishing and installing the new armored edges, concrete, neoprene joint seal,

and all incidental items necessary to complete the work (except the overlay material) within the specified pay limits as specified by this note and as shown on the attached detail drawings.

B. Armored Edge for Concrete. Payment at the contract unit price per linear foot is full compensation for removing specified existing materials, furnishing and installing the new armored edges, concrete and all incidental items necessary to complete the work (except the overlay material) within the specified pay limits as specified by this note and as shown on the attached detail drawings.

C. Steel Reinforcement. See Section 602.

The Department will consider payment as full compensation for all work required by this note and the attached detail drawings.

SPECIAL NOTE FOR ELIMINATING TRANSVERSE JOINTS ON BRIDGES

I. DESCRIPTION. *Perform all work in accordance with the Kentucky Transportation Cabinet, Department of Highway's 2004 Standard Specifications for Road and Bridge Construction and applicable Supplemental Specifications, the Standard Drawings, this Note, and the attached detail drawings. Section references are to the Standard Specifications.*

This work consists of the following: (1) Furnish all labor, materials, tools, and equipment; (2) Remove existing concrete to eliminate the transverse joint; (3) Install additional steel reinforcement and new concrete as specified and in accordance with the attached detail drawings; (4) Maintain and control traffic; and (5) Any other work specified as part of this contract.

II. MATERIALS.

Class "M" Concrete. Use either "M1" or "M2". See Section 601.

Steel Reinforcement. Use Grade 60. See Section 602.

C. Epoxy Bond Coat. See Section 511.

III. CONSTRUCTION.

A. Remove Existing Materials. Remove the existing transverse joints, joint filler, and specified areas of concrete as shown on the attached detail drawings or as directed by the Engineer. Dispose of all removed material entirely away from the job site. This work is incidental to the contract unit price for "Eliminate Transverse Joint".

Clean and leave all existing steel reinforcement encountered in place. Damaged steel reinforcement will be repaired/replaced as directed by the Engineer at no additional cost to the Department.

B. Place New Concrete. After all specified existing materials have been removed, place new Class "M" Concrete to the scarified grade and finish to receive the new overlay as shown on the detail drawings.

On the curb and/or sidewalk if present, place the new concrete to original grade as shown on the detail drawings and finish to match the existing curb/sidewalk.

Blast clean all areas of existing concrete and structural steel that will come in contact with new concrete until free of all laitance and deleterious substances immediately prior to the placement of the Class "M" Concrete. The surface areas of existing concrete to come in contact with the new Class "M" Concrete are to be coated with an epoxy bond coat immediately prior to placing new concrete in accordance with Section 511. The interfaces of the new and old concrete shall be as nearly vertical and horizontal as possible.

C. Additional Steel Reinforcement. Furnish for this work, as directed by the Engineer, approximately 2907 linear feet of steel reinforcing bars ½” diameter by 2’- 10” lengths. Splice these bars to the existing longitudinal reinforcement in the deck and/or curb/sidewalk in the areas of removed concrete to tie the slabs together as shown on the attached detail drawings. In addition to the longitudinal splice reinforcement furnished under this section, furnish for replacement, as directed by the Engineer, 1500 linear feet of steel reinforcing bars ½” diameter by 20’ lengths. Place these bars in areas deemed by the Engineer to require additional reinforcement. Field cutting and bending is permitted. Ensure that all exposed steel reinforcement is tied in accordance with Section 602.03.04 prior to pouring the new Class “M” concrete. Deliver unused bars to the Local County Maintenance Barn. Payment will be made in accordance with Section 602.

IV MEASUREMENT.

- A. Eliminate Transverse Joint.** The Department will measure the quantity in linear feet from gutterline (inside face of curb) to gutterline (inside face of curb) along the theoretical centerline of the transverse joint being eliminated.
- B. Steel Reinforcement.** See Section 602.

V. PAYMENT.

- A. Eliminate Transverse Joint.** Payment at the contract unit price per linear foot is full compensation for removing and disposing of the specified existing materials, furnishing and installing the concrete, and all incidental items necessary to complete the work (except the overlay material) within the specified pay limits as specified by this note and as shown on the attached detail drawings.
- B. Steel Reinforcement.** See Section 602.

The Department will consider payment as full compensation for all work required by this note and the attached detail drawings.

SPECIAL NOTE FOR CONTRACT COMPLETION DATE AND LIQUIDATED DAMAGES ON BRIDGE REPAIR CONTRACTS

- I. COMPLETION DATE.** The Contractor has the option of selecting the starting date for this Contract. Once selected, notify the Department in writing of the date selected at least two weeks prior to beginning work. All work is to be completed in the 2007 construction season by November 15, 2007. An allotted number of working days are assigned to each structure in this contract as shown below.

<u>STRUCTURE</u>	<u>NUMBER OF WORKING DAYS</u>
FE02 073 0060 B00005N	20

Contrary to Section 108.07.02, the Engineer will begin charging working days for a structure on the day the Contractor starts work or sets up traffic control on that particular structure.

- II. LIQUIDATED DAMAGES.** Liquidated damages will be assessed the Contractor in accordance with the Transportation Cabinet, Department of Highway's 2004 Standard Specifications for Road and Bridge Construction, Section 108.09, when either the allotted number of working days or the November 15, 2007 date is exceeded.


Contrary to the Standard Specifications, liquidated damages will be assessed the Contractor during the months of December, January, February and March when the contract time has expired on any individual bridge or bridges. Contract time will be charged during these months.

All construction must be completed in accordance with the weather limitations specified in Section 606 and/or Section 601 as applicable. No extension of Contract time will be granted due to inclement weather or temperature limitations that occur due to starting work on the Contract or a structure late in the construction season.

McCracken County




B00005
US 60 WBL
over Clarks River
Bridge Overlay

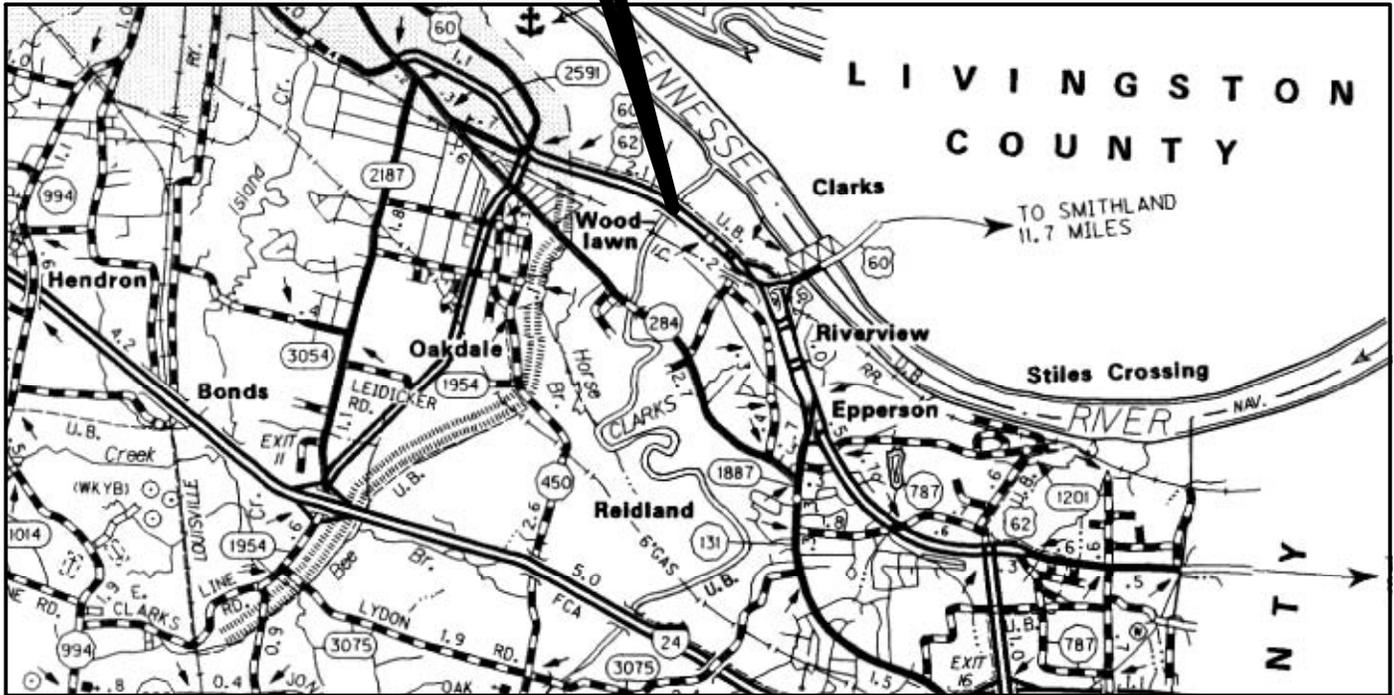

Approximate Location Information

Latitude: N37°2.6'
Longitude: W88°32.9'
MP 18.592


US 60 WBL over CLARK'S RIVER

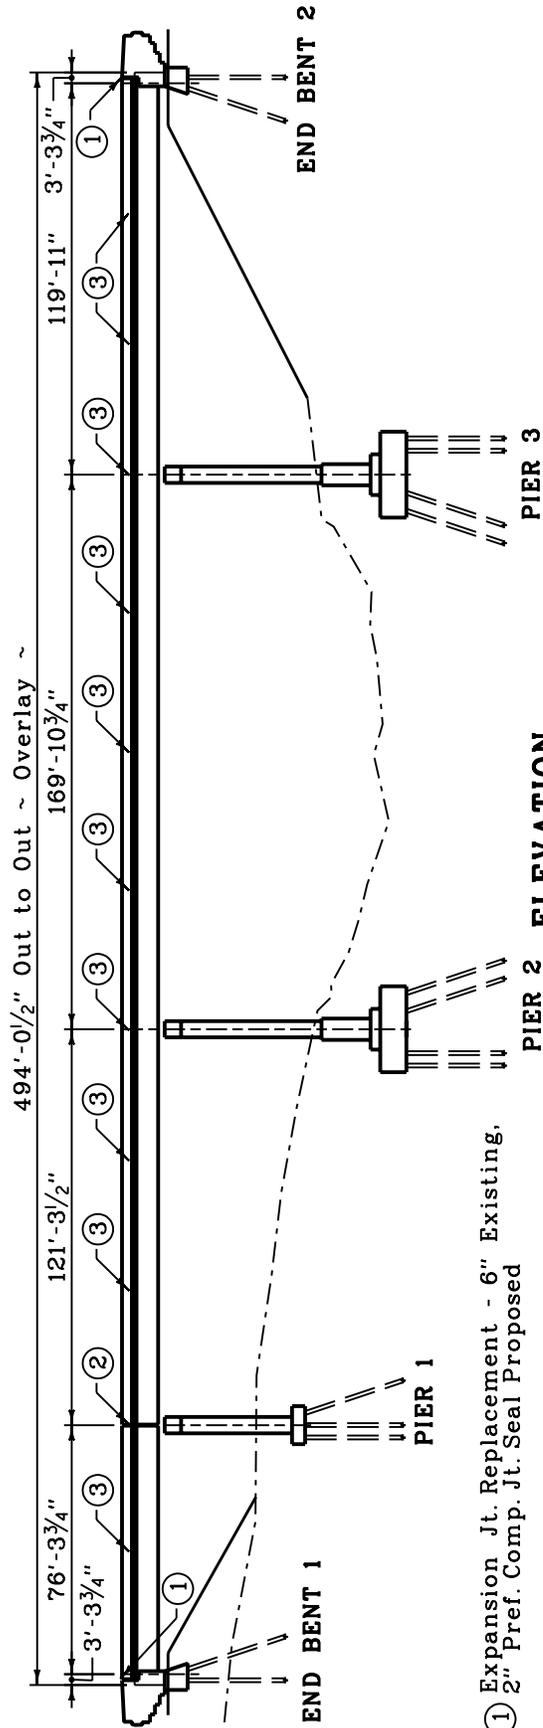

- ① Expansion Jt. Replacement - 6" Existing,
- ② 2" Pref. Comp. Jt. Seal Proposed
- ③ Expansion Jt. Replacement - 6" Existing
- ④ 4" Pref. Comp. Jt. Seal Proposed
- ⑤ Eliminate Transverse Jt. (10 locations)

ELEVATION


0° Skew
Not to Scale

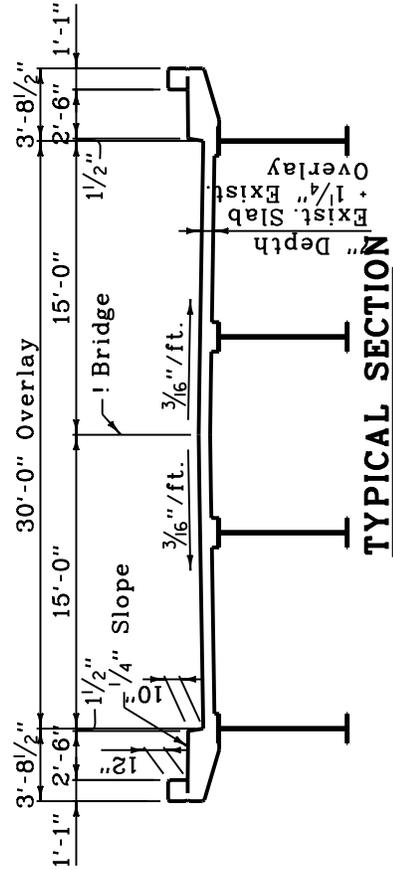


TYPICAL SECTION

EXPANSION DAM DETAIL

@ END BENTS

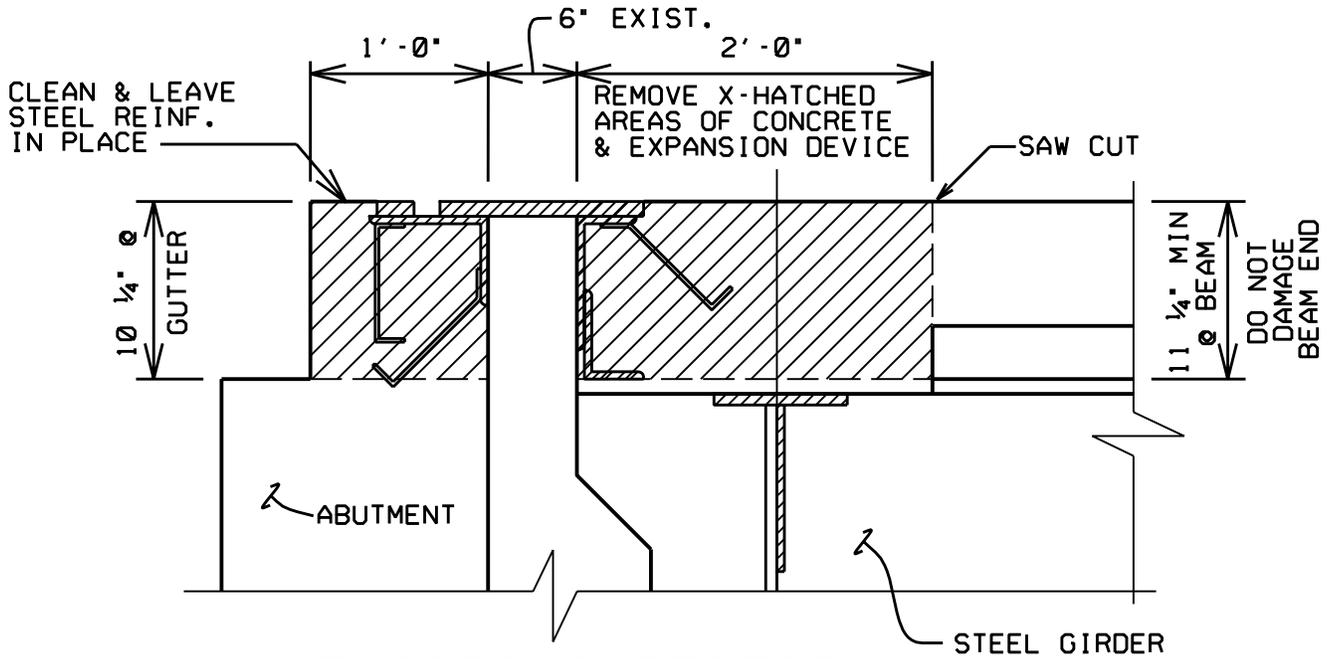


EXISTING SECTION

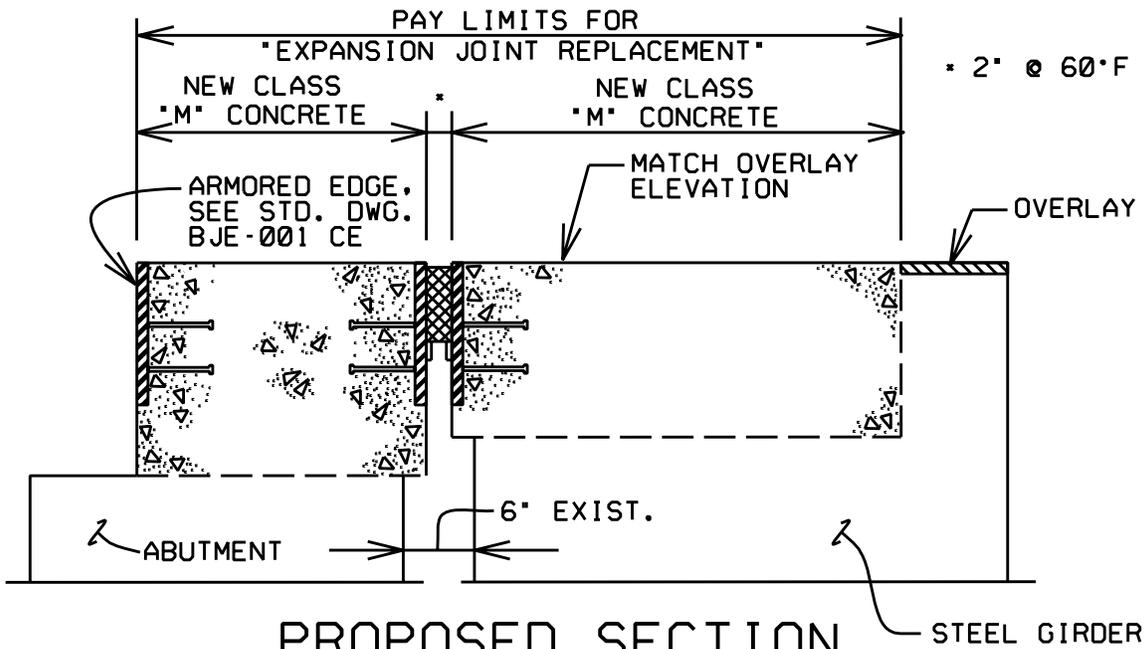


PROPOSED SECTION

CURB SECTION @ ENDBENTS

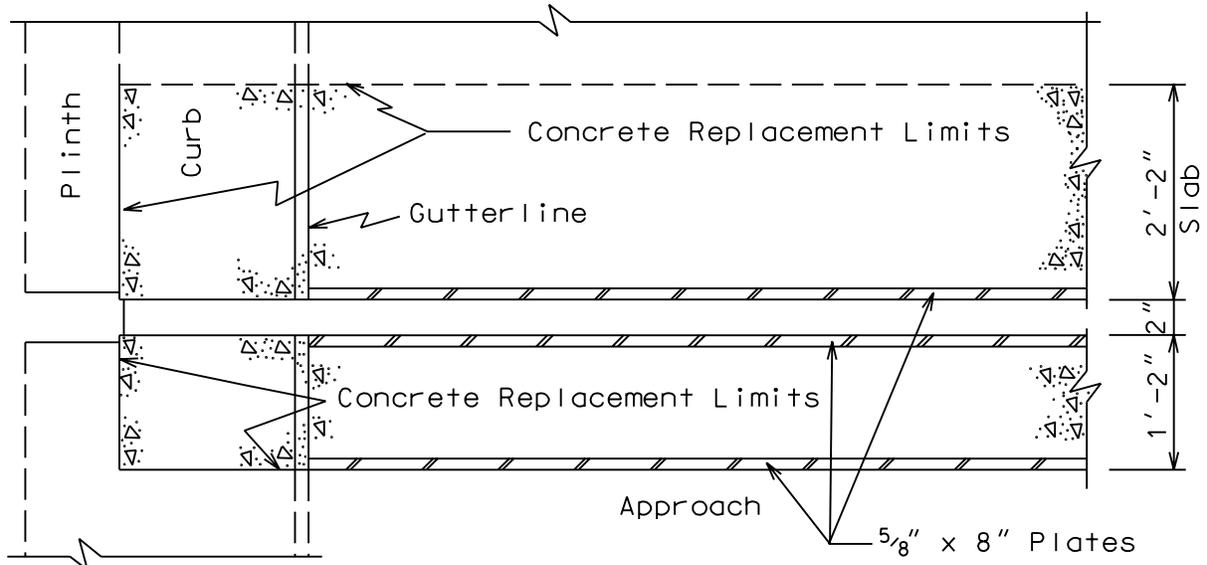


PLAN VIEW @ CURB

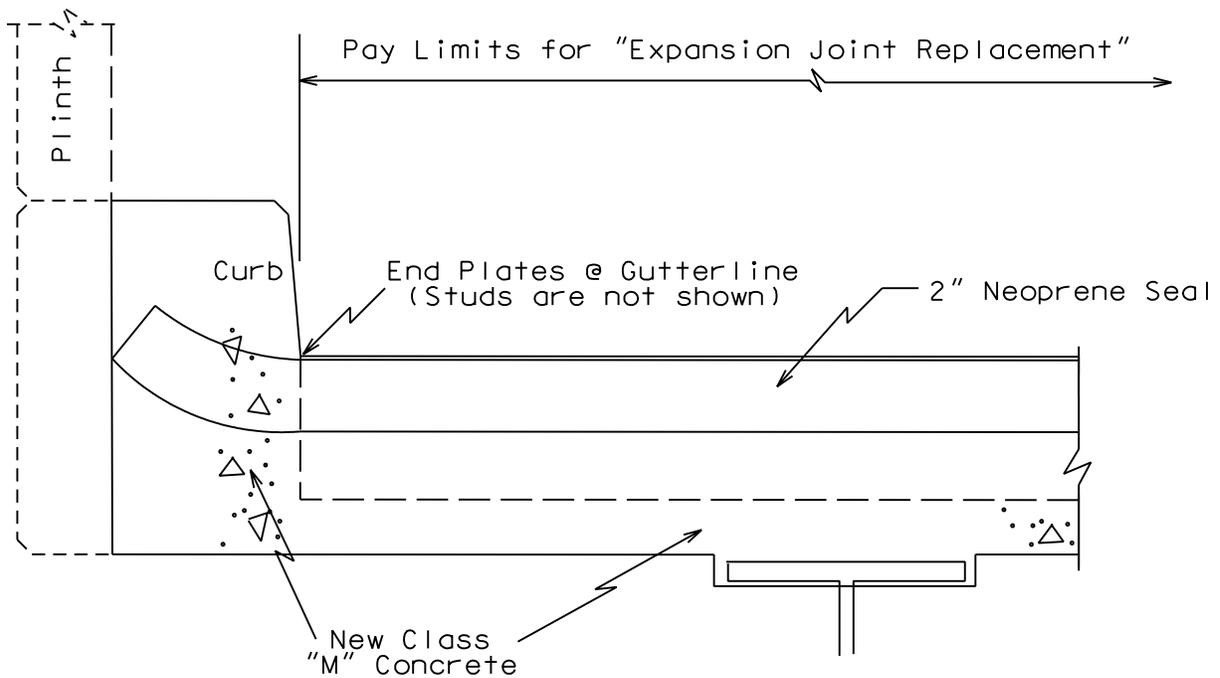


PROPOSED SECTION @ CURB

EXPANSION DAM DETAIL @ PIER 1

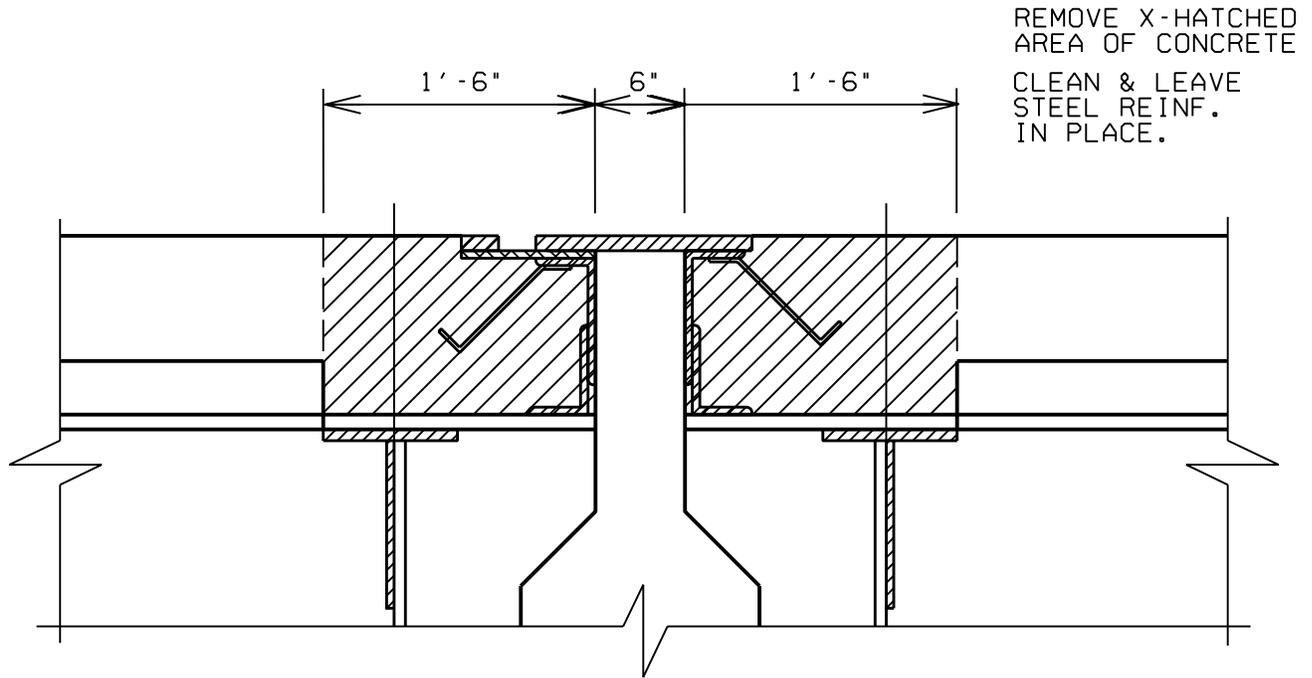


EXISTING SECTION

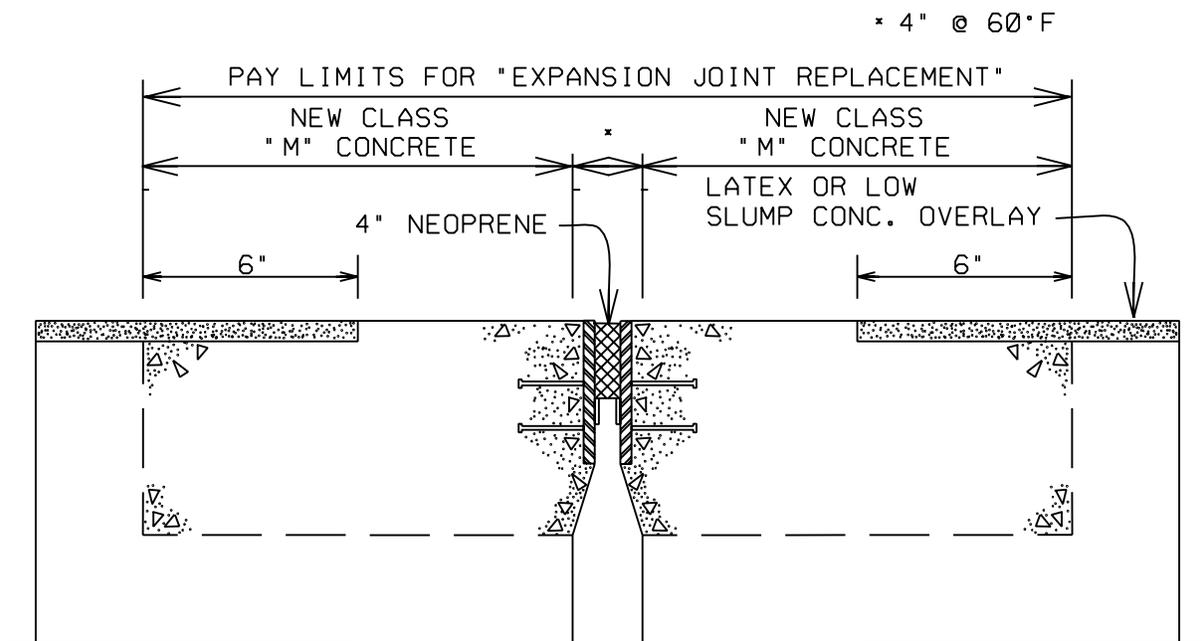


PROPOSED SECTION

CURB SECTION @ PIER


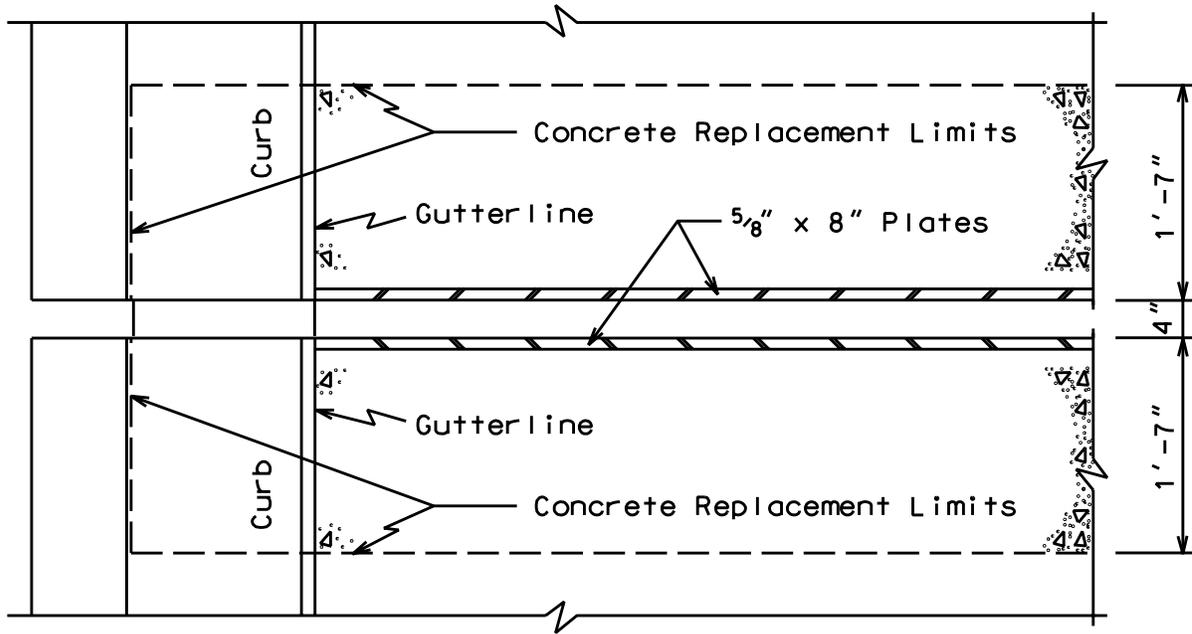


PLAN VIEW @ CURB

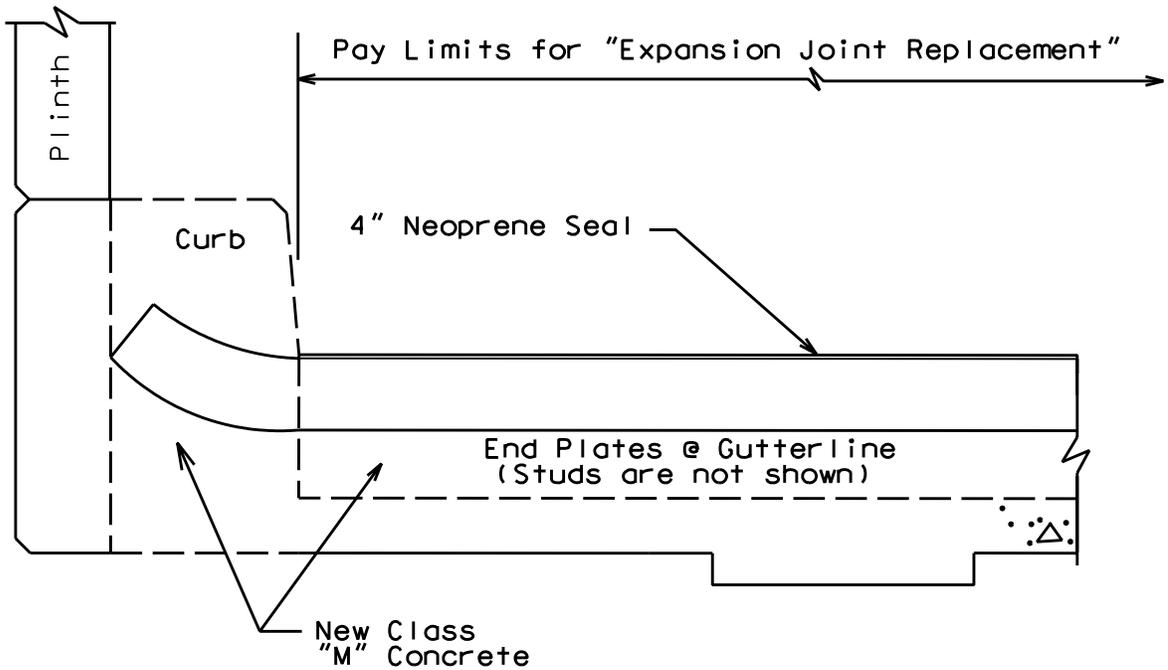


PROPOSED SECTION @ CURB

ELIMINATE TRANSVERSE JOINT

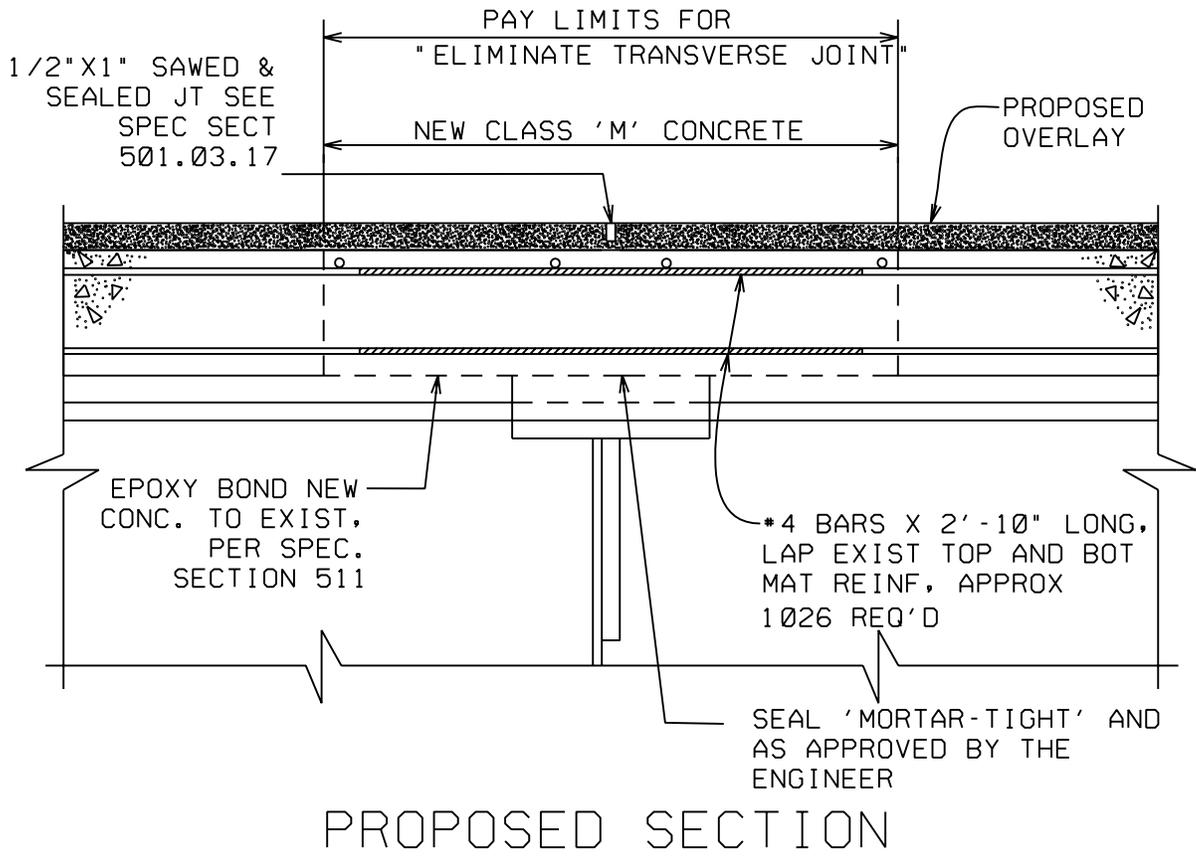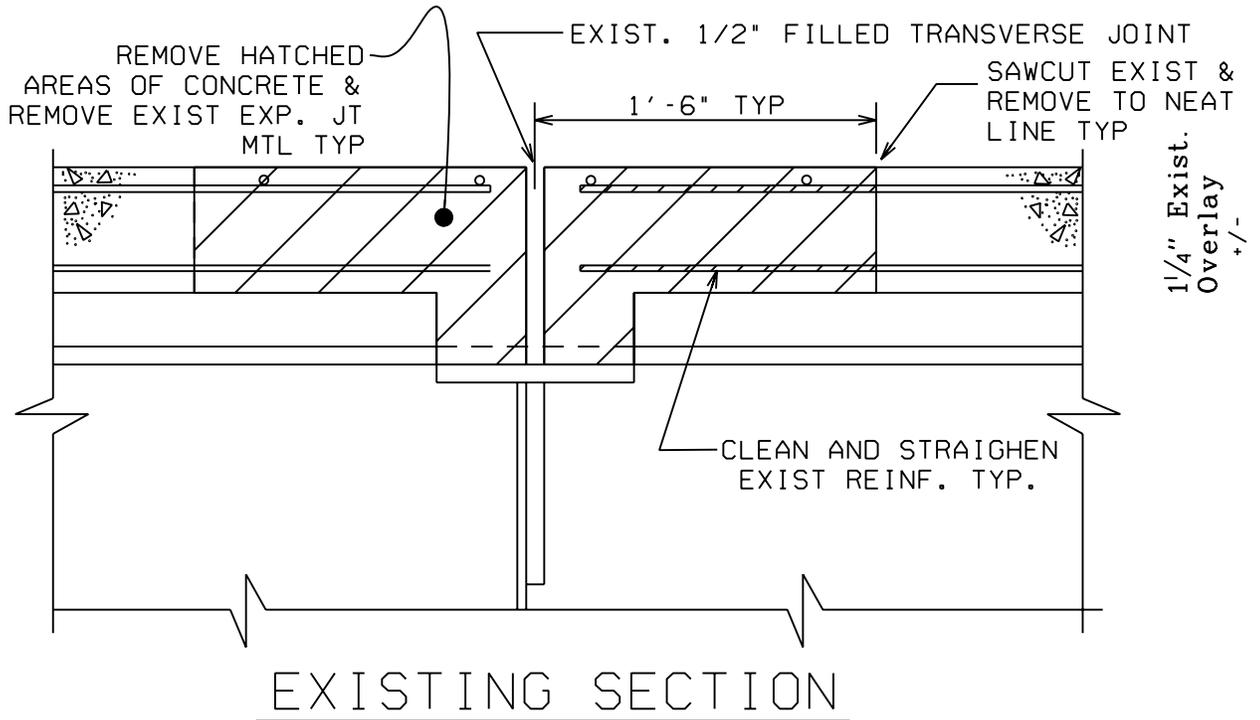

ELIMINATE TRANSVERSE JOINT CURB DETAIL

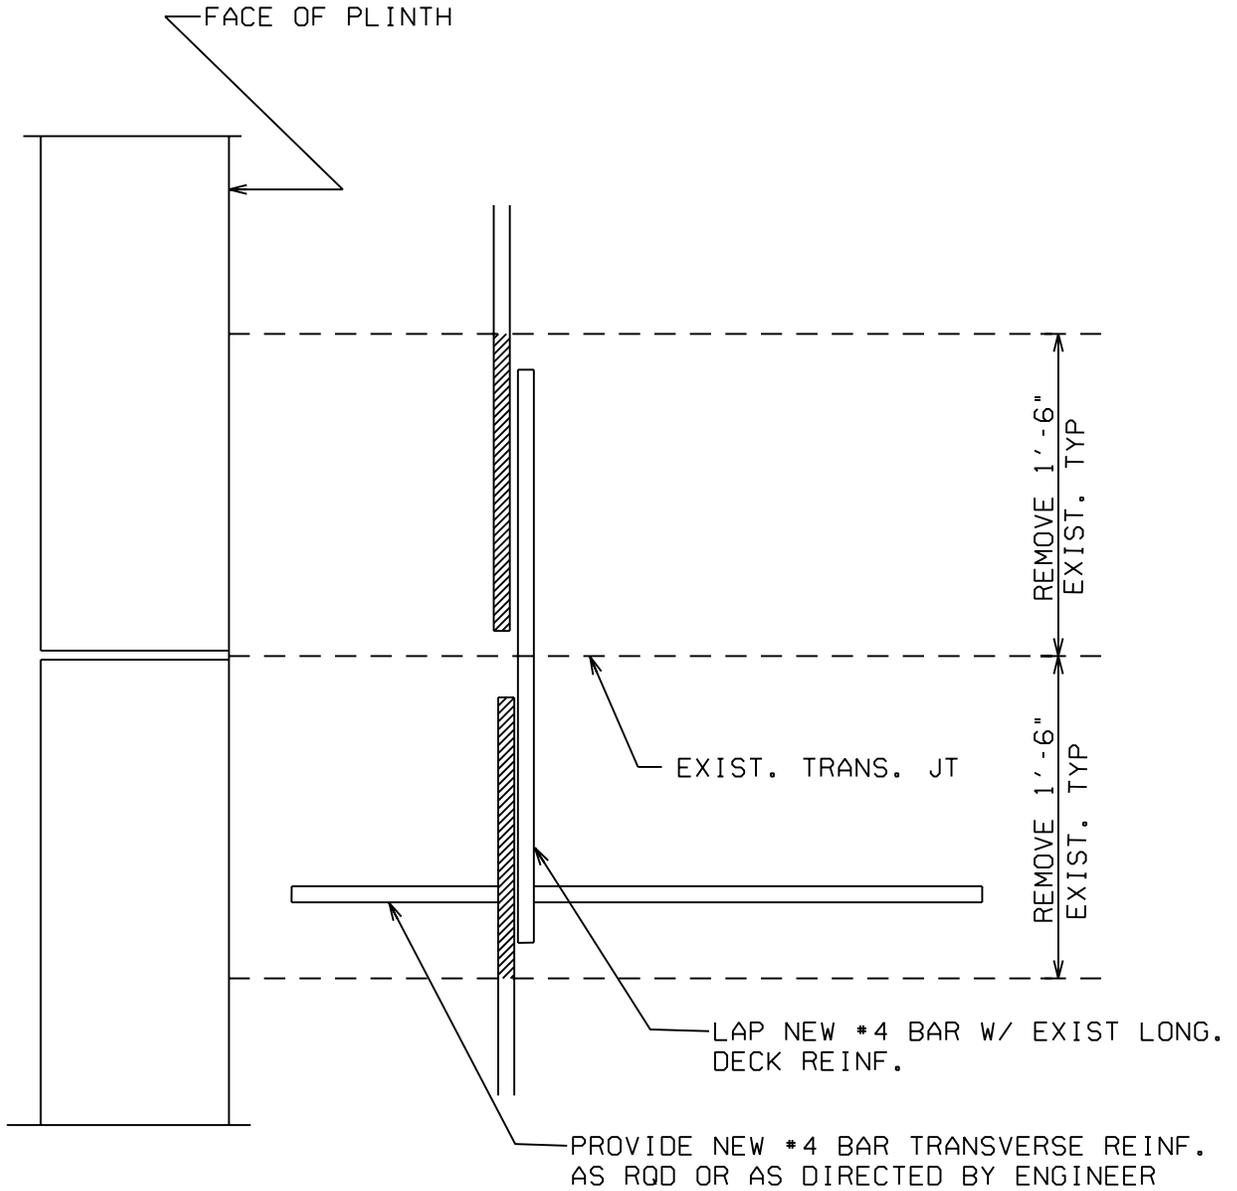

PART II

SPECIFICATIONS AND STANDARD DRAWINGS

**Supplemental Specifications to The Standard Specifications
for Road and Bridge Construction, 2004 Edition**
(Effective with the January 19, 2007 Letting)

SUBSECTION: 105.07 COOPERATION WITH UTILITIES. REVISION: In the last paragraph, replace “KRS 367 Sections 1 through 10” with “KRS 367.4901 through 367.4917”
SUBSECTION: 108.01 SUBCONTRACTING OF CONTRACT. REVISION: Replace the second and third sentence of the first paragraph with the following: When the Engineer gives such consent, the Engineer will allow the Contractor to subcontract a portion, but the Contractor must perform with his own organization work amounting to no less than 30 percent of the total Contract cost. The Department will not allow any subcontractor to exceed the percentage to be performed by the Contractor and will require the Contractor to maintain a supervisory role over the entire project.
SUBSECTION: 109.07 PRICE ADJUSTMENT. REVISION: Replace the section with the following: 109.07 PRICE ADJUSTMENTS. Due to the fluctuating costs of petroleum products, the Department will adjust the compensation of specified liquid asphalt items and diesel fuel in contracts when contract quantity thresholds are met. 109.07.01 Liquid Asphalt. The Department will compare the Kentucky Average Price Index (KAPI), for the month that the Contract is let, to the index for the month that the Contractor places the material on the project to determine the percent change. When the original contract quantity for asphalt items is equal to or greater than 3,000 tons and when the average price of the liquid asphalt products increases or decreases more than 5 percent, the Department will adjust the Contractor’s compensation. The KAPI is calculated monthly using the average price, per ton at the terminal, from the active suppliers of liquid asphalt. <u>Adjustable Contract Items:</u> <ul style="list-style-type: none">• Asphalt Curing Seal• Asphalt Material for Prime• Asphalt Base, All Classes• Asphalt Binder• Asphalt Surface, All Classes• Sand Asphalt Surface• Asphalt Open-Graded Surface• Asphalt Seal Coat• Asphalt Mixture for Leveling and Wedging• Drainage Blanket - Type II - Asphalt The Department will determine the price adjustment using the following formulas: <u>When PC is greater than PL</u> Asphalt Price Adjustment = $(Q \times A)/100 \times PL \times [(PC-PL)/PL - 0.05]$ <u>When PC is less than PL</u> Asphalt Price Adjustment = $(Q \times A)/100 \times PL \times [(PC-PL)/PL + 0.05]$ Where: Q = Tons of material or mixture placed each month. A = Percent of material or mixture that is asphalt. PL = KAPI for the month that the Contract is let. PC = KAPI for the month that the Contractor places the material or mixture. The job-mix formula for asphalt base, binder, and surface mixtures determines “A”, which is the percent of asphalt. For recycled mixtures, the Department will determine the adjustment for the new asphalt cement only. The Department will consider materials for prime and seal as 100 percent asphalt.

**Supplemental Specifications to The Standard Specifications
for Road and Bridge Construction, 2004 Edition**
(Effective with the January 19, 2007 Letting)

Revision
Continued

109.07.02 Fuel. The Department will adjust the Contractor's compensation when the average price of diesel fuel increases or decreases more than 5 percent and the original Contract quantity for the item on which the fuel is consumed is equal to or greater than the threshold quantities listed in the following table.

<u>Item</u>	<u>Threshold Quantity</u>	<u>Fuel/Work</u>
Roadway Excavation	10,000 cubic yards	0.25
Embankment-in-Place	10,000 cubic yards	0.25
Borrow Excavation	10,000 cubic yards	0.25
DGA Base or Crushed Stone Base	5,000 tons	0.52
Stabilized Aggregate Base	5,000 tons	0.52
Drainage Blanket, Cement Treated or Untreated	5,000 tons	0.52
Drainage Blanket, Asphalt Treated	5,000 tons	3.00
Crushed Sandstone Base (Cement Treated)	5,000 tons	0.52
Hot-Mixed Asphalt Mixtures for Pavements or Shoulders	3,000 tons ⁽¹⁾	3.00
PCC Pavement, Base, or Shoulders	2,000 square yards ⁽²⁾	0.14

⁽¹⁾Total of all hot mixed asphalt Contract items.

⁽²⁾Total of all JPC pavement, JPC shoulder, and PCC base, Contract items.

The Department will determine the price adjustment using the following formulas:

When PC is greater than PL

$$\text{Fuel Price Adjustment} = Q \times F \times PL \times [(PC-PL)/PL - 0.05]$$

When PC is less than PL

$$\text{Fuel Price Adjustment} = Q \times F \times PL \times [(PC-PL)/PL + 0.05]$$

Where:

Q = Quantity for applicable item placed or performed that month.

F = The fuel to work unit ratio for each applicable item.

PL = Average reseller price of diesel fuel, excluding taxes, discounts, and superfund line items, in the Kentucky region for the month that the Contract is let.

PC = Average reseller price of diesel fuel, excluding taxes, discounts, and superfund line items, in the Kentucky region for the month that the Contractor uses the fuel on the project.

109.07.03 Payments and Deductions. When thresholds are met, the Department will adjust the Contractor's compensation for each eligible pay item, paid or deducted, monthly.

If later price decreases indicate that the Department made an overpayment, the Department will withhold the overpayment from succeeding pay estimates on the project, or the Contractor shall immediately refund the over payment to the Department.

When the Contractor places materials during any month after the month that the Contract time (including all approved time extensions) expires, the Department will use the average price for the month that the Contractor places the material or the average price for the last month of the Contract time; whichever is least.

The Department will not grant a time extension for any overrun in the Contract amount due to payments made according to this section. The Department will not make any additional compensation due to adjustments made according to this section.

The Department will adjust the Contractor's compensation on the following months pay estimate and on the final pay estimate. The Department will make the final adjustment of the Contractor's compensation on the final estimate for the project.

**Supplemental Specifications to The Standard Specifications
for Road and Bridge Construction, 2004 Edition**
(Effective with the January 19, 2007 Letting)

SUBSECTION:	110.01 MOBILIZATION.
REVISION:	Replace the third paragraph with the following: Do not bid an amount for Mobilization that exceeds 5 percent of the sum of the total amounts bid for all items in the Bid Proposal, excluding Mobilization, Demobilization, and contingent amounts established for adjustments and incentives. The Department will automatically adjust any bids in excess of this amount to 5 percent for bid comparisons. The Department will base the award on the maximum allowable bid of 5 percent. If any errors in unit bid prices for other Contract items in a Contractor's Bid Proposal are discovered after bid opening and such errors reduce the total amount bid for all other items, excluding Mobilization, Demobilization, and contingent amounts established for adjustments and incentives, so that the percent bid for Mobilization is larger than 5 percent, the Department will adjust the amount bid for Mobilization to 5 percent of the sum of the corrected total bid amounts.
SUBSECTION:	110.02 DEMOBILIZATION.
REVISION:	Replace the first sentence of the third paragraph with the following: Do not bid an amount for Demobilization that is less than 1.5 percent of the sum of the total amounts bid for all other items in the Bid Proposal, excluding Mobilization, Demobilization, and contingent amounts established for adjustments and incentives.
SUBSECTION:	206.03.03 Compaction.
REVISION:	Replace "KM 64-412" with "KM 64-002"
SUBSECTION:	212.03.03 Permanent Seeding and Protection.
PART:	B) Procedures for Permanent Seeding.
REVISION:	Add the following after the fourth sentence: Unless the Engineer directs otherwise, track all slopes 3:1 or greater. Ensure that tracking is performed up and down and not across.
SUBSECTION:	213.03.01 Best Management Practices (BMP).
REVISION:	Replace the third sentence of the first paragraph with the following: Ensure that the BMP provides storage for 3,600 cubic feet of water per surface acre disturbed.
SUBSECTION:	213.03.03 Inspection and Maintenance
REVISION:	Replace both "0.1-inch" references with "0.5-inch".
SUBSECTION:	213.03.05 Temporary Control Measures.
PART:	B) Silt Checks.
REVISION:	B) Silt Checks. Use one of the following types: 1) Silt Check Type II - Crushed stone such as cyclopean stone riprap, quarry run stone, or other size material approved by the Engineer, dumped in place and shaped to the configuration required. 2) Silt Check Type III - Blasted or broken rock dumped in place and shaped to the configuration required. Remove and properly dispose of sediment deposited at silt checks as necessary. When no longer needed, remove the silt checks and dispose of surplus materials as excavated materials according to Section 204. Seed and protect the entire area disturbed, as directed. Do not leave silt checks in place after completion of the project unless allowed by the Engineer or specified in the Plans.
SUBSECTION:	213.03.05 Temporary Control Measures.
PART:	G) Temporary Mulch.
REVISION:	Replace the last sentence with the following: Place temporary mulch to an approximate 2-inch loose depth (2 tons per acre) and apply tackifier.
SUBSECTION:	213.04.15 Temporary Silt Ditch.
REVISION:	Replace with the following: The Department will measure the quantity in linear feet.

**Supplemental Specifications to The Standard Specifications
 for Road and Bridge Construction, 2004 Edition
 (Effective with the January 19, 2007 Letting)**

SUBSECTION:	213.04 MEASUREMENT.
REVISION:	Add the following Subsection: 213.04.24 Clean Temporary Silt Ditch. The Department will measure the quantity in linear feet along the ditch line.
SUBSECTION:	213.05 PAYMENT.
REVISION:	Add the following lines: 20594 Temporary Silt Ditch Linear Foot 20601 Clean Temporary Silt Ditch Linear Foot
SUBSECTION:	303.03.01 Mixture
PART:	C) Cement Treated Mixture.
REVISION:	Delete the "For asphalt pavements" from the second paragraph.
SUBSECTION:	303.03.01 Mixture
PART:	C) Cement Treated Mixture.
REVISION:	Delete requirement "2".
SUBSECTION:	402.03.02 Acceptance.
PART:	D) Testing Responsibilities.
NUMBER:	4) Density.
REVISION:	Replace the first sentence of the third paragraph with the following: For surface mixtures placed on driving lanes and ramps, furnish 2 cores per subplot to the nearest laboratory facility (Contractor or Department lab) for density determination by the Engineer.
SUBSECTION:	402.03.02 Acceptance.
PART:	H) Unsatisfactory Work.
NUMBER:	1) Based on Lab Data.
REVISION:	Replace the "AASHTO MP2" references in the second paragraph with "AASHTO M 323".
SUBSECTION:	402.04 MEASUREMENT.
REVISION:	Replace the last sentence with the following: The Department will not measure construction of rolled rumble strips or pavement wedge texturing for payment and will consider them incidental to the asphalt mixture.
SUBSECTION:	402.04.01 Weight.
REVISION:	Replace first sentence of the second paragraph with the following: The Department will determine the bulk, oven-dry specific gravity for the fine and coarse aggregates according to KM64-605 and AASHTO T 85, respectively.
SUBSECTION:	402.04.02 Thickness on New Construction.
REVISION:	Delete the third paragraph and add the following at the end of the subsection: The Department will not measure initial thickness check coring or coring of corrective work for payment and will consider it incidental to the asphalt mixture.

**Supplemental Specifications to The Standard Specifications
for Road and Bridge Construction, 2004 Edition
(Effective with the January 19, 2007 Letting)**

SUBSECTION:	402.05.02												
PARTS:	Lot Pay Adjustment Schedule, Compaction Option A, Base and Binder Mixtures Lot Pay Adjustment Schedule, Compaction Option A, Surface Mixtures Lot Pay Adjustment Schedule, Compaction Option B Mixtures												
REVISION:	Replace the VMA table with the following:												
<table border="1" style="margin: auto; border-collapse: collapse;"> <thead> <tr> <th colspan="2">VMA</th> </tr> <tr> <th style="width: 50%;">Pay Value</th> <th style="width: 50%;">Deviation From Minimum</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1.00</td> <td style="text-align: center;">≤ 0.5 below min. VMA</td> </tr> <tr> <td style="text-align: center;">0.95</td> <td style="text-align: center;">0.6-1.0 below min.</td> </tr> <tr> <td style="text-align: center;">0.90⁽²⁾</td> <td style="text-align: center;">1.1-1.5 below min.</td> </tr> <tr> <td style="text-align: center;">⁽¹⁾/₍₂₎</td> <td style="text-align: center;">> 1.5 below min.</td> </tr> </tbody> </table>		VMA		Pay Value	Deviation From Minimum	1.00	≤ 0.5 below min. VMA	0.95	0.6-1.0 below min.	0.90 ⁽²⁾	1.1-1.5 below min.	⁽¹⁾ / ₍₂₎	> 1.5 below min.
VMA													
Pay Value	Deviation From Minimum												
1.00	≤ 0.5 below min. VMA												
0.95	0.6-1.0 below min.												
0.90 ⁽²⁾	1.1-1.5 below min.												
⁽¹⁾ / ₍₂₎	> 1.5 below min.												
SUBSECTION:	403.03.03 Preparation of Mixture.												
PART:	A) Mixture Composition.												
REVISION:	Replace the “AASHTO MP2” reference in the first paragraph with “AASHTO M 323”. From the aggregate requirements list, delete 3) Type C.												
SUBSECTION:	403.03.03 Preparation of Mixture.												
PART:	C) Mix Design Criteria.												
REVISION:	Replace the “AASHTO MP2” references with “AASHTO M 323”. Replace the “AASHTO PP28” references in the second paragraph with “AASHTO R 35”.												
SUBSECTION:	403.03.03 Preparation of Mixture.												
PART:	C) Mix Design Criteria.												
NUMBER	1) Preliminary Mix Design.												
REVISION:	Add the following footnote to the table and associate it with the ESAL’s field “<0.3”: * For CL1 ASPH SURF 0.38D PG64-22 only.												
SUBSECTION:	403.03.06 Thickness Tolerances.												
PART:	B) New Construction.												
REVISION:	Replace the first paragraph with the following: Under the Engineer’s supervision, perform coring for thickness checks according to KM 64-420, as soon as practical after completion of all, or a major portion, of the asphalt base. The Engineer will measure the cores. Fill all core holes either with compacted asphalt mixture or non-shrink grout. Complete all remedial overlay work before placing the final course.												

**Supplemental Specifications to The Standard Specifications
for Road and Bridge Construction, 2004 Edition
(Effective with the January 19, 2007 Letting)**

SUBSECTION: 403.03.08 Rumble Strips.
REVISION: Replace with the following:

403.03.08 Shoulder Rumble Strips and Pavement Wedge Texturing.

A) Shoulder Rumble Strips.

1) Interstates and Parkways. Construct sawed rumble strips on all mainline shoulders to the dimensions shown below. Do not place rumble strips on ramps.

2) Other Roads. Construct rolled rumble strips on shoulders of facilities with posted speed limits greater than 45 MPH. Unless specified in the plans or directed by the Engineer, do not construct rumble strips on facilities with posted speed limits of 45 MPH or less.


Construct rolled rumble strips on mainline shoulders to the dimensions shown below. On shoulders less than 3 feet wide, shorten the width and distance of the strips as the Engineer directs. Time the rolling operation so indentations are at the specified size and depth without causing unacceptable displacement of the asphalt mat. Correct unacceptable rolled rumble strips by sawing.

B) Pavement Wedge Texturing. Perform texturing on all pavement wedges constructed monolithically with the mainline or constructed using a surface mixture. When furnishing Asphalt Mixture for Pavement Wedge, binder, or a base mixture for the wedge, the Department will not require texturing.

Texture to the dimensions shown below. On wedges less than 3 feet, shorten the length and distance of the texturing as the Engineer directs. Time the rolling operation so indentations are at the specified size and depth without causing unacceptable displacement of the asphalt mat.



Place one foot out from the mainline pavement and to a width of 2 feet.



Place one foot out from the mainline pavement and to a width of 16 inches.

SUBSECTION: 403.04.03 Asphalt Mixtures.
REVISION: Replace the second sentence with the following:

The Department will not measure rolled rumble strips or pavement wedge texturing for payment and will consider them incidental to this bid item.

SUBSECTION: 403.04.07 Sawed Rumble Strips.
REVISION: Add the following subsection:

403.04.07 Sawed Rumble Strips. The Department will measure the quantity in linear feet. When rolled in rumble strips are specified, the Department will not measure sawed rumble strips for payment and will consider them incidental to the asphalt mixture.

**Supplemental Specifications to The Standard Specifications
for Road and Bridge Construction, 2004 Edition**
(Effective with the January 19, 2007 Letting)

SUBSECTION:	403.05 PAYMENT						
REVISION:	Add the following bid item:						
	<table border="0"> <thead> <tr> <th align="left"><u>Code</u></th> <th align="left"><u>Pay Item</u></th> <th align="left"><u>Pay Unit</u></th> </tr> </thead> <tbody> <tr> <td>20362</td> <td>Shoulder Rumble Strips – Sawed</td> <td>Linear Foot</td> </tr> </tbody> </table>	<u>Code</u>	<u>Pay Item</u>	<u>Pay Unit</u>	20362	Shoulder Rumble Strips – Sawed	Linear Foot
<u>Code</u>	<u>Pay Item</u>	<u>Pay Unit</u>					
20362	Shoulder Rumble Strips – Sawed	Linear Foot					
SUBSECTION:	501.03.20 Opening to Public Traffic.						
REVISION:	Delete the last sentence of the first paragraph.						
SUBSECTION:	501.03.21 Tolerance in Pavement Thickness.						
REVISION:	Add the following: Core the pavement as the Engineer directs.						
SUBSECTION:	501.04.06 Thickness.						
REVISION:	Add the following: The Department will not measure coring for payment and will consider it incidental to the concrete pay items.						
SUBSECTION:	502.03 CONSTRUCTION.						
PART:	C) Curing and Protecting Pavement.						
NUMBER:	3)						
REVISION:	Replace the last sentence with the following: The Department will allow permanent removal of the cover when the concrete attains the required opening strength of 3,000 psi.						
SUBSECTION:	502.03 CONSTRUCTION.						
PART:	D) Strength Testing and Opening to Traffic.						
NUMBER:	2) Testing.						
REVISION:	Replace the second paragraph with the following: When the average compressive strength is 3,000 psi, the Department will allow the pavement to be opened to traffic and will test the remaining sets of cylinders at the required age. When the average compressive strength is less than 3,000 psi at the required age, do not open the pavement to traffic until the pavement has been in place for 7 days. The Engineer may accept the pavement based on additional testing.						
SUBSECTION:	503.03.09 Ride Quality.						
REVISION:	Replace parts 5) and 6) with the following: 5) Perform corrective work to achieve the required IRI by regrinding the entire width of the traffic lane at areas having a high IRI. The Engineer may exclude pavement areas where grinding alone will not correct deficiency. 6) The Department will create a strip chart when the test results show that the IRI is greater than 60 or upon request for lower IRI values.						
SUBSECTION:	601.03.02 Concrete Producer Responsibilities.						
REVISION:	Replace the first sentence with the following: Use a concrete producer from the List of Approved Materials when the quantity of concrete delivered to the project in a plastic condition is 250 cubic yards or more. Ensure that the concrete producer complies with the following requirements:						

**Supplemental Specifications to The Standard Specifications
for Road and Bridge Construction, 2004 Edition**
(Effective with the January 19, 2007 Letting)

SUBSECTION: 601.03.02 Concrete Producer Responsibilities. PART: C) Quality Control. REVISION: Replace the first paragraph with the following: Take full responsibility for the batch weight calculations and quality control of concrete mixtures at the plant. Ensure that the Level II concrete technician is present when work is in progress and is responsible for inspecting trucks, batch weight calculations, monitoring batching, making mixture adjustments, reviewing the slump, air content and unit weight tests, and monitoring the concrete temperature, all to provide concrete to the project conforming to specifications. A Level I concrete technician is responsible for testing production material for slump, entrained air, unit weight and temperature of the mixture. Ensure the technician performs all sampling and testing according to the appropriate Kentucky Methods. Delete the third paragraph.
SUBSECTION: 601.03.02 Concrete Producer Responsibilities. PART: F) Records. REVISION: Retain all concrete technician records, test results and batch tickets pertaining to concrete produced for a Department project for at least 3 years after formal acceptance of the project. Make all records available to the Engineer and the Contractor on the project for review upon request.
SUBSECTION: 601.03.02 Concrete Producer Responsibilities. PART: G) Mix Designs. REVISION: Replace the last sentence of the first paragraph with the following: Before producing any concrete for the project, submit a proposed mixture design to the Engineer and obtain the District Materials engineer's or the Central Office Material's approval.
SUBSECTION: 601.03.02 Concrete Producer Responsibilities. PART: G) Mix Designs. NUMBER: 1) New Mixture Designs. REVISION: Replace the first sentence with the following: Base the proposed mix design on standard Department methods unless the District Materials Engineer, or Central Office Materials approves otherwise.
SUBSECTION: 601.03.02 Concrete Producer Responsibilities. PART: G) Mix Designs. NUMBER: 1) Changes in Approved Mix Designs. REVISION: Replace the second sentence with the following: The District Materials Engineer or Central Office Materials will provide an average value of the specific gravity aggregate absorption.
SUBSECTION: 601.03.02 Concrete Producer Responsibilities. PART: G) Mix Designs. NUMBER: 3) Changes in Approved Mix Designs. LETTER: g) REVISION: Replace the fourth and fifth sentence with the following: Central Office Materials will observe all phases of the trial batches. Have the producer submit a report containing mix proportions and test results for slump, air content, water/cement ratio, unit weight, and compressive strength for each trial batch to the Engineer for Central Office Materials review and approval.
SUBSECTION: 601.03.02 Concrete Producer Responsibilities. PART: G) Mix Designs. NUMBER: 2) Approval. REVISION: Replace the first sentence with the following: The District Materials Engineer or Central Office Materials will base approval of the mixture design on the following criteria:

**Supplemental Specifications to The Standard Specifications
for Road and Bridge Construction, 2004 Edition**
(Effective with the January 19, 2007 Letting)

SUBSECTION: PART: NUMBER: REVISION:	601.03.02 Concrete Producer Responsibilities. G) Mix Designs. 3) Changes in Approved Mix Designs. Replace the first sentence with the following: Do not change the source of supply of the mixture ingredients without the District Materials Engineer's or Central Office Materials written permission. Replace the third sentence with the following: Upon the District Materials Engineer's or Central Office Materials written approval, the Department will allow the use of aggregate from the new source.
SUBSECTION: PART: TABLE: REVISION:	601.03.03 Proportioning and Requirements. A) Concrete. INGREDIENT PROPORTIONS AND REQUIREMENTS FOR VARIOUS CLASSES OF CONCRETE Under Class of Concrete replace "A"AA ⁽⁹⁾ " with "AAA ⁽⁸⁾ "
SUBSECTION: PART: FOOTNOTE: REVISION:	601.03.03 Proportioning and Requirements. A) Concrete. (6) Add the following after the first sentence of the first paragraph: For products with voids, the slump may be increased to 7 inches. Replace the "0.3" requirement for Spring and Fall mix designs with "0.37".
SUBSECTION: PART: FOOTNOTE: REVISION:	601.03.03 Proportioning and Requirements. A) Concrete. (7) Replace with the following: The precast fabricator may increase the slump of Class A concrete to a maximum of 7 inches provided the fabricator uses a high range water reducer (Type F and G) and maximum water/cement ratio of 0.46.
SUBSECTION: PART: NUMBER: REVISION:	601.03.03 Proportioning and Requirements. E) Measuring. 3) Water. Delete the last sentence of the second paragraph.
SUBSECTION: PART: NUMBER: REVISION:	601.03.03 Proportioning and Requirements. E) Measuring. 4) Measuring Admixtures. Replace with the following: 4) Measuring Admixtures. Introduce liquid admixtures into the concrete batch along with, or as part of, the mixing water. Keep air-entraining admixtures completely separate from all other admixtures until introduction into the batch. Maintain and equip dispensing equipment to ensure no chlorides are introduced into any Department mix. Use approved dispensing equipment with a meter, gauge, or scale that can accurately be pre-set for the needed amount of admixture and can consistently deliver quantities of admixture to successive batches at any setting with satisfactory accuracy. The dispensing equipment must be visible to the batch operator if the actual dispensed amounts are not recorded on the computer batch ticket. Ensure admixture dispensers are inspected, calibrated and certified every 6 months. The Department may allow admixtures to be added, to the truck, at the project site provided the Engineer's approval is obtained first.

**Supplemental Specifications to The Standard Specifications
for Road and Bridge Construction, 2004 Edition
(Effective with the January 19, 2007 Letting)**

SUBSECTION:	601.03.04 Classes and Primary Uses.
REVISION:	Add the following part: R) Dry Cast. Precast units.
SUBSECTION:	601.03.05 Admixtures.
REVISION:	Replace the last sentence of the fourth paragraph with the following: Store admixtures where the liquid temperatures can be maintained between 32 and 110 °F.
SUBSECTION:	601.03.09 Placing Concrete.
PART:	D) Weather Limitations and Protection.
REVISION:	Delete the last sentence of paragraph two.
SUBSECTION:	605.03 CONSTRUCTION.
REVISION:	Insert the following sentence after the first sentence: Ensure all non-composite box beam concrete contains an approved corrosion inhibitor from the List of Approved Materials.
SUBSECTION:	605.03.03 Casting.
REVISION:	Delete the first sentence in the first paragraph. Add the following after the first sentence of the third paragraph: Do not vibrate Self-Consolidating Concrete (SCC).
SUBSECTION:	605.03.04 Tack welding.
REVISION:	Replace the first sentence with the following: When tack welding steel reinforcement, use ASTM A 706 steel and conform to the following conditions.
SUBSECTION:	605.03.04 Tack Welding.
NUMBER:	3)
REVISION:	Replace the first sentence with the following: Tack weld only at intersections of bars except do not tack weld in any bend or within 2 bar diameters of a bend.
SUBSECTION:	605.03.04 Tack Welding.
NUMBER:	5)
REVISION:	Replace the last sentence with the following: Each sample must meet the minimum requirement for elongation, ductility, tensile and yield strength of the bar stock.
SUBSECTION:	605.03.04 Tack Welding.
NUMBER:	6)
REVISION:	Delete the last sentence.
SUBSECTION:	605.03.04 Tack Welding.
REVISION:	Change footnote “(4) (d)” to “(5)”
SUBSECTION:	605.03.07 Removal of Forms and Surface Finish.
REVISION:	Add the following sentence before the last sentence of the paragraph: Finish dry cast products according to the Precast/Prestressed Concrete Manual.
SUBSECTION:	611.02.01 Concrete.
REVISION:	Replace with the following: Conform to Subsections 601.02 and 601.03 and the Precast/Prestress Concrete Manual.
SUBSECTION:	611.03.02 Precast Unit Construction.
REVISION:	Replace “AASHTO C 1433” with “ASTM C 1433”

**Supplemental Specifications to The Standard Specifications
for Road and Bridge Construction, 2004 Edition**
(Effective with the January 19, 2007 Letting)

<p>SUBSECTION: 611.03.02 Precast Unit Construction. NUMBER: 2) REVISION: Replace with the paragraph with the following:</p> <p>Mark all box culverts sections with the following information on the inside top of each section with letters no less than 2 inches high:</p> <ul style="list-style-type: none">a) Span, rise, maximum and minimum design earth cover, and KY Table 3.b) Date of manufacture.c) Name and trademark of the manufacturer. <p>For entrance and exit box sections, indent the required information. Mark interior sections by indenting or with waterproof paint.</p>
<p>SUBSECTION: 701.02.05 Backfill Materials. PART: A) Granular Backfill. NUMBER: 1) REVISION: Remove "A2" from the list of acceptable materials.</p>
<p>SUBSECTION: 701.03.03 Pipe Bedding. REVISION: Replace with the following:</p> <p>701.03.03 Pipe Bedding.</p> <p>A) Reinforced Concrete Pipe. Construct bedding according to the Standard Drawings and this section.</p> <ul style="list-style-type: none">1) Type 1 Installation. When working on a rock foundation, place bedding to a depth of 6 inches or equal to $Bc/12$, the pipe diameter in inches divided by 12, whichever is greater. For all other foundations, place a minimum of 4 inches of bedding. Shape the bedding to conform to the invert shape throughout the entire width and length of the proposed structure. Compact the bedding, but leave the center third of the pipe diameter ($Bc/3$) uncompacted. Place and compact additional bedding material in lifts 6 inches or less to an elevation of 0.30 the culvert diameter.2) Type 4 Installation. When working on a rock foundation, place bedding to a depth of 6 inches or equal to $Bc/12$, the pipe diameter in inches divided by 12, whichever is greater. For all other foundations, place a minimum of 4 inches of bedding. <p>B) Corrugated Metal, Thermoplastic, and Structural Plate Pipe. Place and compact bedding to provide 4 inches of bedding below the outside invert of the pipe after shaping. Shape the bedding to conform to the invert shape throughout the entire width and length of the proposed structure. Place and compact additional bedding material in lifts 6 inches or less to an elevation of 0.30 the culvert diameter.</p>
<p>SUBSECTION: 701.03.06 Initial Backfill. PART: A) Reinforced Concrete REVISION: Replace with the following:</p> <p>A) Reinforced Concrete Pipe.</p> <ul style="list-style-type: none">1) Type 1 Installation. When the top of the pipe is not within one pipe diameter of the subgrade, backfill with granular backfill, additional bedding material, or flowable fill from the top of the bedding to an elevation equal to 1/2 the pipe diameter, and either granular backfill, flowable fill, or embankment material in 6-inch lifts to an elevation of one-foot above the pipe.2) Type 4 Installation. Backfill from the top of the bedding with granular backfill, flowable fill, or embankment material in 6-inch lifts to an elevation of one-foot above the pipe. The Department will allow Type 4 installations for median drains and pipe installations located 35 feet or more from the edge of shoulder, back of curb, or any paved surface.

**Supplemental Specifications to The Standard Specifications
for Road and Bridge Construction, 2004 Edition
(Effective with the January 19, 2007 Letting)**

SUBSECTION:	701.05 PAYMENT.
REVISION:	Replace bid item “2599 Fabric-Geotextile, Type IV Square Yard” with “21433ES214 Fabric-Geotextile, Type IV for Pipe Square Yard ⁽²⁾ ”
	Replace foot note “** The unit bid price is \$2.00 per square yard for Geotextile Fabric, Type III” with “ ⁽²⁾ The unit price is \$2.00 per square yard for Fabric-Geotextile, Type IV for Pipe”
SUBSECTION:	710.02.15 Plastic Adjusting Rings.
REVISION:	Replace this section with:
	710.02.15 Plastic or Rubber Adjusting Rings. Provide plastic or rubber adjusting rings that are on the Department’s List of Approved Materials.
SUBSECTION:	710.03.03 Adjusted Small Drainage Structures.
REVISION:	Replace the last sentence of the first paragraph:
	For plastic or rubber adjusting rings, install and seal according to the manufacturer’s recommendations.
SUBSECTION:	711.02 MATERIALS.
REVISION:	Replace with the following:
	Conform to the Contract requirements.
SUBSECTION:	713.03 CONSTRUCTION.
REVISION:	Add the following after the third paragraph:
	Offset longitudinal lines at least 2 inches from longitudinal pavement construction joints. Offset longitudinal lane lines on multi-lane highways 2 inches towards the median.
SUBSECTION:	714.03.06 Proving Period for Durable Markings.
PART:	B) Failure.
REVISION:	Replace the first sentence with the following:
	During the proving period, the Department will consider markings defective when the retroreflectivity falls below the minimum required or the material fails to meet the other requirements of A) above. Additionally, when more than 10 percent of any one-mile section or individual gore area is defective, the Department will consider the entire section defective.
SUBSECTION:	716.03.08 Testing.
REVISION:	Replace “10 megohms” with “100 megohms”
SUBSECTION:	723.03 CONSTRUCTION.
REVISION:	Replace the first sentence of the fourth paragraph with the following:
	Set right-of-way markers within 12 inches of the right-of-way line.
SUBSECTION:	724.02.01 Plants.
REVISION:	Replace the reference “American Association of Nurserymen” with “American Nursery and Landscape Association”.
SUBSECTION:	801.01 REQUIREMENTS.
REVISION:	Add the following sentence after the third sentence of the first paragraph:
	Mills must request and be approved by the Department to supply cement with an SO ₃ content above the value in Table 1 of ASTM C 150.
SUBSECTION:	804.01.03 Conglomerate Sand.
REVISION:	Replace second sentence of the paragraph with the following:
	Conglomerate sand may include some material which has been produced by crushing larger pieces of the parent material.
SUBSECTION:	804.02 Approval.
REVISION:	Replace first sentence of the second paragraph with the following:
	The Department will consider a source for inclusion on the Aggregate Source List when the aggregate producer complies with KM 64-608 and provides the following:

**Supplemental Specifications to The Standard Specifications
for Road and Bridge Construction, 2004 Edition
(Effective with the January 19, 2007 Letting)**

SUBSECTION: 804.03 Concrete. REVISION: Second sentence in first paragraph should be a separate paragraph immediately following the first and should read as follows: Provide natural, crushed, or conglomerate sand. The Department will allow any combination of natural, crushed, or conglomerate sand when the combination is achieved in the concrete plant weigh hopper. The Engineer may allow other sands. Use natural or conglomerate sands as fine aggregates in concrete intended as a wearing surface for traffic. Conform to the following:
SUBSECTION: 804.04.03 Polish-Resistant Aggregate. REVISION: Add the following paragraph: Provide a signed certification from the aggregate producer for the manufactured polish-resistant fine aggregate stating that the aggregate is supplied from the approved parent material as found on the Department's List of Approved Materials, Polish-Resistant Aggregate Source List and Guidelines on the Division of Materials' webpage.
SUBSECTION: 804.04.04 Requirements for Combined Aggregates. PART: D) Absorption. REVISION: Delete the first sentence and replace the second sentence with the following: Provide total combined fine aggregates having a water absorption of no more than 4.0 percent.
SUBSECTION: 804.11 Sampling and Testing. REVISION: For Absorption (Fine Aggregate), replace method "AASHTO T 84" with "KM 64-605"
SUBSECTION: 805.02 Approval. REVISION: Replace first sentence of the second paragraph with the following: The Department will consider a source for inclusion on the Aggregate Source List when the aggregate producer complies with KM 64-608 and provides the following:
SUBSECTION: 805.04.01 JPC Base, JPC Pavement, JPC Shoulders, and Concrete for Bridge Decks. REVISION: Replace the subsection heading and first sentence with the following: 805.04.01 JPC Base, JPC Pavement, JPC Shoulders, Concrete for Bridge Decks, and Precast Products. Add the following paragraph: Provide a signed certification from the aggregate producer for the approved freeze-thaw coarse aggregate stating that the aggregate is supplied from the approved parent material as found on the Department's List of Approved Materials and Concrete Aggregate Restriction List.
SUBSECTION: 805.04.01 JPC Base, JPC Shoulders, and Concrete for Bridge Decks. PART: 3) REVISION: Replace the "tests" with "test" in the last sentence.
SUBSECTION: 805.05.05 Polish-Resistant Aggregate. REVISION: Add the following paragraph: Provide a signed certification from the aggregate producer for the manufactured polish-resistant coarse aggregate stating that the aggregate is supplied from the approved parent material as found on the Department's List of Approved Materials, Polish-Resistant Aggregate Source List and Guidelines on the Division of Materials' webpage.

**Supplemental Specifications to The Standard Specifications
for Road and Bridge Construction, 2004 Edition**
(Effective with the January 19, 2007 Letting)

SUBSECTION: 805.13.01 Cyclopean Stone Riprap and Channel Lining Class III. REVISION: Replace the subsection with the following: 805.13.01 Cyclopean Stone Riprap and/or Channel Lining Class III. Provide material meeting the general requirements of Section 805. Ensure that 100 percent passes through a square opening of 16 inches by 16 inches, and no more than 20 percent passes through square openings of 8 inches by 8 inches. The Department may allow stones of smaller sizes for filling voids in the upper surface and dressing to the proper slope.
SUBSECTION: 806.03.03 Modification. REVISION: Replace the first sentence with the following: Use only styrene-butadiene (SB) or styrene-butadiene-styrene (SBS) modifiers.
SUBSECTION: 810.02 APPROVAL. REVISION: Replace reference "KM 114" with "KM 115".
SUBSECTION: 810.03.06 Identification and Markings. REVISION: Delete the following text from the first paragraph: "When the manufacturer has more than one plant, include the plant letter assigned by the Division of Materials after the date of manufacture as follows: L-Louisville N-London" Delete the following paragraph: "The Department will not require the certification on the shipment approval form to be notarized. The Department will not require the information under "Pipe Data" on the approval form when the manufacture's shipment ticket is attached and contains the necessary information."
SUBSECTION: 811.02.01 Requirements. REVISION: Replace the subsection with the following: Furnish bar reinforcement for bridges, cast-in-place culverts, and cast-in-place retaining walls that conforms to ASTM A 615 (billet) or ASTM A 996 (rail). ASTM A 706 steel is acceptable with prior approval of the Division of Materials. Do not weld any steel bar reinforcement unless it is ASTM A 706 rebar. The Engineer will accept rail steel bar reinforcement in straight lengths only. Do not use rail steel reinforcement where field bending is allowed or required.
SUBSECTION: 811.09.02 Dowel Bars. REVISION: Replace the reference to "ASTM A 616" with "ASTM A 996" Insert the following sentence between the third and fourth sentence of the first paragraph: Broken or sheared ends are acceptable with prior approval of the Division of Materials.
SUBSECTION: 811.06 BAR MATS. REVISION: Replace the subsection with the following: Conform to ASTM A 184 and fabricate by welding deformed Grade 60 weldable bars.
SUBSECTION: 811.09.02 Dowel Bars. REVISION: Replace the first paragraph with the following: Furnish dowel bars that are plain round bars conforming to ASTM A 706, A 615, A 996, or A 617 with respect to mechanical properties only. Provide either Grade 40, 50 or 60 steel. Saw cut the free ends of the dowels and ensure that they are free of burrs or projections. Broken or sheared ends are acceptable with prior approval of the Division of Materials. Coat dowel bars according to AASHTO M 254 with the following exceptions for Type B coatings:

**Supplemental Specifications to The Standard Specifications
for Road and Bridge Construction, 2004 Edition
(Effective with the January 19, 2007 Letting)**

SUBSECTION:	811.10.02 Epoxy Coating Material.
REVISION:	Replace both the reference to "ASTM D 3963 Annex" and "ASTM D 3963" with "AASHTO M 284".
SUBSECTION:	812.01.02 Hot-Rolled Carbon Steel Sheets and Strip of Structural Quality, Grade 33 (Corrugated Steel Plank for Bridge Floors).
REVISION:	Replace the reference to "ASTM A 570" with "ASTM A 1011"
SUBSECTION:	827.04 SEED.
PART:	1)
REVISION:	Replace with the following: Obtain seed only through registered dealers holding a permit to label seed.
SUBSECTION:	827.04 SEED.
REVISION:	Replace the second paragraph with the following: Do not use seed (grasses, native grasses and legumes) if the seed test date is over 9 months old exclusive of the month tested, or if the limits of noxious weed seed is exceeded.
SUBSECTION:	827.04 SEED.
REVISION:	Replace the last paragraph with the following: Wildflower seed shall not be planted until approved by the Division of Materials
SUBSECTION:	828.02 APPROVAL.
REVISION:	Add the following: The Department will continue to include the masonry coatings on the list contingent upon receiving an annual certification containing the following information: 1) A statement that the masonry coating to be furnished during the particular calendar year is of the same composition as that previously approved for inclusion on the approved list. 2) A statement that the masonry coating conforms to the appropriate requirements of the Kentucky Standard Specifications for Road and Bridge Construction. 3) A statement that notification will be made to the Division of Materials of any changes in composition for review and approval before furnishing the material to projects.
SUBSECTION:	843.01.02 Acceptance Procedures for Non-Specification Fabric.
TABLE:	GRAB STRENGTH PAYMENT REDUCTION
REVISION:	Add the following note: The Department will use the lowest value of MACHINE and CROSS for the reduction calculation.
SUBSECTION:	844.02.01 Fly Ash.
PART:	1)
REVISION:	Delete the last sentence.
SUBSECTION:	844.02.01 Fly Ash.
REVISION:	Replace the subsection with the following: 844.02.01 Fly Ash. Select from the Department's List of Approved Materials for fly ash sources. To be placed on the list, furnish samples and ASTM C 618 test data developed over the previous 3 months, and confirm to the requirements in KM 64-325.

STANDARD DRAWINGS THAT APPLY

TRAFFIC
~TEMPORARY~
TRAFFIC CONTROL

LANE CLOSURE MULTI-LANE HIGHWAY CASE II TTC-120

DEVICES

MISCELLANEOUS TRAFFIC CONTROL DEVICES TTD-100
MISCELLANEOUS TRAFFIC CONTROL DEVICES TTD-105
POST SPLICING DETAIL TTD-110
ARROW PANEL TTD-115

BRIDGES

MISCELLANEOUS STANDARDS

BRIDGE RESTORATION AND WATERPROOFING WITH CONCRETE
OVERLAYS BGX-009-04

JOINTS

NEOPRENE EXPANSION DAMS AND ARMORED EDGES BJE-001-11

PART III

EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

TRANSPORTATION CABINET DEPARTMENT OF HIGHWAYS

LABOR AND WAGE REQUIREMENTS APPLICABLE TO OTHER THAN FEDERAL-AID SYSTEM PROJECTS

- I. Application
- II. Nondiscrimination of Employees (KRS 344)
- III. Payment of Predetermined Minimum Wages
- IV. Statements and Payrolls

I. APPLICATION

1. These contract provisions shall apply to all work performed on the contract by the contractor with his own organization and with the assistance of workmen under his immediate superintendence and to all work performed on the contract by piecework, station work or by subcontract. The contractor's organization shall be construed to include only workmen employed and paid directly by the contractor and equipment owned or rented by him, with or without operators.

2. The contractor shall insert in each of his subcontracts all of the stipulations contained in these Required Provisions and such other stipulations as may be required.

3. A breach of any of the stipulations contained in these Required Provisions may be grounds for termination of the contract.

II. NONDISCRIMINATION OF EMPLOYEES

AN ACT OF THE KENTUCKY GENERAL ASSEMBLY TO PREVENT DISCRIMINATION IN EMPLOYMENT KRS CHAPTER 344 EFFECTIVE JUNE 16, 1972

The contract on this project, in accordance with KRS Chapter 344, provides that during the performance of this contract, the contractor agrees as follows:

1. The contractor shall not fail or refuse to hire, or shall not discharge any individual, or otherwise discriminate against an individual with respect to his compensation, terms, conditions, or privileges of employment, because of such individual's race, color, religion, national origin, sex, disability or age (between forty and seventy); or limit, segregate, or classify his employees in any way which would deprive or tend to deprive an individual of employment opportunities or otherwise adversely affect his status as an employee, because of such individual's race, color, religion, national origin, sex, disability or age (between forty and seventy). The contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.

2. The contractor shall not print or publish or cause to be printed or published a notice or advertisement relating to employment by such an employer or membership in or any classification or referral for employment by the employment agency, indicating any preference, limitation, specification, or discrimination, based on race, color, religion, national origin, sex, disability or age (between forty and seventy), except that such notice or advertisement may indicate a preference, limitation, or specification based on religion, or national origin when religion, or national origin is a bona fide occupational qualification for employment.

3. If the contractor is in control of apprenticeship or other training or retraining, including on-the-job training programs, he shall not discriminate against an individual

because of his race, color, religion, national origin, sex, disability or age (between forty and seventy), in admission to, or employment in any program established to provide apprenticeship or other training.

4. The contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other contract or understanding, a notice to be provided advising the said labor union or workers' representative of the contractor's commitments under this section, and shall post copies of the notice in conspicuous places available to employees and applicants for employment. The contractor will take such action with respect to any subcontract or purchase order as the administering agency may direct as a means of enforcing such provisions, including sanctions for non-compliance.

III. PAYMENT OF PREDETERMINED MINIMUM WAGES

1. These special provisions are supplemented elsewhere in the contract by special provisions which set forth certain predetermined minimum wage rates. The contractor shall pay not less than those rates.

2. The minimum wage determination schedule shall be posted by the contractor, in a manner prescribed by the Department of Highways, at the site of the work in prominent places where it can be easily seen by the workers.

IV. STATEMENTS AND PAYROLLS

1. All contractors and subcontractors affected by the terms of KRS 337.505 to 337.550 shall keep full and accurate payroll records covering all disbursements of wages to their employees to whom they are required to pay not less than the prevailing rate of wages. Payrolls and basic records relating thereto will be maintained during the course of the work and preserved for a period of one (1) year from the date of completion of this contract.

2. The payroll records shall contain the name, address and social security number of each employee, his correct classification, rate of pay, daily and weekly number of hours worked, itemized deductions made and actual wages paid.

3. The contractor shall make his daily records available at the project site for inspection by the State Department of Highways contracting office or his authorized representative.

Periodic investigations shall be conducted as required to assure compliance with the labor provisions of the contract. Interrogation of employees and officials of the contractor shall be permitted during working hours.

Aggrieved workers, Highway Managers, Assistant District Engineers, Resident Engineers and Project Engineers shall report all complaints and violations to the Division of Contract Procurement.

The contractor shall be notified in writing of apparent violations. The contractor may correct the reported violations and notify the Department of Highways of the action taken or may request an informal hearing. The request for hearing shall be in writing within ten (10) days after receipt of the notice of the reported violation. The contractor may submit

records and information which will aid in determining the true facts relating to the reported violations.

Any person or organization aggrieved by the action taken or the findings established as a result of an informal hearing by the Division of Contract Procurement may request a formal hearing.

4. The wages of labor shall be paid in legal tender of the United States, except that this condition will be considered satisfied if payment is made by a negotiable check, on a solvent bank, which may be cashed readily by the employee in the local community for the full amount, without discount or collection charges of any kind. Where checks are used for payments, the contractor shall make all necessary arrangements for them to be cashed and shall give information regarding such arrangements.

5. No fee of any kind shall be asked or accepted by the contractor or any of his agents from any person as a condition of employment on the project.

6. No laborers shall be charged for any tools used in performing their respective duties except for reasonably avoidable loss or damage thereto.

7. Every employee on the work covered by this contract shall be permitted to lodge, board, and trade where and with whom he elects and neither the contractor nor his agents, nor his employees shall directly or indirectly require as a condition of employment that an employee shall lodge, board or trade at a particular place or with a particular person.

8. Every employee on the project covered by this contract shall be an employee of either the prime contractor or an approved subcontractor.

9. No charge shall be made for any transportation furnished by the contractor or his agents to any person employed on the work.

10. No individual shall be employed as a laborer or mechanic on this contract except on a wage basis, but this shall not be construed to prohibit the rental of teams, trucks or other equipment from individuals.

No Covered employee may be employed on the work except in accordance with the classification set forth in the schedule mentioned above; provided, however, that in the event additional classifications are required, application shall be made by the contractor to the Department of Highways and (1) the Department shall request appropriate classifications and rates from the proper agency, or (2) if there is urgent need for additional classification to avoid undue delay in the work, the contractor may employ such workmen at rates deemed comparable to rates established for similar classifications provided he has made written application through the Department of Highways, addressed to the proper agency, for the supplemental rates. The contractor shall retroactively adjust, upon receipt of the supplemental rates schedule, the wages of any employee paid less than the established rate and may adjust the wages of any employee overpaid.

11. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any laborer or mechanic in any work-week in which he is employed on such work, to work in excess of eight hours in any calendar day or in excess of forty hours in such work-week unless such laborer or mechanic receives compensation at a rate not less than one and one half times his basic rate of pay for all hours worked in excess of eight hours in any calendar day or in excess of forty hours in such work-week. A laborer, workman or mechanic and an employer may enter into a written agreement or a collective bargaining agreement to work more than eight (8) hours a calendar day but not more than ten (10) hours a calendar day for the straight time hourly rate. This agreement shall be in writing and shall be executed prior to the employee working in excess of eight (8) hours, but not more than ten (10) hours, in any one (1) calendar day.

12. Payments to the contractor may be suspended or withheld due to failure of the contractor to pay any laborer or

mechanic employed or working on the site of the work, all or part of the wages required under the terms of the contract. The Department may suspend or withhold payments only after the contractor has been given written notice of the alleged violation and the contractor has failed to comply with the wage determination of the Department of Highways.

13. Contractors and subcontractors shall comply with the sections of Kentucky Revised Statutes, Chapter 337 relating to contracts for Public Works.

Revised 2-16-95

EXECUTIVE BRANCH CODE OF ETHICS

In the 1992 regular legislative session, the General Assembly passed and Governor Brereton Jones signed Senate Bill 63 (codified as KRS 11A), the Executive Branch Code of Ethics, which states, in part:

KRS 11A.040 (6) provides:

No present or former public servant shall, within six (6) months of following termination of his office or employment, accept employment, compensation or other economic benefit from any person or business that contracts or does business with the state in matters in which he was directly involved during his tenure. This provision shall not prohibit an individual from returning to the same business, firm, occupation, or profession in which he was involved prior to taking office or beginning his term of employment, provided that, for a period of six (6) months, he personally refrains from working on any matter in which he was directly involved in state government. This subsection shall not prohibit the performance of ministerial functions, including, but not limited to, filing tax returns, filing applications for permits or licenses, or filing incorporation papers.

KRS 11A.040 (8) states:

A former public servant shall not represent a person in a matter before a state agency in which the former public servant was directly involved, for a period of one (1) year after the latter of:

- a) The date of leaving office or termination of employment; or
- b) The date the term of office expires to which the public servant was elected.

This law is intended to promote public confidence in the integrity of state government and to declare as public policy the idea that state employees should view their work as a public trust and not as a way to obtain private benefits.

If you have worked for the executive branch of state government within the past six months, you may be subject to the law's prohibitions. The law's applicability may be different if you hold elected office or are contemplating representation of another before a state agency.

Also, if you are affiliated with a firm which does business with the state and which employs former state executive-branch employees, you should be aware that the law may apply to them.

In case of doubt, the law permits you to request an advisory opinion from the Executive Branch Ethics Commission, Room 136, Capitol Building, 700 Capitol Avenue, Frankfort, Kentucky 40601; telephone (502) 564-7954.

Kentucky Equal Employment Opportunity Act of 1978

The requirements of the Kentucky Equal Employment Opportunity Act of 1978 (KRS 45.560-45.640) shall apply to this Contract. The apparent low Bidder will be required to submit EEO forms to the Division of Construction Procurement, which will then forward to the Finance and Administration Cabinet for review and approval. No award will become effective until all forms are submitted and EEO/CC has certified compliance. The required EEO forms are as follows:

- EEO-1: Employer Information Report
- Affidavit of Intent to Comply
- Employee Data Sheet
- Subcontractor Report

These forms are available on the Finance and Administration's web page under ***Vendor Information, Standard Attachments and General Terms*** at the following address:
<https://www.eProcurement.ky.gov>.

Bidders currently certified as being in compliance by the Finance and Administration Cabinet may submit a copy of their approval letter in lieu of the referenced EEO forms.

For questions or assistance please contact the Finance and Administration Cabinet by email at **finance.contractcompliance@ky.gov** or by phone at 502-564-2874.

**TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES**

HIGHWAY BASIC HOURLY RATES	FRINGE BENEFIT PAYMENTS COMBINED
---	---

CRAFTS:

Ballard, Butler, Caldwell, Carlisle, Crittenden, Daviess, Edmonson, Fulton, Graves, Hancock, Henderson, Hickman, Hopkins, Livingston, Lyon, Marshall, McCracken, McLean, Muhlenberg, Ohio, Union & Webster Counties:

Bricklayers25.25.....10.20

Allen, Calloway, Christian, Logan, Simpson, Todd, Trigg & Warren Counties:

Bricklayers25.10.....1.60

All Counties:

Carpenters23.60.....8.97

Divers35.78.....8.97

Piledrivermen23.85.....8.97

Butler, Edmonson, Logan, Todd & Warren Counties:

Electricians25.91.....23.5% + 4.55

Allen & Simpson Counties:

Electricians15.85.....4.115

Ballard, Caldwell, Calloway, Carlisle, Christian, Crittenden, Fulton (Except a 5 mile radius of City Hall in Fulton), Graves, Hickman, Livingston, Lyon, Marshall, McCracken & Trigg Counties:

Electricians:

Electricians26.57.....24% + 5.15

Cable Splicers26.32.....24% + 5.15

Daviess, Hancock, Henderson, Hopkins, McLean, Muhlenberg, Ohio, Union & Webster Counties:

Electricians:

Electricians25.12.....26.125% + 5.35

Heilarc Welding & Cable Splicing25.37.....26.125% + 5.35

Fulton County (Up to a 5 mile radius of City Hall in Fulton):

Electricians18.50.....9.99

Cable Splicers19.00.....9.99

Butler County (Eastern eighth, including the Townships of Decker, Lee & Tilford);

Edmonson County (Northern three-fourths, including the Townships of Asphalt, Bee Spring, Brownsville, Grassland, Huff, Kyrock, Lindseyville, Mammoth Cave, Ollie, Prosperity, Rhoda, Sunfish & Sweden):

Ironworkers:

Structural; Ornamental; Reinforcing;

Precast Concrete Erectors23.49.....14.80

**TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES**

HIGHWAY BASIC HOURLY RATES	FRINGE BENEFIT PAYMENTS COMBINED
---	---

CRAFTS: (continued)

Butler County (Townships of Aberdeen, Bancock, Casey, Dexterville, Dunbar, Elfie, Gilstrap, Huntsville, Logansport, Monford, Morgantown, Provo, Rochester, and South Hill & Welchs Creek); Caldwell County (Northeastern third, including the Township of Creswell); Christian County (Northern third, including Townships of Apex, Crofton, Kelly, Mannington and Wynns); Crittenden County (Northeastern half, including the Townships of Grove, Mattoon, Repton, Shady Grove and Tribune); Muhlenberg County (Townships of Bavier, Beech Creek Junction, Benton, Brennen, Browder, Central City, Cleaton, Depoy, Drakesboro, Eunis, Graham, Hillside, Luzerne, Lynn City, Martwick, McNary, Moorman, Millport, Nelson, Paradise, Powderly, South Carrollton, Tarina and Weir);

Daviess, Hancock, Henderson, Hopkins, McLean, Ohio, Union and Webster Counties:

Ironworkers	23.50.....12.475
-------------------	------------------

Butler County (Southern third, including the Townships of Boston, Berrys Lick, Dimple, Jetson, Quality, Sharer, Sugar Grove and Woodbury);

Christian County (Eastern two-thirds, including the Townships of Bennettstown, Casky, Herndon, Hopkinsville, Howell, Masonville, Pembroke and Thompsonville);

Edmonson County (Southern fourth, including the Townships of Chalybeate & Rocky Hill);

Muhlenberg County (Southern eighth, including the Townships of Dunnior, Penrod & Rosewood);

Allen, Logan, Simpson, Todd and Warren Counties:

Ironworkers	19.58.....8.57
-------------------	----------------

Caldwell County (Southwestern two-thirds, including the Townships of Cedar Bluff, Cider, Claxton, Cobb, Crowtown, Dulaney, Farmersville, Fredonia, McGowan, Otter Pond and Princeton);

Christian County (Western third, excluding the Townships of Apex, Crofton, Kelly, Mannington, Wynns, Bennettstown, Casky, Herndon, Hopkinsville, Howell, Masonville, Pembroke and Thompsonville);

Crittenden County (Southwestern half, including the Townships of Crayne, Dycusburg, Frances, Marion, Mexico, Midway, Sheridan and Told);

Ballard, Calloway, Carlisle, Fulton, Graves, Hickman, Livingston, Lyon, Marshall, McCracken and Trigg Counties:

Ironworkers

Projects with a total contract cost of \$20,000,000.00 or above

.....	23.50.....13.55
-------	-----------------

All other work.....	22.20.....12.49
---------------------	-----------------

Allen, Butler, Edmonson, Logan, Simpson & Warren Counties:

Millwrights.....	23.25.....13.52
------------------	-----------------

**TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES**

HIGHWAY BASIC HOURLY RATES	FRINGE BENEFIT PAYMENTS COMBINED
---	---

CRAFTS: (continued)

Ballard, Caldwell, Calloway, Carlisle, Christian, Crittenden, Fulton, Graves, Hickman, Hopkins, Livingston, Lyon, Marshall, McCracken, Todd & Trigg Counties:

Millwrights:.....21.75.....12.68

Daviess, Hancock, Henderson, McLean, Muhlenberg, Ohio, Union & Webster Counties:

Millwrights:.....21.83.....12.75

Ballard County:

Painters:

Bridges and Dams27.09.....10.18

All Other Work22.79.....10.18

Spray, Blast, Steam, High and Hazardous (Including Lead Abatement) and All Epoxy – 1.00 Premium.

Edmonson County:

Painters:

Brush & Roller17.37.....8.32

Spray, Sandblast, Power Tools,
Waterblast & Steam Cleaning.....17.87.....8.32

Daviess, Hancock, Henderson, McLean, Ohio, Union & Webster Counties:

Painters:

Bridges, Locks & Dams:

GROUP 124.00.....9.48

GROUP 224.25.....9.48

GROUP 325.00.....9.48

GROUP 426.00.....9.48

All Other Work:

GROUP 122.85.....9.48

GROUP 223.10.....9.48

GROUP 323.85.....9.48

GROUP 424.85.....9.48

PAINTER CLASSIFICATIONS

GROUP 1 – Brush & Roller

GROUP 2 – Plasterers

GROUP 3 – Spray; Sandblast; Power Tools; Waterblast; Steamcleaning; Brush & Roller of Mastics, Creosotes, Kwinch Koate & Coal Tar Epoxy

GROUP 4 – Spray of Mastics, Creosotes, Kwinch Koate & Coal Tar Epoxy

**TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES**

HIGHWAY BASIC HOURLY RATES	FRINGE BENEFIT PAYMENTS COMBINED
Allen, Butler, Logan, Muhlenberg, Simpson, Todd & Warren Counties:	
Painters:	
Bridges, Locks & Dams	
Brush & Roller	21.03 6.80
Bridges, Locks & Dams	
Spray; Sandblast; Power Tools; Waterblast & Steam	
Cleaning	22.03 6.80
All Other Work	
Brush & Roller	17.03 6.80
All Other Work	
Spray; Sandblast; Power Tools; Waterblast & Steam	
Cleaning	18.03 6.80
All Other Work – High Time Pay	
Over 35 feet (up to 100 feet) - \$1.00 above base wage	
100 feet and over - \$2.00 above base wage	
During spray painting and sandblasting operations, pot tenders shall receive the same wage rates as the spray painter or nozzle operator	
Caldwell, Calloway, Carlisle, Christian, Crittenden, Fulton, Graves, Hickman, Hopkins, Livingston, Lyon, Marshall, McCracken & Trigg Counties:	
Painters:	
Bridges and Dams	24.00 8.30
All Other Work	17.75 8.30
Waterblasting units with 3500 PSI and above - \$.50 premium	
Spraypainting and all abrasive blasting - \$1.00 premium	
Work 40 ft. and above ground level - \$1.00 premium	
Allen, Butler, Edmonson, Simpson, Warren Counties:	
Plumber/Pipefitter	27.20 12.47
Ballard, Caldwell, Calloway, Carlisle, Christian, Crittenden, Fulton, Graves, Hickman, Livingston, Lyon, Marshall, McCracken & Trigg Counties:	
Plumbers & Steamfitters	26.33 12.05
Allen, Butler, Edmonson, Simpson & Warren Counties:	
Plumbers & Steamfitters	27.20 12.47
Daviss, Hancock, Henderson, Hopkins, Logan, McLean, Muhlenberg, Ohio, Todd, Union & Webster Counties:	
Plumbers & Pipefitters	24.42 11.15
Welders - Receive rate for craft in which welding is incidental.	

**TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES**

LABORERS:

Ballard, Calloway, Carlisle, Fulton, Graves, Hickman, Livingston, Lyon, Marshall and McCracken Counties:

GROUP 1 - Aging & curing of concrete, asbestos abatement worker, asphalt plant, asphalt, batch truck dump, carpenter tender, cement mason tender, cleaning of machines, concrete, demolition, dredging, environmental -nuclear radiation, toxic & hazardous waste - Level D, flagperson, grade checker, hand digging & hand back filling, highway marker placer, landscaping, mesh handler & placer, puddler, railroad, rip-rap & grouter, right-of-way, sign, guard rail & fence installer, signal person, sound barrier installer, storm & sanitary sewer, swamper, truck spotter & dumper & wrecking of concrete forms, general cleanup.

BASE RATE.....18.40
FRINGE BENEFITS9.21

GROUP 2 - Batter board man (sanitary & storm sewer), brickmason tender, mortar mixer operator, scaffold builder, burner & welder, bushhammer, chain saw operator, concrete saw operator, deckhand scow man, dry cement handler, environmental - nuclear, radiation, toxic & hazardous waste - Level C, forklift operator for masonry, form setter, green concrete cutting, hand operated grouter & grinder machine operator, jackhammer, pavement breaker, paving joint machine, pipelayer, plastic pipe fusion, power driven georgia buggy & wheel barrow, power post hole digger, precast manhole setter, walk-behind tamper, walk-behind trencher, sand blaster, concrete chipper, surface grinder, vibrator operator and wagon driller.

BASE RATE.....18.65
FRINGE BENEFITS9.21

GROUP 3 - Asphalt luteman & raker, gunnite nozzleman, gunnite operator & mixer, grout pump operator, blaster, side rail setter, rail paved ditches, screw operator, tunnel (free air), and water blaster .

BASE RATE.....18.70
FRINGE BENEFITS9.21

GROUP 4 - Caisson worker (free air), cement finisher, environmental - nuclear, radiation, toxic & hazardous waste - levels A & B, miner & driller (free air), tunnel blaster and tunnel mucker (free air), directional & horizontal boring, air track drillers (all types), powderman & blasters, troxler & concrete tester if laborer is utilized.

BASE RATE.....19.30
FRINGE BENEFITS9.21

**TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES**

LABORERS:

Allen, Butler, Caldwell, Christian, Daviess, Edmonson, Hancock, Hopkins, Logan, McLean, Muhlenberg, Ohio Simpson, Todd, Trigg and Warren Counties;

GROUP 1 - Aging & curing of concrete, asbestos abatement worker, asphalt plant, asphalt, batch truck dump, carpenter tender, cement mason tender, cleaning of machines, concrete, demolition, dredging, environmental -nuclear radiation, toxic & hazardous waste - Level D, flagperson, grade checker, hand digging & hand back filling, highway marker placer, landscaping, mesh handler & placer, puddler, railroad, rip-rap & grouter, right-of-way, sign, guard rail & fence installer, signal person, sound barrier installer, storm & sanitary sewer, swamper, truck spotter & dumper & wrecking of concrete forms, general cleanup.

BASE RATE.....19.18
FRINGE BENEFITS8.43

GROUP 2 - Batter board man (sanitary & storm sewer), brickmason tender, mortar mixer operator, scaffold builder, burner & welder, bushhammer, chain saw operator, concrete saw operator, deckhand scow man, dry cement handler, environmental - nuclear, radiation, toxic & hazardous waste - Level C, forklift operator for masonry, form setter, green concrete cutting, hand operated grouter & grinder machine operator, jackhammer, pavement breaker, paving joint machine, pipelayer, plastic pipe fusion, power driven georgia buggy & wheel barrow, power post hole digger, precast manhole setter, walk-behind tamper, walk-behind trencher, sand blaster, concrete chipper, surface grinder, vibrator operator and wagon driller.

BASE RATE.....19.43
FRINGE BENEFITS8.43

GROUP 3 - Asphalt luteman & raker, gunnite nozzleman, gunnite operator & mixer, grout pump operator, blaster, side rail setter, rail paved ditches, screw operator, tunnel (free air), and water blaster .

BASE RATE.....19.48
FRINGE BENEFITS8.43

GROUP 4 - Caisson worker (free air), cement finisher, environmental - nuclear, radiation, toxic & hazardous waste - levels A & B, miner & driller (free air), tunnel blaster and tunnel mucker (free air), directional & horizontal boring, air track drillers (all types), powderman & blasters, troxler & concrete tester if laborer is utilized.

BASE RATE.....20.08
FRINGE BENEFITS8.43

**TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES**

LABORERS:

Crittenden, Henderson, Union and Webster Counties:

GROUP 1 - Aging & curing of concrete, asbestos abatement worker, asphalt plant, asphalt, batch truck dump, carpenter tender, cement mason tender, cleaning of machines, concrete, demolition, dredging, environmental -nuclear radiation, toxic & hazardous waste - Level D, flagperson, grade checker, hand digging & hand back filling, highway marker placer, landscaping, mesh handler & placer, puddler, railroad, rip-rap & grouter, right-of-way, sign, guard rail & fence installer, signal person, sound barrier installer, storm & sanitary sewer, swamper, truck spotter & dumper & wrecking of concrete forms, general cleanup.

BASE RATE19.56
FRINGE BENEFITS8.05

GROUP 2 - Batter board man (sanitary & storm sewer), brickmason tender, mortar mixer operator, scaffold builder, burner & welder, bushhammer, chain saw operator, concrete saw operator, deckhand scow man, dry cement handler, environmental - nuclear, radiation, toxic & hazardous waste - Level C, forklift operator for masonry, form setter, green concrete cutting, hand operated grouter & grinder machine operator, jackhammer, pavement breaker, paving joint machine, pipelayer, plastic pipe fusion, power driven georgia buggy & wheel barrow, power post hole digger, precast manhole setter, walk-behind tamper, walk-behind trencher, sand blaster, concrete chipper, surface grinder, vibrator operator and wagon driller.

BASE RATE19.81
FRINGE BENEFITS8.05

GROUP 3 - Asphalt luteman & raker, gunnite nozzleman, gunnite operator & mixer, grout pump operator, blaster, side rail setter, rail paved ditches, screw operator, tunnel (free air), and water blaster .

BASE RATE19.86
FRINGE BENEFITS8.05

GROUP 4 - Caisson worker (free air), cement finisher, environmental - nuclear, radiation, toxic & hazardous waste - levels A & B, miner & driller (free air), tunnel blaster and tunnel mucker (free air), directional & horizontal boring, air track drillers (all types), powderman & blasters, troxler & concrete tester if laborer is utilized.

BASE RATE20.08
FRINGE BENEFITS8.05

**TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES**

TEAMSTERS:

Truck Drivers:

Allen, Butler, Edmonson, Logan, Simpson & Warren Counties:

Greaser, tire changer.

BASE RATE17.54
FRINGE BENEFITS10.84

Truck Mechanic.

BASE RATE17.87
FRINGE BENEFITS10.84

Single Axle Dump, Flat Bed, all Terrain vehicles when used to haul materials, Semi Trailer or Pole Trailer when used to pull building materials and equipment, Tandem Axle Dump, Driver of Distributors, Mixer all types.

BASE RATE17.94
FRINGE BENEFITS10.84

Winch and A-frame when used in transporting materials, Ross Carrier, Fork Lift when used to transport building materials, Driver on Pavement Breaker.

BASE RATE17.95
FRINGE BENEFITS10.84

Euclid and other Heavy Earth Moving Equipment, Low Boy, Articulator Cat, Five Axle Vehicle.

BASE RATE18.00
FRINGE BENEFITS10.84

Ballard, Calloway, Caldwell, Carlisle, Christian, Crittenden, Fulton, Graves, Hickman, Livingston, Lyon, Marshall, McCracken, Todd & Trigg Counties:
Greaser, Tire Changer.

BASE RATE23.89
FRINGE BENEFITS4.15

Truck Mechanic.

BASE RATE24.12
FRINGE BENEFITS4.15

**TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES**

TEAMSTERS: (continue)

Single Axle Dump, Flat Bed, all Terrain vehicles when used to haul materials, Semi Trailer or Pole Trailer when used to pull building materials and equipment, Tandem Axle Dump, Driver of Distributor, Mixer all types.

BASE RATE24.19
FRINGE BENEFITS4.15

Euclid, other Heavy Earth Moving Equipment, Low Boy, Articulator Cat, Five Axle Vehicle, Winch & A-Frame when used in transporting materials, Ross Carrier.

BASE RATE24.20
FRINGE BENEFITS4.15

Daviess, Hancock, Henderson, Hopkins, McLean, Muhlenberg, Ohio, Union & Webster Counties: Greaser, Tire Changer.

BASE RATE19.23
FRINGE BENEFITS9.20

Truck Mechanic.

BASE RATE19.46
FRINGE BENEFITS9.20

Single Axle Dump, Flat Bed, all Terrain Vehicle when used to haul materials, Semi Trailer or Pole Trailer when used to pull building materials and equipment, Tandem Axle Dump, Driver of Distributors, Mixer all types.

BASE RATE19.53
FRINGE BENEFITS9.20

Euclid and other Heavy Earth Moving Equipment, Low Boy, Articulator Cat, Five Axle Vehicle, Winch & A-Frame when used in transporting materials, Ross Carrier, Fork Lift when used to transport building materials, Driver on Pavement Breaker.

BASE RATE19.54
FRINGE BENEFITS9.20

**TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES**

OPERATING ENGINEERS:

A-frame Winch Truck, Auto Patrol, Backfiller, Batcher Plant, Bituminous Paver, Bituminous Transfer Machine, Boom Cat, Bulldozer, Mechanic, Cableway, Carry-All Scoop, Carry Deck Crane, Central Compressor Plant, Clamshell, Concrete Mixer (21 cu. ft. or over), Concrete Paver, Truck Mounted Concrete Pump, Core Drill, Crane, Crusher Plant, Derrick, Derrick Boat, Ditching and Trenching Machine, Dragline, Dredge Operator, Dredge Engineer, Elevating Grader and Loaders, Grade-All, Gurries, Heavy Equipment Robotics Operator/Mechanic, High Lift, Hoe-Type Machine, Hoist (two or more drums), Hoisting Engine (two or more drums), Horizontal Directional Drill Operator, Hydrocrane, Hyster, KeCal Loader, LeTourneau, Locomotive, Mechanic; Mechanically Operated Laser Screed, Mechanic Welder, Mucking Machine, Motor scraper, Orangepeel Bucket, Piledriver, Power Blade, Pumpcrete, Push Dozer, Rock Spreader attached to equipment, Rotary Drill, Roller (bituminous), Scarifier, Scoopmobile, Shovel, Side Boom, Subgrader, Tailboom, Telescoping type Forklift, Tow or Push boat, Tower Crane (French, German and other types), Tractor Shovel, Truck Crane, Tunnel Mining Machines, including Moles, Shields or similar types of Tunnel Mining Equipment.

BASE RATE22.95
FRINGE BENEFITS11.90

Air Compressor (over 900 cu. ft. per min.), Bituminous Mixer, Boom Type Tamping Machine, Bull Float, Concrete Mixer (under 21 cu. ft.), Dredge Engineer, Electric Vibrator, Compactor/Self-Propelled Compactor, Elevator (one drum or buck hoist), Elevator (when used to hoist building material), Finish Machine, Firemen & Hoist (one drum), Flexplane, Forklift (regardless of lift height), Form Grader, Joint Sealing Machine, Outboard Motor Boat, Power Sweeper (riding type), Roller (rock), Ross Carrier, Skid Mounted or Trailer Mounted Concrete Pump, Skid Steer Machine with all attachments, Switchman or Brakeman, Throttle Valve Person, Tractair and Road Widening Trencher, Tractor (50 H.P. or over), Truck Crane Oiler, Tugger, Welding Machine, Well Points, and Whirley Oiler.

BASE RATE20.53
FRINGE BENEFITS11.90

All off road material handling equipment, including Articulating Dump Trucks, Greaser on grease facilities servicing heavy equipment.

BASE RATE20.91
FRINGE BENEFITS11.90

**TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES**

OPERATING ENGINEERS: (continued)

Bituminous Distributor, Burlap and Curing Machine, Cement Gun, Concrete Saw, Conveyor, Deckhand Oiler, Grout Pump, Hydraulic Post Driver, Hydro Seeder, Mud Jack, Oiler, Paving Joint Machine, Power Form handling equipment, Pump, Roller (earth), Steerman, Tamping Machine, Tractor (under 50 H.P.) and Vibrator.

BASE RATE20.27
FRINGE BENEFITS11.90

Cranes - with booms 150 ft. and over (including jib), and where the length of the Boom in combination with the length of the piling equals or exceeds 150 ft. - \$1.00 above Group 1 rate.

Employees assigned to work below ground level are to be paid 10% above basic wage rate. This does not apply to open cut work.

Fringe benefit amounts are applicable for all hours worked except when otherwise noted.

These rates are listed pursuant to the Kentucky Determination No. CR-05-IHWY dated May 16, 2006 and/or Federal Decision No. KY20070025 dated February 9, 2007, modification #1 dated February 16, 2007 and modification #2 dated March 9, 2007.

**TRANSPORTATION CABINET
DIVISION OF CONSTRUCTION PROCUREMENT
COMPLIANCE SECTION
PROJECT WAGE RATES**

No laborer, workman or mechanic shall be paid at a rate less than that of a Journeyman except those classified as bona fide apprentices.

Apprentices or trainees shall be permitted to work as such subject to Administrative Regulations adopted by the Commissioner of Workplace Standards. Copies of these regulations will be furnished upon request from any interested person.

Before using apprentices on the job the contractor shall present to the Contracting Officer written evidence of registration of such employees in a program of a State apprenticeship and training agency approved and recognized by the U. S. Bureau of Apprenticeship and Training. In the absence of such a State agency, the contractor shall submit evidence of approval and registration by the U. S. Bureau of Apprenticeship and Training.

The contractor shall submit to the Contracting Officer, written evidence of the established apprenticeship-journeyman ratios and wage rates in the project area, which will be the basis for establishing such ratios and rates for the project under the applicable contract provisions.

TO: EMPLOYERS/EMPLOYEES

PREVAILING WAGE SCHEDULE:

The wages indicated on this wage schedule are the least permitted to be paid for the occupations indicated. When an employee works in more than one classification, the employer must record the number of hours worked in each classification at the prescribed hourly base rate.

OVERTIME:

Overtime is to be paid after an employee works eight (8) hours a day or forty (40) hours a week, whichever gives the employee the greater wages. At least time and one-half the base rate is required for all overtime. A laborer, workman or mechanic and an employer may enter into a written agreement or a collective bargaining agreement to work more than eight (8) hours a calendar day but not more than ten (10) hours a calendar day for the straight time hourly rate.

Wage violations or questions should be directed to the designated Engineer or the undersigned.

Steve Waddle, Director
Division of Construction Procurement
Frankfort, Kentucky 40622

PART IV
INSURANCE

INSURANCE

The Contractor shall carry the following insurance in addition to the insurance required by law:

1. Contractor's Public Liability Insurance not less than \$100,000.00 for damages arising out of bodily injuries to or death to one person. Not less than \$300,000.00 for damages arising out of bodily injuries to or death to two or more persons.
2. Contractor's Property Damages Liability Insurance. Not less than \$100,000.00 for all damages arising out of injury or destruction of property in any one accident. Not less than \$300,000.00 for all damages during the policy period.
3. Contractor's Protective Public Liability and Property Damage Insurance. The contractor shall furnish evidence with respect to operations performed for him by subcontractors that he carries in his own behalf for the above stipulated amounts.
4. The insurance required above must be evidenced by a Certificate of Insurance and this Certificate of Insurance must contain one of the following statements:
 - a. "policy contains no deductible clauses."
 - b. "policy contains _____ (amount) deductible property damage clause but company will pay claim and collect the deductible from the insured."
5. WORKMEN'S COMPENSATION INSURANCE. The contractor shall furnish evidence of coverage of all his employees or give evidence of self-insurance by submitting a copy of a certificate issued by the Workmen's Compensation Board.

PART V

STATEMENT OF INCOMPLETE WORK

STATEMENT OF INCOMPLETED WORK

All active prime contracts must be reported. This includes prime contracts with public and private owners and joint-ventured contracts. The names of the joint venturers must be shown when reporting these projects. A machine or typed listing reporting the status of each contract is acceptable when attached to this report; however, the total amounts on the itemized listing must be reported in the space provided below:

CONTRACT WITH	PROJECT IDENTIFICATION	PRIME CONTRACT AMOUNT	EARNINGS THROUGH LAST APPROVED ESTIMATE	TOTAL AMOUNT OF WORK REMAINING
TOTAL (Attach Summary if not itemized above)		\$	\$	\$

PART VI

BID ITEMS

TRANSPORTATION CABINET

Department of Highways

FRANKFORT, KY 40622

Sheet No: 1

Contract ID: 07-2918

MCCRACKEN COUNTY

FE02 073 0060 B000005N

Letting: 4/20/07

THE BIDDER MUST MAKE THE EXTENSIONS AND ADDITIONS
SHOWING TOTAL AMOUNT BID USING FIGURES ONLY

Item No.	Code No.	Item	Approximate Quantity	Unit	Unit Price Dollars	Amount Dollars
		BRIDGE			.	.
0010	02004	RELOCATE WATER-FILLED BARRIERS	800.00	LF	.	.
0020	02005	WATER-FILLED BARRIERS	800.00	LF	.	.
0030	02562	SIGNS	261.00	SQFT	.	.
0040	02650	MAINTAIN & CONTROL TRAFFIC	1.00	LS	.	.
0050	02653	LANE CLOSURE	2.00	EACH	.	.
0060	02775	FLASHING ARROW	1.00	EACH	.	.
0070	03295	EXPAN JOINT REPLACE 2 INCH	60.00	LF	.	.
0080	03298	EXPAN JOINT REPLACE 4 INCH	30.00	LF	.	.
0090	03299	ARMORED EDGE FOR CONCRETE	60.00	LF	.	.
0100	03300	ELIMINATE TRANSVERSE JOINT	300.00	LF	.	.
0110	06514	PAVE STRIPING-PERM PAINT-4 IN	1,666.00	LF	.	.
0120	06549	PAVE STRIPING-TEMP REM TAPE-B	1,599.00	LF	.	.
0130	06550	PAVE STRIPING-TEMP REM TAPE-W	3,198.00	LF	.	.
0140	06551	PAVE STRIPING-TEMP REM TAPE-Y	3,198.00	LF	.	.
0150	08150	STEEL REINFORCEMENT	3,245.00	LB	.	.
0160	08504	EPOXY SAND SLURRY	464.00	SQYD	.	.
0170	08510	REM EPOXY BIT FOREIGN OVERLAY	1,647.00	SQYD	.	.
0180	08526	CONC CLASS M FULL DEPTH PATCH	16.00	CUYD	.	.
0190	08549	BLAST CLEANING	2,136.00	SQYD	.	.
0200	20588NC	INSTALL PROJECT IDENTIFICATION SIGNS	2.00	EACH	.	.
		EITHER			.	.
0210	08534	CONCRETE OVERLAY-LATEX	81.20	CUYD	.	.
		OR			.	.
0220	08535	CONC OVERLAY-LOW SLUMP	104.10	CUYD	.	.
					.	.
		DEMOBILIZATION			.	.

TRANSPORTATION CABINET

Department of Highways

FRANKFORT, KY 40622

Sheet No: 2

Contract ID: 07-2918

MCCRACKEN COUNTY

FE02 073 0060 B000005N

Letting: 4/20/07

THE BIDDER MUST MAKE THE EXTENSIONS AND ADDITIONS
SHOWING TOTAL AMOUNT BID USING FIGURES ONLY

Item No.	Code No.	Item	Approximate Quantity	Unit	Unit Price Dollars	Amount Dollars
0230	02569	DEMOBILIZATION	1.00	LS	.	.
TOTAL BID						\$.

PART VII
CERTIFICATIONS

PROVISIONS RELATIVE TO SENATE BILL 258 (1994)

During the performance of the contract, the contractor agrees to comply with applicable provisions of:

1. KRS 136 Corporation and Utility Taxes
2. KRS 139 Sale and Use Taxes
3. KRS 141 Income Taxes
4. KRS 337 Wages and Hours
5. KRS 338 Occupational Safety and Health of Employees
6. KRS 341 Unemployment Compensation
7. KRS 342 Workers Compensation

Any final determinations of a violation by the contractor within the previous five (5) years pursuant to the applicable statutes above are revealed as follows:

NON-COLLUSION CERTIFICATION

COMMONWEALTH OF KENTUCKY

COUNTY _____

PROJECT NO. _____

I, _____, _____, under
(Name of officer signing certification) (Title)

penalty of perjury under the laws of the United States, do hereby certify that

(Insert name of Individual, Joint Venture, Co-partnership, or Corporation submitting bid)

its agent, officers or employees have not directly or indirectly entered into any agreement, participated in any collusion, or otherwise taken action in restraint of free competitive bidding in connection with this proposal.

(Signature)

(Title)

REVISED: 8-23-89

NON-COLLUSION CERTIFICATION

COMMONWEALTH OF KENTUCKY

COUNTY _____

PROJECT NO. _____

I, _____, _____, under
(Name of officer signing certification) (Title)

penalty of perjury under the laws of the United States, do hereby certify that

(Insert name of Individual, Joint Venture, Co-partnership, or Corporation submitting bid)

its agent, officers or employees have not directly or indirectly entered into any agreement, participated in any collusion, or otherwise taken action in restraint of free competitive bidding in connection with this proposal.

(Signature)

(Title)

REVISED: 8-23-89

CERTIFICATION OF BID PROPOSAL

We (I) propose to furnish all labor, equipment and materials necessary to construct and/or improve the subject project in accordance with the plans, the Transportation Cabinet's Standard Specifications for Road and Bridge Construction, current edition, special provisions, notes applicable to the project as indicated herein and all addenda issued on this project subsequent to purchase of proposal.

We (I) attach a bid proposal guaranty as provided in the special provisions in an amount not less than 5% of the total bid. We agree to execute a contract in accordance with this bid proposal within 15 calendar days after the receipt of the notice of award for the project.

We (I) have examined the site of proposed work, project plans, specifications, special provisions, and notes applicable to the project referred to herein. We understand that the quantities shown herein are estimated quantities subject to increase or decrease as provided in the specifications.

We (I) acknowledge receipt of all addendum(s) (if applicable) and have made the necessary revisions to the bid proposal. We have considered all addendum(s) in the calculation of the submitted bid and applied the updated bid items, which are included.

- No Addendum(s) have been posted

Name of Contracting Firm

BY: _____
Authorized Agent (Signature) Title

Address City State Zip Code

Telephone Number

When two or more organizations bid as a joint venture, enter names of each organization and an authorized agent for each organization must sign above.