

CALL NO. 213
CONTRACT ID. 191043
WOODFORD - SCOTT COUNTIES
FED/STATE PROJECT NUMBER 121GR19D031-BRZ
DESCRIPTION WEISENBERGER MILL ROAD (CR-1015)
WORK TYPE BRIDGE REPLACEMENT
PRIMARY COMPLETION DATE 5/1/2020

LETTING DATE: July 26,2019

Sealed Bids will be received electronically through the Bid Express bidding service until 10:00 AM EASTERN DAYLIGHT TIME July 26,2019. Bids will be publicly announced at 10:00 AM EASTERN DAYLIGHT TIME.

PLANS AVAILABLE FOR THIS PROJECT.

DBE CERTIFICATION REQUIRED - 2%

REQUIRED BID PROPOSAL GUARANTY: Not less than 5% of the total bid.

TABLE OF CONTENTS

PART I SCOPE OF WORK

- PROJECT(S), COMPLETION DATE(S), & LIQUIDATED DAMAGES
- CONTRACT NOTES
- FEDERAL CONTRACT NOTES
- ASPHALT MIXTURE
- DGA BASE
- DGA BASE FOR SHOULDERS
- INCIDENTAL SURFACING
- COMPACTION OPTION B
- SPECIAL NOTE(S) APPLICABLE TO PROJECT
- LIQUIDATED DAMAGES
- TREE REMOVAL
- BRIDGE DEMOLITION, RENOVATION
- ASBESTOS ABATEMENT REPORT
- RIGHT OF WAY NOTES
- UTILITY IMPACT & RAIL CERTIFICATION NOTES
- DEPT OF ARMY NATIONWIDE PERMIT
- KPDES STORM WATER PERMIT, BMP AND ENOI
- COMMUNICATING ALL PROMISES
- MATERIAL SUMMARY

PART II SPECIFICATIONS AND STANDARD DRAWINGS

- SPECIFICATIONS REFERENCE
- SUPPLEMENTAL SPECIFICATION
- [SN-1I] PORTABLE CHANGEABLE SIGNS
- [SN-11M] BARCODE LABEL ON PERMANENT SIGNS

PART III EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

- FEDERAL-AID CONSTRUCTION CONTRACTS FHWA 1273
- NONDISCRIMINATION OF EMPLOYEES
- EXECUTIVE BRANCH CODE OF ETHICS
- PROJECT WAGE RATES LOCALITY 3 / FEDERAL
- NOTICE OF REQUIREMENT FOR AFFIRMATIVE ACTION TO ENSURE EEO SCOTT
- NOTICE OF REQUIREMENT FOR AFFIRMATIVE ACTION TO ENSURE EEO WOODFORD

PART IV INSURANCE

PART V BID ITEMS

PART I SCOPE OF WORK

ADMINISTRATIVE DISTRICT - 07

CONTRACT ID - 191043 121GR19D031-BRZ

COUNTY - SCOTT

PCN - DE10512541931 STP BRZ 0703 (334)

WEISENBERGER MILL ROAD (CR-1015) ADDRESS DEFICIENCIES OF THE WEISENBERGER MILL ROAD BRIDGE AT THE WOODFORD/SCOTT COUNTY LINE, A DISTANCE OF 0.01 MILES.BRIDGE REPLACEMENT SYP NO. 07-08642.00.

GEOGRAPHIC COORDINATES LATITUDE 38:07:41.00 LONGITUDE 84:38:13.00

COUNTY - WOODFORD

PCN - DE12010151931 STP BRZ 0703 (334)

WEISENBERGER MILL ROAD (CR-1015) ADDRESS DEFICIENCIES OF THE WEISENBERGER MILL ROAD BRIDGE AT THE WOODFORD/SCOTT COUNTY LINE, A DISTANCE OF 0.03 MILES.BRIDGE REPLACEMENT SYP NO. 07-08642.00.

GEOGRAPHIC COORDINATES LATITUDE 38:07:41.00 LONGITUDE 84:38:13.00

COMPLETION DATE(S):

COMPLETED BY 05/01/2020 APPLIES TO ENTIRE CONTRACT

CONTRACT NOTES

PROPOSAL ADDENDA

All addenda to this proposal must be applied when calculating bid and certified in the bid packet submitted to the Kentucky Department of Highways. Failure to use the correct and most recent addenda may result in the bid being rejected.

BID SUBMITTAL

Bidder must use the Department's electronic bidding software. The Bidder must download the bid file located on the Bid Express website (www.bidx.com) to prepare a bid packet for submission to the Department. The bidder must submit electronically using Bid Express.

JOINT VENTURE BIDDING

Joint venture bidding is permissible. All companies in the joint venture must be prequalified in one of the work types in the Qualifications for Bidders for the project. The bidders must get a vendor ID for the joint venture from the Division of Construction Procurement and register the joint venture as a bidder on the project. Also, the joint venture must obtain a digital ID from Bid Express to submit a bid. A joint bid bond of 5% may be submitted for both companies or each company may submit a separate bond of 5%.

UNDERGROUND FACILITY DAMAGE PROTECTION

The contractor shall make every effort to protect underground facilities from damage as prescribed in the Underground Facility Damage Protection Act of 1994, Kentucky Revised Statute KRS 367.4901 to 367.4917. It is the contractor's responsibility to determine and take steps necessary to be in compliance with federal and state damage prevention directives. When prescribed in said directives, the contractor shall submit Excavation Locate Requests to the Kentucky Contact Center (KY811) via web ticket entry. The submission of this request does not relieve the contractor from the responsibility of contacting non-member facility owners, whom shall be contacted through their individual Protection Notification Center. Non-compliance with these directives can result in the enforcement of penalties.

REGISTRATION WITH THE SECRETARY OF STATE BY A FOREIGN ENTITY

Pursuant to KRS 176.085(1)(b), an agency, department, office, or political subdivision of the Commonwealth of Kentucky shall not award a state contract to a person that is a foreign entity required by KRS 14A.9-010 to obtain a certificate of authority to transact business in the Commonwealth ("certificate") from the Secretary of State under KRS 14A.9-030 unless the person produces the certificate within fourteen (14) days of the bid or proposal opening. If the foreign entity is not required to obtain a certificate as provided in KRS 14A.9-010, the foreign entity should identify the applicable exception. Foreign entity is defined within KRS 14A.1-070.

For all foreign entities required to obtain a certificate of authority to transact business in the Commonwealth, if a copy of the certificate is not received by the contracting agency within the time frame identified above, the foreign entity's solicitation response shall be deemed non-responsive or the awarded contract shall be cancelled.

Businesses can register with the Secretary of State at https://secure.kentucky.gov/sos/ftbr/welcome.aspx .

SPECIAL NOTE FOR PROJECT QUESTIONS DURING ADVERTISEMENT

Questions about projects during the advertisement should be submitted in writing to the Division of Construction Procurement. This may be done by fax (502) 564-7299 or email to kytc.projectquestions@ky.gov. The Department will attempt to answer all submitted questions. The Department reserves the right not to answer if the question is not pertinent or does not aid in clarifying the project intent.

The deadline for posting answers will be 3:00 pm Eastern Daylight Time, the day preceding the Letting. Questions may be submitted until this deadline with the understanding that the later a question is submitted, the less likely an answer will be able to be provided.

The questions and answers will be posted for each Letting under the heading "Questions & Answers" on the Construction Procurement website (www.transportation.ky.gov/contract). The answers provided shall be considered part of this Special Note and, in case of a discrepancy, will govern over all other bidding documents.

HARDWOOD REMOVAL RESTRICTIONS

The US Department of Agriculture has imposed a quarantine in Kentucky and several surrounding states, to prevent the spread of an invasive insect, the emerald ash borer. Hardwood cut in conjunction with the project may not be removed from the state. Chipping or burning on site is the preferred method of disposal.

INSTRUCTIONS FOR EXCESS MATERIAL SITES AND BORROW SITES

Identification of excess material sites and borrow sites shall be the responsibility of the Contractor. The Contractor shall be responsible for compliance with all applicable state and federal laws and may wish to consult with the US Fish and Wildlife Service to seek protection under Section 10 of the Endangered Species Act for these activities.

ACCESS TO RECORDS

The contractor, as defined in KRS 45A.030 (9) agrees that the contracting agency, the Finance and Administration Cabinet, the Auditor of Public Accounts, and the Legislative Research Commission, or their duly authorized representatives, shall have access to any books, documents, papers, records, or other evidence, which are directly pertinent to this contract for the purpose of financial audit or program review. Records and other prequalification information confidentially

WOODFORD - SCOTT COUNTIES 121GR19D031-BRZ

disclosed as part of the bid process shall not be deemed as directly pertinent to the contract and shall be exempt from disclosure as provided in KRS 61.878(1)(c). The contractor also recognizes that any books, documents, papers, records, or other evidence, received during a financial audit or program review shall be subject to the Kentucky Open Records Act, KRS 61.870 to 61.884.

In the event of a dispute between the contractor and the contracting agency, Attorney General, or the Auditor of Public Accounts over documents that are eligible for production and review, the Finance and Administration Cabinet shall review the dispute and issue a determination, in accordance with Secretary's Order 11-004.

April 30, 2018

FEDERAL CONTRACT NOTES

The Kentucky Department of Highways, in accordance with the Regulations of the United States Department of Transportation 23 CFR 635.112 (h), hereby notifies all bidders that failure by a bidder to comply with all applicable sections of the current Kentucky Standard Specifications, including, but not limited to the following, may result in a bid not being considered responsive and thus not eligible to be considered for award:

102.02 Current Capacity Rating 102.10 Delivery of Proposals

102.8 Irregular Proposals 102.14 Disqualification of Bidders

102.9 Proposal Guaranty

CIVIL RIGHTS ACT OF 1964

The Kentucky Department of Highways, in accordance with the provisions of Title VI of the Civil Rights Act of 1964 (78 Stat. 252) and the Regulations of the Federal Department of Transportation (49 C.F.R., Part 21), issued pursuant to such Act, hereby notifies all bidders that it will affirmatively insure that the contract entered into pursuant to this advertisement will be awarded to the lowest responsible bidder without discrimination on the ground of race, color, or national origin.

NOTICE TO ALL BIDDERS

To report bid rigging activities call: 1-800-424-9071.

The U.S. Department of Transportation (DOT) operates the above toll-free "hotline" Monday through Friday, 8:00 a.m. to 5:00 p.m. eastern time. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use the "hotline" to report such activities.

The "hotline" is part of the DOT's continuing effort to identify and investigate highway construction contract fraud and abuse and is operated under the direction of the DOT Inspector General. All information will be treated confidentially and caller anonymity will be respected.

SECOND TIER SUBCONTRACTS

Second Tier subcontracts on federally assisted projects shall be permitted. However, in the case of DBE's, second tier subcontracts will only be permitted where the other subcontractor is also a DBE. All second tier subcontracts shall have the consent of both the Contractor and the Engineer.

DISADVANTAGED BUSINESS ENTERPRISE PROGRAM

It is the policy of the Kentucky Transportation Cabinet ("the Cabinet") that Disadvantaged Business Enterprises ("DBE") shall have the opportunity to participate in the performance of highway construction projects financed in whole or in part by Federal Funds in order to create a level playing field for all businesses who wish to contract with the Cabinet. To that end, the Cabinet will comply with the regulations found in 49 CFR Part 26, and the definitions and requirements contained therein shall be adopted as if set out verbatim herein.

The Cabinet, contractors, subcontractors, and sub-recipients shall not discriminate on the basis of race, color, national origin, or sex in the performance of work performed pursuant to Cabinet contracts. The contractor shall carry out applicable requirements of 49 CFR 26 in the award and administration of federally assisted highway construction projects. The contractor will include this provision in all its subcontracts and supply agreements pertaining to contracts with the Cabinet.

Failure by the contractor to carry out these requirements is a material breach of its contract with the Cabinet, which may result in the termination of the contract or such other remedy as the Cabinet deems necessary.

DBE GOAL

The Disadvantaged Business Enterprise (DBE) goal established for this contract, as listed on the front page of the proposal, is the percentage of the total value of the contract.

The contractor shall exercise all necessary and reasonable steps to ensure that Disadvantaged Business Enterprises participate in a least the percent of the contract as set forth above as goals for this contract.

OBLIGATION OF CONTRACTORS

Each contractor prequalified to perform work on Cabinet projects shall designate and make known to the Cabinet a liaison officer who is assigned the responsibility of effectively administering and promoting an active program for utilization of DBEs.

If a formal goal has not been designated for the contract, all contractors are encouraged to consider DBEs for subcontract work as well as for the supply of material and services needed to perform this work.

Contractors are encouraged to use the services of banks owned and controlled by minorities and women.

CERTIFICATION OF CONTRACT GOAL

Contractors shall include the following certification in bids for projects for which a DBE goal has been established. BIDS SUBMITTED WHICH DO NOT INCLUDE CERTIFICATION OF DBE PARTICIPATION WILL NOT BE ACCEPTED. These bids will not be considered for award by the Cabinet and they will be returned to the bidder.

"The bidder certifies that it has secured participation by Disadvantaged Business Enterprises ("DBE") in the amount of _____ percent of the total value of this contract and that the DBE participation is in compliance with the requirements of 49 CFR 26 and the policies of the Kentucky Transportation Cabinet pertaining to the DBE Program."

The certification statement is located in the electronic bid file. All contractors must certify their DBE participation on that page. DBEs utilized in achieving the DBE goal must be certified and prequalified for the work items at the time the bid is submitted.

DBE PARTICIPATION PLAN

Lowest responsive bidders must submit the *DBE Plan/ Subcontractor Request*, form TC 14-35 DBE, within 5 days of the letting. This is necessary before the Awards Committee will review and make a recommendation. The project will not be considered for award prior to submission and approval of the apparent low bidder's DBE Plan/Subcontractor Request.

The DBE Participation Plan shall include the following:

- Name and address of DBE Subcontractor(s) and/or supplier(s) intended to be used in the proposed project;
- Description of the work each is to perform including the work item, unit, quantity, unit price and total amount of the work to be performed by the individual DBE. The Project Code Number (PCN), Category Number, and the Project Line Number can be found in the "material listing" on the Construction Procurement website under the specific letting;
- The dollar value of each proposed DBE subcontract and the percentage of total project contract value this represents. DBE participation may be counted as follows; a) If DBE suppliers and manufactures assume actual and contractual responsibility, the dollar value of materials to be furnished will be counted toward the goal as follows:
 - The entire expenditure paid to a DBE manufacturer;
 - 60 percent of expenditures to DBE suppliers that are not manufacturers provided the supplier is a regular dealer in the product involved. A regular dealer must be engaged in, as its principal business and in its own name, the sale of products to the public, maintain an inventory and own and operate distribution equipment; and
 - The amount of fees or commissions charged by the DBE firms for a bona fide service, such as professional, technical, consultant, or managerial services and assistance in the procurement of essential personnel, facilities, equipment, materials, supplies, delivery of materials and supplies or for furnishing bonds, or insurance, providing such fees or commissions are determined to be reasonable and customary.

WOODFORD - SCOTT COUNTIES 121GR19D031-BRZ

- Contract ID: 191043 Page 11 of 130
- b) The dollar value of services provided by DBEs such as quality control testing, equipment repair and maintenance, engineering, staking, etc.;
- c) The dollar value of joint ventures. DBE credit for joint ventures will be limited to the dollar amount of the work actually performed by the DBE in the joint venture;
- Written and signed documentation of the bidder's commitment to use a DBE contractor whose participation is being utilized to meet the DBE goal; and
- Written and signed confirmation from the DBE that it is participating in the contract as provided in the prime contractor's commitment.

UPON AWARD AND BEFORE A WORK ORDER WILL BE ISSUED

Contractors must submit the signed subcontract between the contractor and the DBE contractor, the DBE's certificate of insurance, and an affidavit for bidders, offerors, and contractors from the DBE to the Division of Construction Procurement. The affidavit can be found on the Construction Procurement website. If the DBE is a supplier of materials for the project, a signed purchase order and an affidavit for bidders, offerors, and contractors must be submitted to the Division of Construction Procurement.

Changes to DBE Participation Plans must be approved by the Cabinet. The Cabinet may consider extenuating circumstances including, but not limited to, changes in the nature or scope of the project, the inability or unwillingness of a DBE to perform the work in accordance with the bid, and/or other circumstances beyond the control of the prime contractor.

CONSIDERATION OF GOOD FAITH EFFORTS REQUESTS

If the DBE participation submitted in the bid by the apparent lowest responsive bidder does not meet or exceed the DBE contract goal, the apparent lowest responsive bidder must submit a Good Faith Effort Package to satisfy the Cabinet that sufficient good faith efforts were made to meet the contract goals prior to submission of the bid. Efforts to increase the goal after bid submission will not be considered in justifying the good faith effort, unless the contractor can show that the proposed DBE was solicited prior to the letting date. DBEs utilized in achieving the DBE goal must be certified and prequalified for the work items at the time the bid is submitted. One complete set and nine (9) copies of this information must be received in the office of the Division of Contract Procurement no later than 12:00 noon of the tenth calendar day after receipt of notification that they are the apparent low bidder.

Where the information submitted includes repetitious solicitation letters it will be acceptable to submit a sample representative letter along with a distribution list of the firms solicited. Documentation of DBE quotations shall be a part of the good faith effort submittal as necessary to demonstrate compliance with the factors listed below which the Cabinet considers in judging good faith efforts. This documentation may include written subcontractors' quotations, telephone log notations of verbal quotations, or other types of quotation documentation.

The Good Faith Effort Package shall include, but may not be limited to information showing evidence of the following:

- Whether the bidder attended any pre-bid meetings that were scheduled by the Cabinet to inform DBEs of subcontracting opportunities;
- Whether the bidder provided solicitations through all reasonable and available means;
- Whether the bidder provided written notice to all DBEs listed in the DBE directory at the time of the letting who are prequalified in the areas of work that the bidder will be subcontracting;
- Whether the bidder followed up initial solicitations of interest by contacting DBEs to determine with certainly whether they were interested. If a reasonable amount of DBEs within the targeted districts do not provide an intent to quote or no DBEs are prequalified in the subcontracted areas, the bidder must notify the DBE Liaison in the Office of Minority Affairs to give notification of the bidder's inability to get DBE quotes;
- Whether the bidder selected portions of the work to be performed by DBEs in order to increase the likelihood of meeting the contract goals. This includes, where appropriate, breaking out contract work items into economically feasible units to facilitate DBE participation, even when the prime contractor might otherwise perform these work items with its own forces;
- Whether the bidder provided interested DBEs with adequate and timely information about the plans, specifications, and requirements of the contract;
- Whether the bidder negotiated in good faith with interested DBEs not rejecting them as unqualified without sound reasons based on a thorough investigation of their capabilities. Any rejection should be so noted in writing with a description as to why an agreement could not be reached;
- Whether quotations were received from interested DBE firms but were rejected as unacceptable without sound reasons why the quotations were considered unacceptable. The fact that the DBE firm's quotation for the work is not the lowest quotation received will not in itself be considered as a sound reason for rejecting the quotation as unacceptable. The fact that the bidder has the ability and/or desire to perform the contract work with its own forces will not be considered a sound reason for rejecting a DBE quote. Nothing in this provision shall be construed to require the bidder to accept unreasonable quotes in order to satisfy DBE goals;
- 9 Whether the bidder specifically negotiated with subcontractors to assume part of the responsibility to meet the contract DBE goal when the work to be subcontracted includes potential DBE participation;
- Whether the bidder made any efforts and/or offered assistance to interested DBEs in obtaining the necessary equipment, supplies, materials, insurance and/or bonding to satisfy the work requirements of the bid proposal; and
- Any other evidence that the bidder submits which may show that the bidder has made reasonable good faith efforts to include DBE participation.

FAILURE TO MEET GOOD FAITH REQUIREMENT

Where the apparent lowest responsive bidder fails to submit sufficient participation by DBE firms to meet the contract goal and upon a determination by the Good Faith Committee based upon the information submitted that the apparent lowest responsive bidder failed to make sufficient reasonable efforts to meet the contract goal, the bidder will be offered the opportunity to meet in person for administrative reconsideration. The bidder will be notified of the Committee's decision within 24 hours of its decision. The bidder will have 24 hours to request reconsideration of the Committee's decision. The reconsideration meeting will be held within two days of the receipt of a request by the bidder for reconsideration.

The request for reconsideration will be heard by the Office of the Secretary. The bidder will have the opportunity to present written documentation or argument concerning the issue of whether it met the goal or made an adequate good faith effort. The bidder will receive a written decision on the reconsideration explaining the basis for the finding that the bidder did or did not meet the goal or made adequate Good Faith efforts to do so.

The result of the reconsideration process is not administratively appealable to the Cabinet or to the United States Department of Transportation.

The Cabinet reserves the right to award the contract to the next lowest responsive bidder or to rebid the contract in the event that the contract is not awarded to the low bidder as the result of a failure to meet the good faith requirement.

SANCTIONS FOR FAILURE TO MEET DBE REQUIREMENTS OF THE PROJECT

Failure by the prime contractor to fulfill the DBE requirements of a project under contract or to demonstrate good faith efforts to meet the goal constitutes a breach of contract. When this occurs, the Cabinet will hold the prime contractor accountable, as would be the case with all other contract provisions. Therefore, the contractor's failure to carry our the DBE contract requirements shall constitute a breach of contract and as such the Cabinet reserves the right to exercise all administrative remedies at its disposal including, but not limited to the following:

- Disallow credit toward the DBE goal;
- Withholding progress payments;
- Withholding payment to the prime in an amount equal to the unmet portion of the contract goal; and/or
- Termination of the contract.

PROMPT PAYMENT

The prime contractor will be required to pay the DBE within seven (7) working days after he or she has received payment from the Kentucky Transportation Cabinet for work performed or materials furnished.

CONTRACTOR REPORTING

All contractors must keep detailed records and provide reports to the Cabinet on their progress in meeting the DBE requirement on any highway contract. These records may include, but shall not be limited to payroll, lease agreements, cancelled payroll checks, executed subcontracting agreements, etc. Prime contractors will be required to complete and submit a signed and notarized affidavit (TC 18-7) and copies of checks for any monies paid to each DBE subcontractor or supplier utilized to meet a DBE goal. These documents must be submitted within 10 days of being paid by the Cabinet.

Payment information that needs to be reported includes date the payment is sent to the DBE, check number, Contract ID, amount of payment and the check date. Before Final Payment is made on this contract, the Prime Contractor will certify that all payments were made to the DBE subcontractor and/or DBE suppliers.

The Prime Contractor should supply the payment information at the time the DBE is compensated for their work. Form to use is located at: http://transportation.ky.gov/Construction/Pages/Subcontracts.aspx

The prime contractor should notify the KYTC Office of Civil Rights and Small Business Development seven (7) days prior to DBE contractors commencing work on the project. The contact is Melvin Bynes and the telephone number is (502) 564-3601.

Photocopied payments and completed, signed and notarized affidavit must be submitted by the Prime Contractor to: Office of Civil Rights and Small Business Development

6th Floor West 200 Mero Street Frankfort, KY 40622

DEFAULT OR DECERTIFICATION OF THE DBE

If the DBE subcontractor or supplier is decertified or defaults in the performance of its work, and the overall goal cannot be credited for the uncompleted work, the prime contractor may utilize a substitute DBE or elect to fulfill the DBE goal with another DBE on a different work item. If after exerting good faith effort in accordance with the Cabinet's Good Faith Effort policies and procedures, the prime contractor is unable to replace the DBE, then the unmet portion of the goal may be waived at the discretion of the Cabinet.

1/27/2017

<u>LEGAL REQUIREMENTS AND RESPONSIBILITY TO THE PUBLIC – CARGO PREFERENCE ACT (CPA).</u>

(REV 12-17-15) (1-16)

SECTION 7 is expanded by the following new Article:

102.10 <u>Cargo Preference Act – Use of United States-flag vessels.</u>

Pursuant to Title 46CFR Part 381, the Contractor agrees

- To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels.
- To furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, 'on-board' commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph 1 of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590.
- To insert the substance of the provisions of this clause in all subcontracts issued pursuant to this contract.

WOODFORD - SCOTT COUNTIES 121GR19D031-BRZ

ASPHALT MIXTURE

Unless otherwise noted, the Department estimates the rate of application for all asphalt mixtures to be 110 lbs/sy per inch of depth.

Contract ID: 191043 Page 16 of 130

DGA BASE

Unless otherwise noted, the Department estimates the rate of application for DGA Base to be 115 lbs/sy per inch of depth.

DGA BASE FOR SHOULDERS

Unless otherwise noted, the Department estimates the rate of application for DGA Base for Shoulders to be 115 lbs/sy per inch of depth. The Department will not measure necessary grading and/or shaping of existing shoulders prior to placing of DGA Base, but shall be incidental to the Contract unit price per ton for DGA Base.

Accept payment at the Contract unit price per ton as full compensation for all labor, materials, equipment, and incidentals for grading and/or shaping of existing shoulders and furnishing, placing, and compacting the DGA Base.

INCIDENTAL SURFACING

The Department has included in the quantities of asphalt mixtures established in the proposal estimated quantities required for resurfacing or surfacing mailbox turnouts, farm field entrances, residential and commercial entrances, curve widening, ramp gores and tapers, and road and street approaches, as applicable. Pave these areas to the limits as shown on Standard Drawing RPM-110-06 or as directed by the Engineer. In the event signal detectors are present in the intersecting streets or roads, pave the crossroads to the right of way limit or back of the signal detector, whichever is the farthest back of the mainline. Surface or resurface these areas as directed by the Engineer. The Department will not measure placing and compacting for separate payment but shall be incidental to the Contract unit price for the asphalt mixtures.

OPTION B

Be advised that the Department will control and accept compaction of asphalt mixtures furnished on this project under OPTION B in accordance with Sections 402 and 403.

SPECIAL NOTE

For Removal of Existing Single Span Truss Bridge Superstructure

The existing superstructure shall be removed immediately after the contract is awarded so that the substructure work may begin by the Cabinets substructure contractor. All materials of the existing bridge shall become the property of the contractor and shall be disposed of in accordance with the Current Specifications. The department will not be responsible for delays due to failure to coordinate work with the substructure rehab contractor as stated in Section 7.4 of the Special Note for Prefabricated Steel Truss Bridge and Foundations.

CodePay ItemPay Unit2731REMOVE STRUCTURELUMP SUM

SPECIAL NOTE FOR INTERPRETIVE SIGN INSTALLATION

The Contractor shall assemble and install interpretive signs as identified on plan sheet. See assembly and installation instructions attached to this special note.

The Contractor shall pick up unassembled signs at the Woodford County Maintenance Barn and assemble and install at job site. All labor and materials are incidental to unit bid price.

Pannier Exhibit Base

Assembly and Installation Instructions

For use with the following exhibit bases:





Installing a Pannier exhibit base is as easy as 1, 2, 3.

Step 1 - Inspect and Organize

As soon as your shipment arrives inspect all pieces and assembly components to make sure your delivery is complete.

For each exhibit base, the following will be included: (Figure 1)

- A. Frame Leg(s)
- Top Angle Bracket
- Exhibit Panel (Use Pannier embedded fiberglass panels for best results)
- D. 1/4" Aluminum Drive Rivets or 1/4"-20 Machine Screw
- 3/8" Aluminum Drive Rivets E.
- Frame Assembly

Assembling and installing a Pannier Exhibit Base is a straight forward process made even easier if two or more people work together using the proper tools and materials to complete the task.

Step 2 - Assembly

If you purchased your exhibit panels and bases from Pannier, most of the assembly has already been completed for you.

All you need to do is attach the exhibit pedestal base(s) to the completed panel frame assembly with the supplied buttonhead screws as shown in Figure 1. Proceed to Step 3 - Installation.


If you purchased the exhibit bases only, you will need to install your exhibit panel and attach the pedestal base(s).


To install the exhibit panel, first remove screws from the top angle. Place the frame assembly face-up on a raised sturdy work surface. Slide your exhibit panel face-up into the frame assembly channel, making sure the panel bottom matches the frame bottom as indicated by weep holes. Attach the Top Angle Bracket with supplied 1/4" drive rivets to securely enclose the exhibit panel. Insert the rivet, and drive the pin (see Figure 2) down with a hammer until flush with the head. If your exhibit base came with screws, attach the Top Angle Bracket with supplied 1/4"-20 screws to securely enclose the exhibit panel. Insert screws and screw into holes (see Figure 2) with a phillips head screw driver until inserted all the way.


Attach the completed frame assembly to the leg(s) with the 6 supplied 3/8" drive rivets. Proceed to Step 3 - Installation.

Recommended tools and materials:

- Power or manual post-hole digger
- Shovel
- Wood braces
- Hammer Clamps
- Nalls
- Plastic sheeting
- Cement
- Gravel

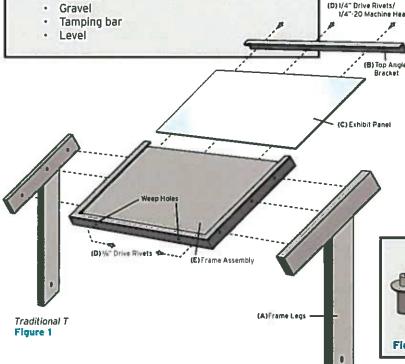







Pannier Exhibit Base Assembly and Installation Instructions

Step 3 - Installation

Move all assembled Exhibit Bases, tools and materials to the installation site. Mark the installation location using stakes or approved marking paint to indicate pedestal base locations. Prior to installation, please check the local building and signage codes as well as the applicable ADA (Americans with Disabilities Act) regulations for compliance.

installing to a permanent surface:

When installing the exhibit base with attached base plates to a permanent surface, such as concrete, use the appropriate fastening devices to provide a secure and permanent installation.

Installing in the ground:

When installing the pedestal in the ground, you will need to dig holes approximately 6" below the local frost line. We recommend that you plan your installation depth to allow for approximately 28" to 32" distance between the ground surface and the bottom of the exhibit frame assembly when finished.

Preparing the holes

Fill the completed holes with approximately 6" of gravel and tamp to provide an even and firm surface.

Protecting the exhibit base

To prevent concrete splatter from attaching to the pedestal base(s), wrap and secure plastic to the upper portion of the pedestal base(s) to protect any part which will be seen after installation.


Setting the exhibit base

Set the exhibit base in the ground, level the uprights by securing with temporary braces and clamps as shown in Figure 3. Double-check the distance from the ground surface to the exhibit frame for proper height.

Mix and fill the holes with wet cement to within 2" of the ground surface. Agitate the concrete to remove air pockets making sure to not bump or move the braced exhibit base. Carefully recheck the base level before the concrete begins to harden.

Finishing the installation

Let cement set for at least 24 hours, remove the plastic and braces, back fi II remaining holes and finish as necessary.

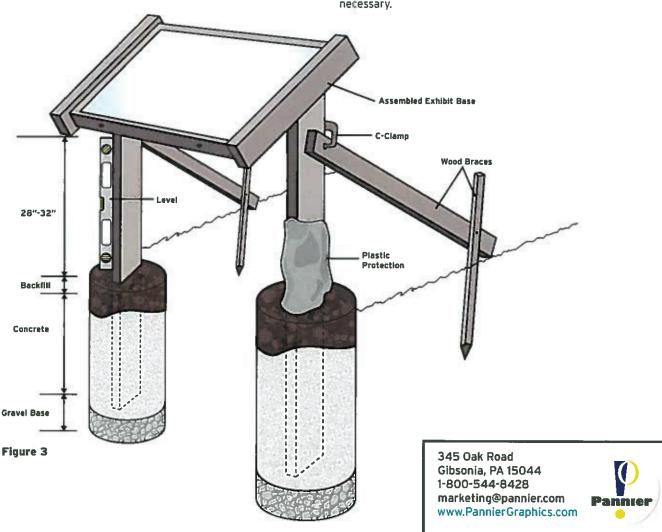

SPECIAL NOTE FOR VIBRATION MONITORING

Preconstruction Inspection

Prior to beginning construction, a pre-construction inspection shall be conducted to the Weisenberger Mill structures in Parcel 3. This inspection shall be done by a registered structural engineer or a competent inspector under the observation of a registered structural engineer. The inventory of the Mill's structural condition shall be recorded and documented to KYTC. Pre-construction inspection shall be considered incidental to the lump sum pay item "VIBRATION MONITORING".

During Construction

Prior to construction activities, the contractor shall place a seismograph at an agreed upon location between the KYTC field engineer and property owner. The seismograph shall be monitored periodically during construction activities and data reported to appropriate KYTC personnel. Stop work immediately if a reading of 0.2 Peak Particle Velocity (PPV) or higher is observed.

Bid Item

CodePay ItemPay Unit24550ECVIBRATION MONITORINGLump Sum

Special Note for Prefabricated Steel Truss Bridge and Foundations

1. GENERAL

1.1 Definitions

AASHTO: The American Association of State Highway and Transportation Officials (see their website at www.transportation.org)

Standard Specifications: The KYTC Standard Specifications for Road and Bridge Construction, current Edition.

Bridge: The prefabricated steel bridge superstructure supplied to the Contractor by the supplier and/or manufacturer. For purposes of these specifications, "Bridge" does not include any abutments, piers, or other substructure components or foundations, nor does it include any part of the roadway to be located directly upon the bridge superstructure.

Calculations: Documentation related to the analysis, design, and load rating in the form of hand computations, computer output, diagrams and summary tables in either hard copy or electronic portable document format (.pdf) files.

Contract Documents: The documents prepared by the Owner which govern the scope of work, design, manufacturing of the Bridge.

Contractor: The company responsible for installing the Bridge.

Design Loading: The specified minimum live loads governing the bridge's design.

Engineering Drawings: Drawings prepared by the Manufacturer that represent the intended engineering design including criteria and general notes. These drawings typically depict the Bridge's framing plan, elevation, member sizes, transverse section(s), end-of-bridge section(s), field assemblies, and installation notes.

Load Rating: The live load capacity of the Bridge pursuant to Applicable Codes, Standards, and statutes of the state in which the bridge is located. Load ratings shall be reported as inventory and operating.

LRFD: Load & Resistance Factor Design

Manufacturer: The firm responsible for the design, preparation of drawings, fabrication and shipping of the Bridge.

Manufacturer's Responsibilities: The work to be performed in accordance with these specifications will consist of timely furnishing of structural steel design, and shop drawings; and manufacture of the Bridge pursuant to the Applicable Codes and Standards, and transportation to the location indicated in the Contract Documents.

Owner: The legal Owner of the installed Bridge.

Shop Drawings: Drawings prepared by the Manufacturer that represent the intended fabrication of pieces and supplied items. These drawings include instructions for forming, fabricating, connecting and finishing the pieces, in the form of labels, symbols, notes, and dimensions.

Station: An increasing increment along the roadway centerline that defines the orientation of the bridge with respect to beginning and end and left and right of the project. Stations may be surveyed or arbitrarily set depending on the complexity of the project. Upstation is forward and toward the end

of the project. Downstation is rearward and toward the beginning of the project. Left and right are oriented while looking upstation.

Timely: In compliance with the time parameters of the KYTC Standard Specifications.

1.2 Manufacturer's Qualifications

AISC Certification: The Manufacturer shall be an approved steel fabricator under the AISC Quality Management System Certification Program as an Advanced Steel Bridge Fabricator including Fracture Critical and Sophisticated Paint System endorsements, for a period of at least five (5) continuous years immediately preceding the bid opening.

Experience: The Manufacturer shall have designed and manufactured at least ten (10) permanent premanufactured steel truss or rolled beam bridges of approximately the same size and configuration as the proposed Bridge during a period of not more than five (5) continuous years immediately preceding the bid opening. The Manufacturer shall also have experience designing and manufacturing bridges with all-bolted component connections using Computer Numerically Controlled (CNC) drilling equipment and shop bolting operations if approved to do so by KYTC.

1.3 Manufacturers

It is believed the following manufacturers are capable of meeting all the qualifications for the fabrication of this bridge, but this is not a comprehensive list and there are likely other manufacturers as well that meet the requirements of this note. The contractor shall be responsible for ensuring the manufacturer chosen does in fact meet all the qualifications given herein this document and the KYTC Standard Specifications for Road and Bridge Construction.

U.S. Bridge 201 Wheeling Avenue P.O. Box 757 Cambridge, Ohio 43725 (740) 432-6334 www.usbridge.com

Contech 9025 Centre Point Drive West Chester, OH 45069 1-800-338-1122 www.conteches.com

All prospective manufacturers are required to submit the following documentation supporting their ability to meet the above referenced qualifications at the time of plan and calculation review:

- Copy of current AISC certifications as described above.
- Copy of Quality Assurance Programs.
- Splicing and erection procedures.
- Approved welding process procedures.
- The name and qualifications of the Manufacturer's representative designated to represent the Manufacturer for all activities.
- The name and qualifications of the Technical Assistant that will conduct on-site assistance during field installation of the Bridge until secure and stable (if required by the contractor).
- List ten (10) permanent steel bridges similar in size and configuration to the Bridge, which the applicant has manufactured in the preceding five (5) years, together with drawings, calculations, project details and contact information.

- Complete list of plant, equipment, employees and others to be used by the applicant to design and manufacture the Bridge including copies of all Professional Engineering licenses for designers and welding certificates for welders.
- In addition to the above, submit all other items that may be required by the KYTC Standard Specifications.

Notification: The Owner will evaluate and verify the accuracy of the submittal and notify the Contractor whether the prospective Manufacturer meets the requisite qualifications. If the Owner determines that the requisite qualifications do not exist, the Manufacturer chosen by the contractor shall not be eligible for fabrication of the bridge and the contractor shall find another manufacturer that does meet all requirements. No extra payment or contract time shall be given if a fabricator chosen by the Contractor fails to meet all requirements and another fabricator must be chosen.

1.4 Bid Phase Activities

Prebid Site Visit: Each contractor submitting a bid for the work required herein this special note shall make a thorough inspection of the project site prior to submitting a bid and shall be thoroughly familiarized with existing conditions so that work can be expeditiously performed after a contract is awarded. Submission of a bid is considered evidence of this inspection having been made. Any claims resulting from site conditions will not be honored by the Department of Highways.

Pre-bid Questions: Pre-bid questions may be submitted to the Division of Construction Procurement in accordance with their typical procedures.

2. APPLICABLE CODES AND STANDARDS

2.1 Governing Codes and Standards

- The Bridge shall be designed in accordance with the current edition of the AASHTO LRFD Bridge Design Specifications, with current interims.
- The truss shall be designed for the KYHL-93 Live Load. This live load consists of the HL-93 Live Load (Truck and Lane) increased by 25%. The fatigue loading in the LRFD code shall be increased by 25% as well. In addition this truss shall be load rated and must be designed to pass 44 ton load rating for all current KYTC load rating trucks. Contact the Division of Maintenance, Bridge Maintenance Branch for the current list of required load rating trucks. The load rating shall be performed in accordance with the AASHTO Manual for Bridge Evaluation and any KY specific requirements.
- The bridge shall be fabricated and constructed in accordance with this special note and the KYTC Standard Specifications. If at any point, this note contradicts the Standard Specifications, the more stringent specification shall control.
- Micropiles shall be designed in accordance with the Special Note for Micropiles and the AASHTO LRFD Bridge Design Specifications.

2.2 Reference Codes and Standards

- American Institute of Steel Construction (AISC), Steel Construction Manual, Thirteenth Edition.
- AASHTO Manual for Bridge Evaluation, current edition.
- American Welding Society (AWS) D1.5 Bridge Welding Code (Use AWS D1.1 for welding not covered in AWS D1.5).
- Research Council on Structural Connections (RCSC) Specifications for Structural Joint Using A325 or A490 Bolts (2004).
- AASHTO/NSBA S2.1 Steel Bridge Fabrication Guide Specifications, 2nd Edition.

3. BRIDGE CHARACTERISTICS

- **3.1 Span(s):** The Bridge shall be composed of 1 span with a length between center to center of bearings estimated at 80 feet. The deck length in the roadway plans is shown as 82 feet. The bridge span may be adjusted as necessary for substructure construction, but the deck shall be at least 82 feet long unless Owner agrees to a change in length.
- **3.2 Width:** The proposed width shall be the clear roadway width between bridge railings or curb elements shall be 12 feet.
- **3.3 Skew:** The bridge shall be designed with 0 deg. skew.
- **3.4 Finish:** All structural steel shall be hot dip galvanized.
- 3.5 **Deck and Wearing Surface:** The deck shall be 8" thick minimum reinforced concrete with two layers of steel reinforcement in the transverse direction and two layers of reinforcement in the longitudinal direction. The deck shall be built at a normal crown with 2% cross slope in each direction. The design shall assume the top ½" of the deck is a wearing surface and this wearing surface shall not be counted on for strength, but dead load only. Clear cover shall be 2 ½" minimum to the top layer of steel and 1" clear cover to the bottom layer of steel. The deck may be formed utilizing stay in place forms.
- **3.6 Bridge Railings:** The bridge shall utilize the Texas T101 railing and will require a T101 guardrail transition before tying into the guardrail off each end of the bridge. See details at the end of this note for the T101 railing and transition. Include all costs for the T101 railing on the bridge and the T101 transition on each corner in the lump sum price bid for Prefabricated Steel Truss Bridge.
- 3.7 Bearings: The bridge shall utilize laminated elastomeric bearing pads with steel base and load plates. These bearings shall be designed to be replaceable and shall be protected from degradation from sunlight. Include all costs for bearings in the price for the truss.
- **Expansion Joints:** The bridge shall utilize a deck sliding over backwall joint on each end. See Section 5.6 for description.

3.9 Bridge Style in Section:

Half Through-Truss: The truss design shall be a bolted half through-truss (a.k.a. pony truss), manufactured by an approved fabricator and as further described in these specifications. The cross section shall resemble the following picture:



3.10 Bridge Style in Elevation:

The truss shall match the existing truss style as close as possible (see picture below):



The trusses shall each have a continuous top chord, a single diagonal member in each truss panel except, if possible, the center panel shall have two diagonals, inclined end posts, and a vertical member at each interior bottom chord panel point. The bottom (tension) chord of each truss shall consist of two equal-sized members with adequate section properties to provide redundancy. Such that if one member were to fail, the other would be sized sufficiently to carry the entire design load.

3.11 Bridge Style - Truss Connections:

Bolted Double Gusset Plate Connections: The truss girders shall be designed using gusset plates on each side of the chord member and high strength structural fasteners (bolts) to connect web (diagonal and vertical) members to the chord members. Shim or fill plates shall be used where web members do not dimensionally fit up with the larger chord members. Shop and field welding on truss members is prohibited.

4. ENGINEERING

- **4.1 Licensure:** The engineering design of the Bridge shall be performed by, or under the direct supervision of a Licensed Professional Engineer in Kentucky.
- **4.2 Design Specification:** The Bridge shall be designed in accordance with the current edition of the AASHTO LRFD Bridge Design Specifications.
- **4.3 Analysis:** The structural analysis for the Bridge shall include, at a minimum, a two dimensional analysis for gravity dead loads and moving live (truck) loads on transverse and longitudinal members, as applicable. Location of axle loads, lane loads, wheel loads;

and the distribution of wheel loads shall be applied as such to produce the maximum stress (or applied force) in the member or members under consideration.

Due to their configuration, a U-frame analysis is required for half-through trusses, to confirm the top chord's stability by computing the relative stiffness of the Bridge's cross sectional members to determine the resistance of the top chord members to buckling. The analysis shall follow E. C. Holt, Jr. and R. M. Barnoff's research performed for the Column Research Council, (1950-1957).

- **4.4 Bridge Information Model (BriM):** The Manufacturer may utilize three-dimensional CAD software with integrated model-data-CNC file transfer of the Bridge components and assemblies to prepare Engineering and Shop Drawings. This is to promote efficiency during plan development and to improve quality of the delivered Bridge order.
- **4.5 Load Rating:** A load rating of the Bridge's superstructure shall be supplied to the Owner at the submission of the calculations and shop plans. Requirements for the Load Rating shall be in accordance with the requirements in these notes and as required by the Division of Maintenance, Bridge Maintenance Branch. Contact the Bridge Maintenance Branch for the current load rating requirements and required trucks to load rate.
- 4.6 Loads & Load Combinations: All applicable dead and live loads shall be applied and combined as specified in the Design Specification. A future wearing surface of 15 psf shall be applied as a dead load in anticipation of possible future paving overlays. Longitudinal forces from thermal expansion and contraction, and vehicles; along with lateral forces from wind, flood or seismic events shall be computed and combined as applicable and in accordance with the Design Specification.
- 4.7 Gusset Plates: Gusset plates shall be adequately designed to transfer member forces in accordance with governing sections of the Design Specifications and FHWA Publication Number IF-09-014. All gusset plates shall have 1" radiused corners, except for the lower corners aligned toward the mid-line of the bridge. They shall be square to aid their orientation during assembly. At a minimum, the gusset plate shall be at least as thick as the thickest plate framing into the connection.
- **4.8 Camber & Deflection:** Calculation of the Bridge's dead and live load deflection is required. Live load deflection of the primary members should be limited to the span-to-deflection ratio of L/600 unless otherwise specified. Dead load deflection shall be accommodated by forming camber into the unloaded geometry of the members. Profile grade curvature shall also be taken into account when determining the fabricated (or induced) camber of the members. No camber adjustment is required for spans of less than 50 ft., except that they be fabricated with their natural mill camber as "up".

Sag, an inherent characteristic of pin-connected structures that contributes to a structure's total deflection, is due to pin and pin-hole clearance. Sag is undesirable and prohibited. Bidders with panel bridge types that sag shall be considered unresponsive and their bids will be disqualified.

- **4.9 Concrete Deck Slab:** The concrete deck slab shall be designed in accordance with the AASHTO LRFD Bridge Design Specification and KYTC specific design requirements. The slab shall be designed by the Bridge designer. Submit details and stamped calculations with the truss submittals.
- **4.10** Railings: Follow the T101 railing sheets for the rail across the bridge and tie railing into the T101 guardrail transition off each end of the bridge. Contrary to the payment notes on the example sheets at the end of this special note, the T101 railing on the bridge and the T101 transition off the ends of the bridge are incidental to the price bid for Prefabricated Steel Truss Bridge.

- **4.11 Superstructure Depth**: The new superstructure shall not impede on the current low chord elevation of the existing truss and shall be designed for the concrete deck to be the riding surface and match the proposed profile grade. The contractor shall be responsible for obtaining existing low chord elevations and ensuring this requirement is met by the Designer of the bridge.
- 4.12 Substructures: Both ends of the truss shall be founded on an end bent cap supported by drilled in micropiles. Micropiles will be provided by the Cabinet via another contractor. The micropiles provided will provide capacity for the anticipated truss loads. The end bent cap shall be designed by the bridge manufacturer or a contractor designated professional engineer to support all the design loads from the truss. Substructures shall be designed for Class A concrete (3500 psi) minimum. The cabinet will provide 5 micropiles on each end with a minimum casing diameter of 7". At a minimum, the cap shall be at least 3' wide, 3' deep, 1' wide backwall, 1'-6" wide wings, 4~#8 rebar at the top of the cap, 1~#8 rebar over the micropiles, 4~#8 rebar in the bottom of the cap, #5 closed stirrups at 12" maximum spacing, #5 rebar at 12" maximum spacing on each side face of the cap, and #5 rebar at 12" maximum spacings each direction in each face of the wings and back wall. These are the minimum dimensions and rebar required and the designer shall design this cap for all loads and adjust reinforcement as necessary for actual Contractor may need to cut off installed micropiles to make them fit the contractor designed cap at the right elevation. It is highly recommended the contractor coordinate with the Cabinet retained micropile installer to reduce rework on the micropiles. The contractor will be responsible for all rework required on the micropiles. If the cap designer finds that the provided micropiles will not work, the contractor shall provide more micropiles at no cost to the Department. Design of the micropiles should be coordinated with the Soil Nail Wall contractor retained by the cabinet so they do not conflict with the soil nails being installed. Micropiles shall be designed in accordance with AASHTO LRFD Bridge Design Specifications. Submit all PE Stamped substructure designs for review by KYTC at the same time as the truss submittals. All rebar shall be epoxy coated grade 60 conforming to ASTM A615. Existing concrete may need to be removed on the existing abutments in order to place the new substructures behind the existing abutments.

All costs for substructure construction (design services, labor, concrete, epoxy coated reinforcement, micropiles (if required), micropile verification tests (if required), concrete removal, etc) to design and construct the substructures as designed shall be included in the lump sum price bid for Prefabricated Steel Truss Bridge.

- **4.13 Connection Method:** Bolted steel connections of truss components and gusset plates provide a greater level of internal redundancy than welded connections. These connections shall be utilized within the design and fabrication process
- 4.14 Drawing Submittals: The Manufacturer shall design the prefabricated bridge(s) and prepare Drawings in accordance with the following minimum requirements. Engineering Drawings and Calculations, sealed by a Registered Professional Engineer in the state of Kentucky, will be submitted to the Owner for Approval before beginning fabrication. Shop Drawings must be submitted to the owner in accordance with the specifications and must be reviewed by the original designer as well.

Unless otherwise requested, an electronic version of the Shop Drawings will be submitted in portable document format (.PDF) via email to the Owner or the Owner's designated contact. After final approval by the Owner, the Manufacturer shall provide the Owner with two 24" x 36" paper copies of the Engineering Drawings or a .pdf for archive purposes.


5. MATERIALS & COMPONENTS

5.1 Steel: Members for vehicular bridges shall be fabricated from domestically produced, wide flange beam and/or channel shapes and steel plate conforming to ASTM A709

- Grade 50. Tubular members shall not be used. All steel shall be charpy v-notch tested to the requirements of fracture critical members, zone 2.
- **Welding:** Bridges shall be designed such that no welding is necessary for fabrication if at all possible. All connections shall be bolted connections. Any proposed welding must be shown on shop plans and must be approved by the owner.
- **5.3 Structural Fasteners:** All connections shall utilize ASTM A-325 High Strength Bolts. Galvanized bolts shall be A325 Type 1, hot dip galvanized in accordance with ASTM A-153 specifications.
- **Anchor Bolts:** The anchor bolts supplied with all bridge systems shall be ASTM A449 Full Thread Studs Hot Dip Galvanized as per ASTM A153. Each anchor bolt shall be provided with one A563 Galvanized Heavy Hex Nut and one F436 Galvanized Flat Washer.
- 5.5 Bearings: This item consists of furnishing and installing bridge bearings in accordance Contract Documents. this specification, and the manufacturer's recommendations. The bearings shall be designed in accordance with the AASHTO LRFD Bridge Design Specifications and shall follow the AASHTO LRFD Bridge Construction Specification requirements for testing and fabrication. Elastomeric and laminated elastomeric bearing pads shall be custom molded from neoprene or natural rubber. Laminated pads shall be reinforced with internal steel plates and vulcanizebonded to alternating layers of the elastomer during the molding process. Bearings shall be provided with the bridge and all costs are incidental to the lump sum price bid for the Prefabricated Steel Truss bridge.
- **Expansion Joints:** This item consists of furnishing and installing expansion joints in accordance with the Contract Documents, this specification, and the manufacturer's recommendations. The designer shall design the deck slab to be continuous over the substructures to the back face of the backwall on each substructure. The backwall should be a minimum of 1'-0" thick and the interface between the top of the backwall and the bottom of the slab shall have the bond broken with a minimum of 2 layers of 6 mil plastic. The ends of the slab shall have an armored edge embedded in accordance with Standard Drawing BJE-001, c.e. 12" wide mastic tape shall be supplied to seal the joint on the back face of the backwall between the slab and backwall. No extra payment shall be made for the armored edge, mastic tape, or the slab extension over the backwall. All costs for the armored edge, deck and mastic tape are incidental to the bridge.
- 5.7 Floor or Deck Forming System: The flooring or deck system forming system may use Stay-in-Place Forms for Concrete Decks or another system. System chosen shall be approved by the KYTC Engineer. Stay in place forms shall not be welded directly to steel truss members. Contractor shall be responsible for design, procuring, and installing SIP forms if desired to use for the deck construction. All costs incidental to the truss bridge.
- Concrete Deck Slab: The concrete deck slab shall be constructed by the Contractor. Concrete in the deck shall be Class AA concrete (4,000 psi) and shall be 8" thick minimum. Steel shall be epoxy coated grade 60 meeting requirements of ASTM A615. Concrete and reinforcing steel materials and strengths shall be noted in the Engineering Drawings. The design shall show concrete thicknesses, clear covers, and barbills for the contractors use. Concrete shall be formed, mixed, placed, consolidated, finished and cured in accordance with the KYTC Standard Specifications and as approved by the Owner in the field. The concrete deck design and construction is incidental to the lump sum price bid for Prefabricated Steel Truss Bridge.

6. MANUFACTURING AND QUALITY CONTROL

- 6.1 Certification Manual: A current copy of the AISC Program Manual describing the Bridge Manufacturer's operations and practices shall be maintained by the quality Control Manager for review by designated quality control inspectors. Copies of the AISC Certification Manual shall be made available to customers and their representatives, upon requests.
- **Cleaning and Surface Preparation:** See the Special Note for Hot Dip Galvanizing for cleaning and surface preparation requirements.
- **6.3 Cambering:** The Bridge shall be cambered in accordance with the Contract Documents and the design computations to offset the predicted total dead load deflection and to accommodate the profile grade indicated in the Contract Documents. Mechanical (cold) cambering may be used where permitted by the applicable construction specifications and the Owner's customary practices. Heat cambering by experienced workers may be employed, as an optional method.
- 6.4 Welding: If allowed, all welding shall conform to the AASHTO/AWS D1.5 Bridge Welding Code. All welding shall utilize E70 or E80 series electrodes. The weld process used shall be Flux Core Arc Welding (FCAW) or Shielded Manual Arc Welding (SMAW) per ANSI/AASHTO/AWS D1.5 "Bridge Welding Code." Welding operators shall be properly accredited and experienced. Qualifications of welders shall be made available upon request.
- **Plate & Shape Cutting:** Plate and shape cutting shall conform to methods specified in AASHTO/AWS D1.5 Bridge Welding Code Section 3 Workmanship and the KYTC Standard Specifications. Computer Numerically Controlled (CNC) cutting equipment may be utilized as a manufacturing method as it allows for highly accurate dimensional cutting along with precise and rapid shop operations. Plate and shape cutting method shall be submitted in writing to the owner for approval, prior to commencing fabrication.
- 6.6 Bolt Holes: All bolt hole fabrication for high strength, slip critical bolted connections shall conform to the workmanship requirements of the Research Council on Structural Connections (RCSC) Specifications for Structural Joint Using A325 or A490 Bolts and the KYTC Standard Specifications. Computer Numerically Controlled (CNC) drilling equipment may be utilized with approval as a manufacturing method as it allows for highly accurate hole location along with precise and rapid shop operations. Bolt hole fabrication method should be submitted in writing to the owner for approval, prior to commencing fabrication.
- 6.7 Bolting: All shop and field bolting shall comply with the AASHTO Construction Specifications, Section 11 and the Research Council on Structural Connections (RCSC) Specifications for Structural Joints Using A325 or A490 Bolts and the KYTC Specifications. Nuts shall be ASTM A563 grade DH and washers shall be ASTM F436, of corresponding finish. Shop and field bolts shall be tightened by use of Direct Tension Indicating (DTI) washers. Bolts shall be A325 Type 1 Heavy Hex head, hot-dip galvanized in accordance with ASTM A153. DTI's shall conform to ASTM F959 and shall be hot dipped galvanized as well.



Galvanized Steel Components: All steel members shall be galvanized in accordance with the Special Note for Hot Dip Galvanizing.

- 6.9 Shop Assembly: Shop assembly shall conform to AASHTO Construction Specifications and AASHTO/NSBA S2.1 Guide Specifications and the KYTC Standard Specifications. For bridges such as trusses, the Manufacturer shall shop assemble the entire span, to conform to the camber and blocking requirements shown in the Engineering Drawings in an unloaded, laydown process. If the span is too long for a complete shop assembly, the Manufacturer shall check-assemble a minimum of three adjacent shippable units of the bridge, in a sequential manner, to ensure that an accurate fit-up of assemblies are possible in the field. Complex framing members such as skewed floor beams shall also be check -assembled in the shop, to ensure geometric accuracy and fit-up has been achieved. Stringers beams, transverse bracing and accessory pieces are not required to be check-assembled to their primary members unless specified in the Contract Documents. If the KYTC Standard Specifications, requires a more stringent shop assembly process, that process shall be followed instead of the above described process.
- **6.10 Shop Inspection:** Each Bridge shall be inspected by a qualified shop inspector. For all welded assemblies the inspector shall be a Certified Weld Inspector that is qualified under the AWS QC-1 program. Each inspection shall include as a minimum requirement the following: review of Shop Drawings, weld procedures, welder qualifications and weld testing reports, visual inspection of welds and verification of overall dimensions and geometry of the Bridge. Non destructive testing of welds shall be performed both prior to and after galvanizing. All welds shall be tested in accordance with AWS D1.5.
- **6.11 Surface Preparation for Galvanizing:** See Special Note for Hot Dip Galvanizing for surface preparation requirements.
- 6.12 Material Certification: The Manufacturer shall maintain a program to receive, inspect, record and trace materials used in the Bridge. Material Test Reports shall be used to prove domesticity, and document chemistry and physical test records. Certificates of Conformance shall be used to document compliance with specifications. Traceability shall be met by heat and lot numbers records from the producing mill or supplier. This program shall be in evidence by the Manufacturer's AISC Certification and a written copy found in the Manufacturer's AISC Certification Manual.
- **6.13 Truss Assembly Records:** The Manufacturer shall complete and maintain a record of assembly for each truss bridge, documenting specific pieces, heat numbers and positions for truss girder members, in accordance with the Manufacturer's AISC Certification Manual.

7. SITE, DELIVERY & ERECTION

- 7.1 Owner responsibility: The Owner shall provide limited information about the site and soil conditions and will provide a line and grade. The engineering design and construction of the Bridge end bent construction shall be the responsibility of the Contractor and their Engineer. Pertinent information related to the design and performance of the bridge superstructure shall be made available to the Bridge Manufacturer upon execution of the agreement. The Contractor shall install anchor bolts in accordance with the Bridge Manufacturer's Engineering Drawings and recommendations (all costs for anchor bolts incidental to truss). All roadway approach work and paving of the Bridge deck roadway shall be the responsibility of the Contractor. All electrical grounding and lightning protection shall be the responsibility of the Contractor and the manufacturer. Submit proposed electrical grounding and lightning protection to the Cabinet for review.
- **7.2 Delivery:** Contractor shall be responsible for delivery coordination.
- **7.3 Erection:** The Manufacturer will advise the Contractor of the attachment points and other necessary information required to install the bridge. The method and sequence of erection

shall be the responsibility of the Manufacturer/Contractor. Unloading, stabilization, splicing, bolting, and proper rigging and lifting are the responsibility of the Contractor.

7.4 Coordination: The contractor will be responsible for coordinating with the substructure rehab contractor. End bent design should begin immediately so that micropile placement can be optimal for the new end bents. The existing superstructure shall be removed immediately after the contract is awarded so that the substructure work may begin by the Cabinets substructure contractor. The department will not be responsible for delays due to failure to coordinate work with the substructure rehab contractor.

8. TECHNICAL ASSISTANCE


8.1 The contractor may request a qualified technical assistant from the manufacturer to provide installation technical assistance. The contractor is responsible for ensuring the bridge is erected according to the Manufacturers and KYTC requirements. No extra payment will be made for this and all costs shall be incidental to the price bid for the truss bridge superstructure.


9. MEASUREMENT

9.1 The contractor shall be paid one lump sum for the truss bridge superstructure, deck, and all substructure work as described in section 4.12, designed, fabricated, and installed in accordance with this special note. No extra payment shall be made for any incidentals (materials, concrete removal, equipment, or labor) that may be required to design, fabricate, or install a truss bridge with a concrete deck in accordance with this special note and KYTC Standard Specifications.

10. BRIDGE PAYMENT

CodePay ItemPay Unit23989ECPrefabricated Steel Truss BridgeL.S.

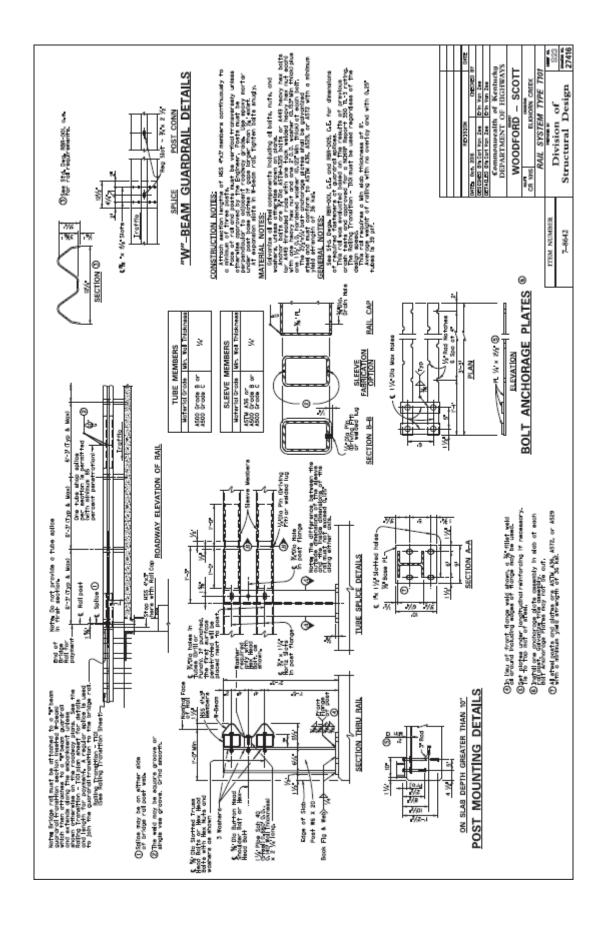

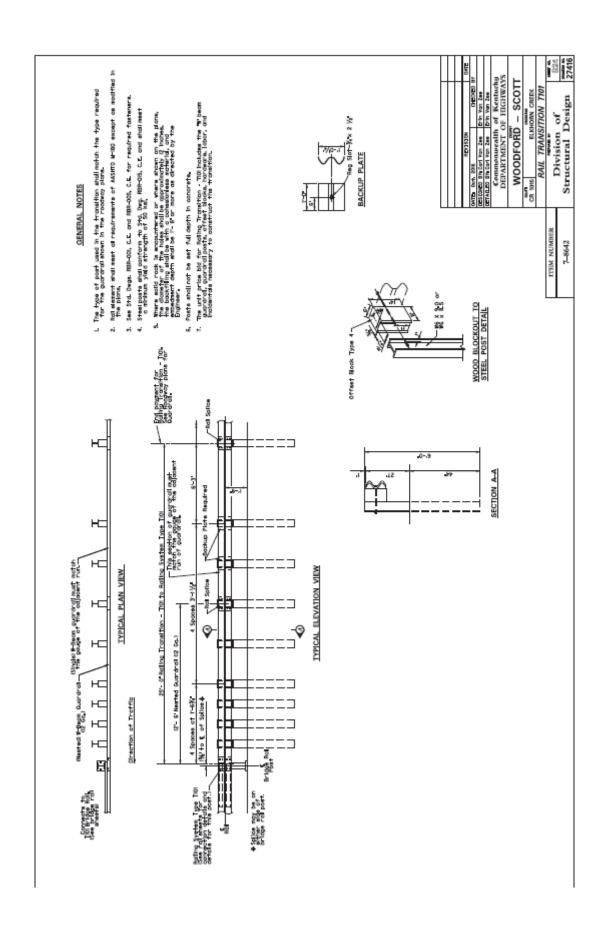

SPECIAL NOTE FOR HOT-DIP GALVANIZING STEEL

These Notes or designated portions thereof, apply where so indicated on the plans, proposals or bidding instruction.

I. DESCRIPTION. This work shall consist of surface preparation and hot-dip galvanizing structural steel specified on the plans. An additional coating system as described in Section 607.03.23 of the Specifications is not required when this note is in the included in the contract.

II. MATERIALS.

- A. Steel. Use steel specified in the plans; however, fabricator must confirm that the steel material has silicon content either below 0.4% or between 0.15% and 0.22% to ensure galvanizing will perform and bond as required. Steel material out of this range shall be rejected. This specification can only be utilized for rolled steel beam bridges (no plate girders) and associated hardware.
- **B. Zinc.** In accordance with AASHTO M111.

III. HOT-DIP GALVANIZING.

A. Application.

Steel members, fabrications and assemblies shall be galvanized by the hot-dip process in the shop according to AASHTO M111 (Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products).

Bolts, nuts, washers and steel components shall be galvanized in the shop according to AASHTO M232 (Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware).

B. Safeguarding against embrittlement, distortion, and cracking

All steel shall be safeguarded against embrittlement according to ASTM A143 (Standard Specification for Safeguarding against Embrittlement of Hot-Dip Galvanized Structural Steel Products and Procedure for Detecting Embrittlement). Water quenching or chromate conversion coatings shall not be used on any steel work that is to be painted.

All galvanized steel work shall be handled in a manner to avoid mechanical damage and minimize distortion. Members shall be supported during galvanization to prevent permanent distortion. The contractor/fabricator/galvanizer must propose changes to the element prior to preparing shop drawings if necessary to minimize the chances of permanent distortion or cracking during hot-dip galvanizing. Pre-heating must be utilized if necessary to minimize the chance of permanent distortion or cracking.

The contractor is required to inspect each element for distortion following hot-dip galvanizing prior to dipping the next element. Consult the Engineer is distortion is detected before proceeding to the next element.

C. Fabrication

Hot-dip galvanizing shall be indicated on the shop drawings. The fabricator shall coordinate with the galvanizer to incorporate additional steel detail required to facilitate galvanizing of the steel. These additional details shall be indicated on the shop drawings.

To insure identification after galvanizing, piece marks shall be supplemented with metal tags for all items where fit-up requires matching specific pieces.

After fabrication (cutting, welding, drilling, etc.) is complete, all holes shall be deburred and all fins, scabs or other surface/edge anomalies shall be ground or repaired per ASTM A6. The items shall then be cleaned per Steel Structures Painting Council's Surface Preparation Specification SSPC-SP1 (Solvent Cleaning) and SSPC-SP6 (Commercial Blast Cleaning). All surfaces shall be inspected to verify no fins, scabs or other similar defects are present.

All welded attachments shall be connected prior to hot dip galvanization, including shear studs.

Beams shall be handled, stored and transported with their webs vertical and with proper cushioning to prevent damage to the member and coating. Members shall be supported during galvanizing to prevent permanent distortion.

D. Surface Preparation

The Contractor/Fabricator shall consult with the galvanizer to insure proper removal of grease, paint and other deleterious materials prior to galvanizing. The members shall be abrasive blasted/cleaned to SSPC SP6/NACE 3 to remove all mill scale.

E. Coating Requirements

Coating weight, surface finish, appearance and adhesion shall conform to requirements of ASTM A385 (*Standard Practice for Providing High-Quality Zinc Coatings (Hot-Dip)*) and AASHTO M111 or AASHTO M232, as appropriate.

F. Testing Requirements

Inspection and testing of hot-dip galvanized coatings shall follow the guidelines provided in the American Galvanizers Association publication "Inspection of Products Hot-dip Galvanized after Fabrication". Sampling, inspection, rejection and retesting for conformance with requirements shall be according to AASHTO M111 or AASHTO M232 as applicable, with the target coating thickness of 152 microns (6 mils). Coating thickness shall be measured according to AASHTO M111, for magnetic thickness gage measurement and AASHTO M232 as appropriate. The Cabinet may elect to conduct testing in addition to the Standards required testing.

All galvanized steel will be visually inspected for finish and appearance.

Bolts, nuts, washers, and steel components shall be packaged according to AASHTO M232. Identity of bolts, nuts and washers shall be maintained for lot-testing after galvanizing according to Article 505.04(f)(2) for high strength steel bolts.

G. Connection Treatment

After galvanizing and prior to shipping, contact surfaces for any bolted connections shall be roughened by hand wire brushing or according to SSPC-SP7 (Brush-Off Blast Cleaning). Power wire brushing is not allowed.

All bolt holes shall be reamed or drilled to their specified diameters after galvanizing. All bolts shall be installed after galvanizing.

H. Repair of Hot-dip Galvanized Coating

Surfaces with inadequate zinc thickness will be repaired using zinc based solder in accordance to ASTM A780 (*Standard Practice for Repair of Damaged and Uncoated Areas of Hot-Dip Galvanized Coatings*) Section 4.2.1 and AASHTO M111. Any fins or slivers present after galvanizing will be removed and repaired ASTM A780 (Standard Practice for Repair of Damaged and Uncoated Areas of Hot-Dip Galvanized Coatings) Section 4.2.1 and AASHTO M111.

Surfaces of galvanized steel that are damaged after the galvanizing operation shall be repaired according to ASTM A780. Damage that occurs in the shop shall be repaired in the shop. Damage that occurs during transport or in the field shall be repaired in the field. Any drips or runs in the galvanizing will be removed by grinding to match the surrounding surface.

All bolt holes shall be reamed or drilled to their specified diameters after galvanizing.

The Cabinet's Project Team must inspect and approve the galvanized steel prior to the subsequent Phase of Work.

V. PAYMENT

The cost of all surface preparation, galvanizing, and all other work described herein shall be the considered as included in the lump sum price bid for Prefabricated Steel Truss Bridge.

The Department will consider payment as full compensation for all work required by these notes and detail drawings.

7-8642.00 SPECIAL NOTE FOR COMPLETION DATE

Project Fixed Completion Date:

This project shall have a fixed completion date of May 1, 2020 for the completion of **all** work associated with this project. Liquidated damages shall be assessed according to Section 108 of the 2019 Kentucky Standard Specifications for Road and Bridge Construction. Contrary to Section 108 of the 2019 Kentucky Standard Specifications for Road and Bridge Construction, contract extensions associated with this project may only be adjusted at the discretion of the Engineer.

Incentive Program for Early Completion:

The project will have an incentive program of \$75,000 for the completion of the entire project before January 1, 2020. This incentive is lump sum regardless of the number of days the project is completed before January 1, 2020.

SPECIAL NOTE

For Tree Removal

Woodford/Scott Counties Weisenberger Mill Road Bridge Replacement over Elkhorn Creek Item No. 07-8642

NO CLEARING OF TREES 5 INCHES OR GREATER (DIAMETER BREAST HEIGHT) FROM JUNE 1 – JULY 31

If there are any questions regarding this note, please contact Division of Environmental Analysis, 200 Mero Street, Frankfort, KY 40601, Phone: (502) 564-7250.

Special Note for Bridge Demolition, Renovation and Asbestos Abatement

If the project includes any bridge demolition or renovation, the successful bidder is required to notify Kentucky Division for Air Quality (KDAQ) via filing of form (DEP 7036) a minimum of 10 days prior to commencement of any bridge demolition or renovation work.

Any available information regarding possible asbestos containing materials (ACM) on or within bridges to be affected by the project has been included in the bid documents. These are to be included with the Contractor's notification filed with the KDAQ. If not included in the bid documents, the Department will provide that information to the successful bidder for inclusion in the KDAQ notice as soon as possible. If there are no documents stating otherwise, the bidders should assume there are no asbestos containing materials that will in any way affect the work.



Matthew G. Bevin Governor

COMMONWEALTH OF KENTUCKY TRANSPORTATION CABINET Frankfort, Kentucky 40622 www.transportation.kv.gov/

Greg ThomasSecretary

Asbestos Inspection Report

To: Becky Barrick

District: 7

Date: June 21, 2016

Conducted By: O'Dail Lawson

Report Prepared By: O'Dail Lawson

Project and Structure Identification

Project Number: Woodford 07-8642

Structure ID: 120C00006N

Structure Location: Wiesenberger Mill Road over South Elkhorn Creek

Sample Description: The sample collected were negative for asbestos.

Inspection Date: June 16, 2016

Results and Recommendations

The results of the samples collected were negative for the presence of asbestos above 1%. No abatement is required at this time.

It is recommended that this report accompany the 10-Day Notice of Intent for Demolition (<u>DEP7036 Form</u>) which is to be submitted to the Kentucky Division of Air Quality prior to abatement, demolition, or renovation of any building or structure in the Commonwealth.





MRS, Inc. Analytical Laboratory Division

332 West Broadway, Suite 613 Louisville, Kentucky 40202

(502) 495-1212 Fax: (502) 491-7111

Histories Merral

BULK SAMPLE ASBESTOS ANALYSIS

Analysis N#	26177	Address:	Woodford County - 07 - 8642	
Client Name:	KYTC		Bridge # 120C00006N	Т
Sampled By:	O'Dail Lawson			

				% FIBROUS ASBESTOS			% NON-ASBESTOS FIBERS		RS		
Number	Color	Layered	Fibrous	Chrysotile	Amosite	crocidolite	Others	Cellulose	Fiberglass	Syn. Fiber	Other/Mat.
W 1	Gray	Yes	No				None				100%
	ļ										
		ļ									
		<u> </u>									
		<u> </u>									
	ļ	ļ									
		<u> </u>									
	ļ							_			
				<u> </u>							

Methodology	EPA Method	600/R-93-116
-------------	------------	--------------

Date Analyzed: 19-Jun-16

Analyst : Winterford Mensah

The test relates only to the items tested. This report does not represent endorsement by NVLAP or any agency of the U.S Government. Partial Reproduction of any part of this report is strictly prohibited. Samples shall be retained for (30) days.

AIHA # 102459 AJHA #1 02459

(502) 564-7250 fax (502) 564-5655 TRANSPORTATION CABINET

Chain of Custody Record

Kentucky Transportation Cabinet 200 Mero Street, 5th Floor West Frankfort, Kentucky 40622

Preservative Page 1 Weisenberger Mill Romo over Type Cont. S. Elkhon Creek Mortin Grey Matrix Color 1200 0000 6N Samplers (signature) Analysis Requested Client Information KY TRANSPORTATION CABINET Vento ens Afterneur. KYTC COC.xlsx FTD = Filter Tampering or Damaged Fax: 502-564-5655 N/A = Not Applicable Date/Time:

OC/17/
Date/Time: ND = None Detected 07:1/1 Date/Time: Date/Time: Collected 6498-10 Results Code: Date 4/4/h O'Dail Lawson o'dail.lawson@ky.gov Project or Subject Reference Wood Forg Tron Sample ID Sample Description 200 Mero Street 502-782-5020 Morra Frankfort Received at Lab By: Relinquished By: Relinquished By: Received By: Address: 3 Phone: PO#:

ENVIRONMENTAL TRAINING CONCEPTS, INC

P.O Box 99603 Louisville, KY 40269 (502)640-2951

Certification Number: ETC-AIR-071415-00276

O'Dail Lawson

has on 07-14-2015, attended and successfully completed the requirements and passed the examination with a score of 70% of better on the entitled course.

ASBESTOS INSPECTOR REFRESHER

Training was in accordance with 40 CFR Part 763 (AHERA) approved by the Commonwealth of Kentucky, the Indiana Department of Environmental Management and Tennessee Department of Environment & Conservation The above student received requisite training for Asbestos Accreditation under Title II of the Toxic Substance Act (TSCA)

Conducted at: 1220 Kentucky Mills Drive, Louisville, KY

Name - Training Manager

1

Expiration Date: 07-14-2016

Name - Instructor

WOODFORD - SCOTT COUNTIES 121GR19D031-BRZ

Contract of the same

KENTUCKY TRANSPORTATION CABINET Department of Highways DIVISION OF RIGHT OF WAY & UTILITIES

TC 62-226 Rev. 01/2016 Page 1 of 1

Contract ID: 191043

Page 45 of 130

RIGHT OF WAY CERTIFICATION

	Original		Re-Co	ertificatio	n	RIGHT OF WAY CERTIFICATION					
	ITEM# COUNTY		COUNTY	PROJECT # (STATE) PROJECT # (FED							
7-8642	7-8642.00		Scott/W	oodford	1381 JL03 12	20 86761 01R	n/a				
PROJECT DESCRIPTION						1					
				∕Iill Road	Bridge						
Replace the Weisenberger Mill Road Bridge No Additional Right of Way Required											
Construction will be within the limits of the existing right of way. The right of way was acquired in accordance to FHWA regulations											
under the Uniform Relocation Assistance and Real Property Acquisitions Policy Act of 1970, as amended. No additional right of way or											
relocation assistance were required for this project. Condition # 1 (Additional Right of Way Required and Cleared)											
All necessary right of way, including control of access rights when applicable, have been acquired including legal and physical											
				_		-		e may be some improvements			
-				-		-		physical possession and the			
	_	_	-			•		n paid or deposited with the			
court. A	All relocation	ons hav	e beer	n relocated	I to decent, safe, and sanita	ary housing or tl	hat KYTC has made ava	ilable to displaced persons			
	-				ance with the provisions of		NA directive.				
					of Way Required with E						
_	-					_		he proper execution of the			
		-		-		•		n has not been obtained, but			
_	-							s physical possession and right			
	_			-	be paid or deposited with	-	· · · · · · · · · · · · · · · · · · ·	e court for most parcels. Just			
					of Way Required with E		to AWARD of construct	ion contract			
						•	mnlete and/or some na	rcels still have occupants. All			
	-	_		-	ent housing made available						
				-	_			necessary right of way will not			
be fully	acquired,	and/or	some	occupants	will not be relocated, and,	or the just com	pensation will not be p	paid or deposited with the			
court fo	or some pa	rcels ui	ntil aft	er bid letti	ng. KYTC will fully meet all	the requiremen	ts outlined in 23 CFR 6	35.309(c)(3) and 49 CFR			
_	24.102(j) and will expedite completion of all acquisitions, relocations, and full payments after bid letting and prior to							nd prior to			
					rce account construction.						
Total Number of Parcels on Project			-	3	EXCEPTION (S) Parcel #	ANTICIPATED DATE OF POSSESSION WITH EXPLANATION					
	Number of Parcels That Have Been Ac		<u> </u>								
	Signed Deed Condemnation			0							
	Signed ROE		0								
Notes/ Comments (Use Additional Sheet if ned		ecessary)									
LPA RW Project Manager				ject Mana	_	Right of Way Supervisor					
Printed	Printed Name		ſ	Printed Name	Cecil Smith						
Signa	ature					Signature		5-2			
Da	Date			Date 4/30/2019		1/30/2019					
Right of Way Director		or		FHWA							
Printed	d Name				F	Printed Name					
Signa	ature					Signature					
Date				Date							

Woodford County, BRZ 0703(334) 12F0 FD52 120 86761 01U Mile point: 2.499 TO 2.522

ADDRESS DEFICIENCIES OF THE WEISENBURG MILL ROAD BRIDGE AT THE WOODFORD/SCOTT COUNTY

LINE. (10CCN)(120C00006N) ITEM NUMBER: 07-8642.00

PROJECT NOTES ON UTILITIES

Please Note: The information presented in this Utility Note is informational in nature and the information contained herein is not guaranteed.

The contractor will be responsible for contacting all utility facility owners on the subject project to coordinate his activities. The contractor will coordinate his activities to minimize and, where possible, avoid conflicts with utility facilities. Due to the nature of the work proposed, it is unlikely to conflict with the existing utilities beyond minor facility adjustments. Where conflicts with utility facilities are unavoidable, the contractor will coordinate any necessary relocation work with the facility owner and Resident Engineer. The Kentucky Transportation Cabinet maintains the right to remove or alter portions of this contract if a utility conflict occurs. The utility facilities as noted in the previous section(s) have been determined using data garnered by varied means and with varying degrees of accuracy: from the facility owners, a result of S.U.E., field inspections, and/or reviews of record drawings. The facilities defined may not be inclusive of all utilities in the project scope and are not Level A quality, unless specified as such. It is the contractor's responsibility to verify all utilities and their respective locations before excavating.

The contractor shall make every effort to protect underground facilities from damage as prescribed in the Underground Facility Damage Protection Act of 1994, Kentucky Revised Statute KRS 367.4901 to 367.4917. It is the contractor's responsibility to determine and take steps necessary to be in compliance with federal and state damage prevention directives. The contractor is instructed to contact KY 811 for the location of existing underground utilities. Contact shall be made a minimum of two (2) and no more than ten (10) business days prior to excavation. The contractor shall submit Excavation Locate Requests to the Kentucky Contact Center (KY 811) via web ticket entry. The submission of this request does not relieve the contractor from the responsibility of contacting non-member facility owners, whom are to be contacted through their individual Protection Notification Center. It may be necessary for the contractor to contact the County Court Clerk to determine what utility companies have facilities in the area. Non-compliance with these directives can result in the enforcement of penalties.

Woodford County, BRZ 0703(334) 12F0 FD52 120 86761 01U Mile point: 2.499 TO 2.522

ADDRESS DEFICIENCIES OF THE WEISENBURG MILL ROAD BRIDGE AT THE WOODFORD/SCOTT COUNTY

LINE. (10CCN)(120C00006N) ITEM NUMBER: 07-8642.00

NOTE: DO NOT DISTURB THE FOLLOWING FACILITIES LOCATED WITHIN THE PROJECT DISTURB LIMITS

Kentucky Utilities Company - Electric Distribution

Crosses Weisenberger Mill Road at bridge

Windstream Communications

Telephone fiber and copper crosses Weisenberger Mill Road at bridge

The Contractor is fully responsible for protection of all utilities listed above

THE FOLLOWING FACILITY OWNERS ARE RELOCATING/ADJUSTING THEIR FACILITIES WITHIN THE PROJECT LIMITS AND WILL BE COMPLETE PRIOR TO CONSTRUCTION

Kentucky Utilities – Electric Distribution

Kentucky Utilities relocated existing lines to higher elevation at crossing of bridge

Woodford County, BRZ 0703(334) 12F0 FD52 120 86761 01U Mile point: 2.499 TO 2.522

ADDRESS DEFICIENCIES OF THE WEISENBURG MILL ROAD BRIDGE AT THE WOODFORD/SCOTT COUNTY

LINE. (10CCN)(120C00006N) ITEM NUMBER: 07-8642.00

THE FOLLOWING FACILITY OWNERS HAVE FACILITIES TO BE RELOCATED/ADJUSTED BY THE OWNER OR THEIR SUBCONTRACTOR AND IS TO BE COORDINATED WITH THE ROAD CONTRACT

Windstream Communications

Windstream Communication plans to relocate approximately 300 feet of aerial copper cable and one fiber optic cable to Kentucky Utilities poles that are located at North side of the bridge. The cabinet currently has Windstream's plans/estimate and are waiting on the requested utility funds to be approved for further processing of the agreement. Projected completion date 8/31/2019.

THE FOLLOWING FACILITY OWNERS HAVE FACILITIES TO BE RELOCATED/ADJUSTED BY THE ROAD CONTRACTOR AS INCLUDED IN THIS CONTRACT

Not Applicable

RAIL COMPANIES HAVE FACILITIES IN CONJUNCTION WITH THIS PROJECT AS NOTED

⊠ No Rail Involvement □ Rail Involved □ Rail Adjacent

AREA FACILITY OWNER CONTACT LIST

Page 3 of 4

Woodford County, BRZ 0703(334) 12F0 FD52 120 86761 01U Mile point: 2.499 TO 2.522

ADDRESS DEFICIENCIES OF THE WEISENBURG MILL ROAD BRIDGE AT THE WOODFORD/SCOTT COUNTY

LINE. (10CCN)(120C00006N) ITEM NUMBER: 07-8642.00

Facility Owner	Address	Contact	Phone	Email
		Name		
Kentucky Utilities	820 West Broadway	Caroline	5026487418	Caroline.Justice@LGE-KU.com
Company - Electric	Louisville KY 40232	Justice		
Distribution				
Windstream	130 West New Circle	Steve	8593576209	Steve.Johnson@windstream.com
Communications -	Road Lexington KY	Johnson		
Telephone	40505			

N O T I C E

DEPARTMENT OF THE ARMY CORPS OF ENGINEERS (NATIONWIDE PERMIT & GENERAL WQC AUTHORIZATION)

PROJECT: Woodford County, Item No. 7-8642.00

Bridge Maintenance

The Section 404 & 401 activities for this project have been previously permitted under the authority of the Department of the Army Nationwide Permit No. 3 "Maintenance" & Division of Water General Water Quality Certification. In order for these authorizations to be valid, the attached conditions must be followed. The contractor shall post a copy of this Nationwide Permit & General WQC in a conspicuous location at the project site for the duration of construction and comply with the general conditions as required.

To more readily expedite construction, the contractor may elect to alter the design or perform the work in a manner different from what was originally proposed and specified. Prior to commencing such alternative work, the contractor shall obtain **written** permission from the Division of Construction and the Corps of Engineers. A copy of any request to the Corps of Engineers to alter this proposal and subsequent responses shall be forwarded to the Division of Environmental Analysis, DA Permit Coordinator, for office records and for informational purposes.



DEPARTMENT OF THE ARMY

U.S. ARMY ENGINEER DISTRICT, LOUISVILLE CORPS OF ENGINEERS P.O. BOX 59 LOUISVILLE KY 40201-0059 FAX: (502) 315-6677 http://www.irl.usace.army.mil/

December 20, 2018

Regulatory Division South Branch ID No. LRL-2017-124-ncc

Mr. Roy Collins Kentucky Transportation Cabinet, DEA 200 Mero Street Frankfort, Kentucky 40622

Dear Mr. Collins:

This is in response to your request for authorization to perform in-place replacement of the Weisenberger mill Bridge and to replace approaches on KY 1015 (Weisenberger Mill Road). In addition, the project may involve the construction of a temporary low water crossing. The project would impact approximately 43 linear feet (0.05 acre) of the South Fork of Elkhorn Creek near Midway, Woodford County, Kentucky. The information supplied by you was reviewed to determine whether a Department of the Army (DA) permit will be required under the provisions of Section 404 of the Clean Water Act.

Your project is considered maintenance of a structure which has been previously authorized, either by DA Permit or by having been constructed prior to current Federal laws. Therefore, the project is authorized under the provisions of 33 CFR 330 Nationwide Permit (NWP) No. 3, Maintenance, as published in the Federal Register January 6, 2017. Under the provisions of this authorization you must comply with the enclosed Terms and General Conditions for Nationwide Permit No. 3, and the following Special Conditions:

To address impacts to the Weisenberger Bridge, the enclosed Memorandum of Agreement (MOA) between the Federal Highway Administration (FHWA), the Kentucky State Historic Preservation Office (SHPO) and the Kentucky Transportation Cabinet (KYTC) includes measures to be implemented in order to take into account the effect of the project on the bridge. The authorization under this Corps permit is conditional upon your compliance with all the terms and conditions associated with the MOA, which are incorporated by reference in this permit. Failure to comply with the MOA would constitute non-compliance with the Corps permit.

To avoid impacts to the Indiana bat and the northern long-eared bat, the permittee shall comply with the 2015 Interim Programmatic Agreement for Forest Dwelling Bats between the FHWA, KYTC and the U.S. Fish and Wildlife Service.

To compensate for impacts to the gray bat, the permittee shall implement sediment and erosion control measures as outlined in KYTC's Biological Assessment (BA) for the project (pages 10-11) that will be used to minimize potential adverse effects on gray bat foraging habitat.

You must also comply with the enclosed Water Quality Certification (WQC) Conditions for Nationwide Permit No. 3 dated March 19, 2017, issued by the Kentucky Division of Water (KDOW). Once you obtain your certification, or if no application was required, you may proceed with the project without further contact or verification from us.

This verification is valid until March 18, 2022. The enclosed Compliance Certification must be submitted to the District Engineer within 30 days of completion of the authorized activity or the implementation of any required compensatory mitigation, whichever occurs later. Note that we also perform periodic inspections to ensure compliance with our permit conditions and applicable Federal laws. A copy of this letter will be forwarded to your agent and to the KDOW.

If you have any questions, please contact this office by writing to the above address, ATTN: CELRL-RDS, or by calling Norma Condra at (502) 315-6680. All correspondence pertaining to this matter should refer to our ID No. LRL-2017-124-ncc.

Sincerely,

David Baldridge

Chief, South Branch Regulatory Division

Enclosures

ADDRESS FOR COORDINATING AGENCY

Ms. Beth Harrod Kentucky Energy & Environment Cabinet Division of Water 300 Sower Boulevard, 3rd Floor Frankfort, KY 40601

Mr. Lee Andrews U.S. Fish & Wildlife Service JC Watts Federal Building 330 West Broadway, Room 265 Frankfort, KY 40601

Mr. Craig Potts
Executive Director
State Historic Preservation Officer
Kentucky Heritage Council
300 Washington Street
Frankfort, KY 40601

Signature of Permittee

Compliance Certification:
Permit Number: LRL-2017-124-ncc
Name of Permittee: Kentucky Transportation Cabinet
Date of Issuance: December 20, 2018
Upon completion of the activity authorized by this permit and any mitigation required by this permit, sign this certification and return it to the following address:
U.S. Army Corps of Engineers CELRL-RDS P.O. Box 59 Louisville, Kentucky 40201
Please note that your permitted activity is subject to a compliance inspection by an U.S. Army Corps of Engineers representative. If you fail to comply with this permit you are subject to permit suspension, modification, or revocation.
I hereby certify that the work authorized by the above referenced permit has been completed in accordance with the terms and conditions of the said permit, and required mitigation was completed in accordance with the permit conditions.

Date

<u>Terms for Nationwide Permit No. 3</u> <u>Maintenance</u>

- (a) The repair, rehabilitation, or replacement of any previously authorized, currently serviceable structure or fill, or of any currently serviceable structure or fill authorized by 33 CFR 330.3, provided that the structure or fill is not to be put to uses differing from those uses specified or contemplated for it in the original permit or the most recently authorized modification. Minor deviations in the structure's configuration or filled area, including those due to changes in materials, construction techniques, requirements of other regulatory agencies, or current construction codes or safety standards that are necessary to make the repair, rehabilitation, or replacement are authorized. This NWP also authorizes the removal of previously authorized structures or fills. Any stream channel modification is limited to the minimum necessary for the repair, rehabilitation, or replacement of the structure or fill; such modifications, including the removal of material from the stream channel, must be immediately adjacent to the project. This NWP also authorizes the removal of accumulated sediment and debris within, and in the immediate vicinity of, the structure or fill. This NWP also authorizes the repair, rehabilitation, or replacement of those structures or fills destroyed or damaged by storms, floods, fire or other discrete events, provided the repair, rehabilitation, or replacement is commenced, or is under contract to commence, within two years of the date of their destruction or damage. In cases of catastrophic events, such as hurricanes or tornadoes, this two-year limit may be waived by the district engineer, provided the permittee can demonstrate funding, contract, or other similar delays.
- (b) This NWP also authorizes the removal of accumulated sediments and debris outside the immediate vicinity of existing structures (e.g., bridges, culverted roadcrossings, water intake structures, etc.). The removal of sediment is limited to the minimum necessary to restore the waterway in the vicinity of the structure to the approximate dimensions that existed when the structure was built, but cannot extend farther than 200 feet in any direction from the structure. This 200 foot limit does not apply to maintenance dredging to remove accumulated sediments blocking or restricting outfall and intake structures or to maintenance dredging to remove accumulated sediments from canals associated with outfall and intake structures. All dredged or excavated materials must be deposited and retained in an area that has no waters of the United States unless otherwise specifically approved by the district engineer under separate authorization.
- (c) This NWP also authorizes temporary structures, fills, and work, including the use of temporary mats, necessary to conduct the maintenance activity. Appropriate measures must be taken to maintain normal downstream flows and minimize flooding to the maximum extent practicable, when temporary structures, work, and discharges, including cofferdams, are necessary for construction activities, access fills, or dewatering of construction sites. Temporary fills must consist of materials, and be placed in a manner, that will not be eroded by expected high flows. After conducting the maintenance activity, temporary fills must be removed in their entirety and the affected areas returned to pre-construction elevations. The areas affected by temporary fills must be revegetated, as appropriate.

(d) This NWP does not authorize maintenance dredging for the primary purpose of navigation. This NWP does not authorize beach restoration. This NWP does not authorize new stream channelization or stream relocation projects.

Notification: For activities authorized by paragraph (b) of this NWP, the permittee must submit a pre-construction notification to the district engineer prior to commencing the activity (see general condition 32). The pre-construction notification must include information regarding the original design capacities and configurations of the outfalls, intakes, small impoundments, and canals. (Authorities: Section 10 of the Rivers and Harbors Act of 1899 and section 404 of the Clean Water Act (Sections 10 and 404))

Note: This NWP authorizes the repair, rehabilitation, or replacement of any previously authorized structure or fill that does not qualify for the Clean Water Act section 404(f) exemption for maintenance.



MATTHEW G. BEVIN
GOVERNOR

CHARLES G. SNAVELY

R. BRUCE SCOTT

ENERGY AND ENVIRONMENT CABINET DEPARTMENT FOR ENVIRONMENTAL PROTECTION

300 SOWER BOULEVARD FRANKFORT, KENTUCKY 40601

General Certification--Nationwide Permit # 3 Maintenance

This General Certification is issued March 19, 2017, in conformity with the requirements of Section 401 of the Clean Water Act of 1977, as amended (33 U.S.C. §1341), as well as Kentucky Statute KRS 224.16-050.

For this and all nationwide permits, the definition of surface water is as per 401 KAR 10:001 Chapter 10, Section 1(80): Surface Waters means those waters having well-defined banks and beds, either constantly or intermittently flowing; lakes and impounded waters; marshes and wetlands; and any subterranean waters flowing in well-defined channels and having a demonstrable hydrologic connection with the surface. Lagoons used for waste treatment and effluent ditches that are situated on property owned, leased, or under valid easement by a permitted discharger are not considered to be surface waters of the commonwealth.

The Commonwealth of Kentucky hereby certifies under Section 401 of the Clean Water Act (CWA) that it has reasonable assurances that applicable water quality standards under Kentucky Administrative Regulations Title 401, Chapter 10, established pursuant to Sections 301, 302, 304, 306 and 307 of the CWA, will not be violated for the activity covered under NATIONWIDE PERMIT 3, namely Maintenance, provided that the following conditions are met:

- 1. The activity will not occur within surface waters of the Commonwealth identified by the Kentucky Division of Water as Outstanding State or National Resource Water, Cold Water Aquatic Habitat, or Exceptional Waters.
- The activity will not occur within surface waters of the Commonwealth identified as perpetually-protected (e.g. deed restriction, conservation easement) mitigation sites.
- 3. The activity will impact less than 1/2 acre of wetland/marsh.
- 4. The activity will impact less than 300 linear feet of surface waters of the Commonwealth.



General Certification--Nationwide Permit # 3 Maintenance Page 2

- 5. The Kentucky Division of Water may require submission of a formal application for an individual certification for any project if the project has been determined to likely have a significant adverse effect upon water quality or degrade the waters of the Commonwealth so that existing uses of the water body or downstream waters are precluded.
- 6. Activities that do not meet the conditions of this General Water Quality Certification require an Individual Section 401 Water Quality Certification.
- 7. Activities qualifying for coverage under this General Water Quality Certification are subject to the following conditions:
 - Projects requiring in-stream stormwater detention/retention basins shall require individual water quality certifications.
 - Erosion and sedimentation pollution control plans and Best Management Practices must be designed, installed, and maintained in effective operating condition at all times during construction activities so that violations of state water quality standards do not occur.
 - Sediment and erosion control measures, such as check-dams constructed
 of any material, silt fencing, hay bales, etc., shall not be placed within
 surface waters of the Commonwealth, either temporarily or permanently,
 without prior approval by the Kentucky Division of Water's Water Quality
 Certification Section. If placement of sediment and erosion control
 measures in surface waters is unavoidable, design and placement of
 temporary erosion control measures shall not be conducted in such a
 manner that may result in instability of streams that are adjacent to,
 upstream, or downstream of the structures. All sediment and erosion
 control devices shall be removed and the natural grade restored within the
 completion timeline of the activities.
 - Measures shall be taken to prevent or control spills of fuels, lubricants, or other toxic materials used in construction from entering the watercourse.
 - Removal of riparian vegetation shall be limited to that necessary for equipment access.
 - To the maximum extent practicable, all in-stream work under this certification shall be performed under low-flow conditions.
 - Heavy equipment, e.g. bulldozers, backhoes, draglines, etc., if required for this project, should not be used or operated within the stream channel. In those instances in which such in-stream work is unavoidable, then it shall be performed in such a manner and duration as to minimize turbidity and disturbance to substrates and bank or riparian vegetation.
 - Any fill shall be of such composition that it will not adversely affect the biological, chemical, or physical properties of the receiving waters and/or cause violations of water quality standards. If rip-rap is utilized, it should be of such weight and size that bank stress or slump conditions will not be created because of its placement.

General Certification--Nationwide Permit # 3 Maintenance Page 3

- If there are water supply intakes located downstream that may be affected by increased turbidity and suspended solids, the permittee shall notify the operator when such work will be done.
- Should evidence of stream pollution or jurisdictional wetland impairment and/or violations of water quality standards occur as a result of this activity (either from a spill or other forms of water pollution), the Kentucky Division of Water shall be notified immediately by calling (800) 928-2380.

Non-compliance with the conditions of this general certification or violation of Kentucky state water quality standards may result in civil penalties.

2017 Nationwide Permits Regional and Permit-Specific Conditions COMMONWEALTH OF KENTUCKY

These regional conditions are in addition to, but do not supersede, the requirements in the Federal Register (Volume 82, No. 4 of January 6, 2017, pp 1860).

Notifications for all Nationwide Permits (NWPs) shall be in accordance with General Condition No. 32.

For activities that would impact Outstanding State or National Resource Waters
(OSNRWs), Exceptional Waters (EWs), Coldwater Aquatic Habitat Waters
(CAHs) under the Endangered Species Act for the NWPs listed below, a PreConstruction Notification (PCN) will be required to the Corps. The Corps will
coordinate with the appropriate resource agencies (see attached list) on these
NWPs (Section 404 activities), for impacts to these waters.

NWP 3 (Maintenance)

NWP 4 (Fish and Wildlife Harvesting, Enhancement, and Attraction Devices and Activities)

NWP 5 (Scientific Measurement Devices)

NWP 6 (Survey Activities)

NWP 7 (Outfall Structures and Associated Intake Structures)

NWP 12 (Utility Line Activities)

NWP 13 (Bank Stabilization)

NWP 14 (Linear Transportation Projects)

NWP 15 (U.S. Coast Guard Approved Bridges)

NWP 16 (Return Water from Upland Contained Disposal Areas)

NWP 17 (Hydropower Projects)

NWP 18 (Minor Discharges)

NWP 19 (Minor Dredging)

NWP 20 (Response Operations for Oil or Hazardous Substances)

NWP 21 (Surface Coal Mining Activities)

NWP 22 (Removal of Vessels)

NWP 23 (Approved Categorical Exclusions)

NWP 25 (Structural Discharges)

NWP 27 (Aquatic Habitat Restoration, Establishment, and Enhancement Activities)

NWP 29 (Residential Developments)

NWP 30 (Moist Soil Management for Wildlife)

NWP 31 (Maintenance of Existing Flood Control Facilities)

NWP 32 (Completed Enforcement Actions)

NWP 33 (Temporary Construction, Access, and Dewatering)

NWP 34 (Cranberry Production Activities)

NWP 36 (Boat Ramps)

NWP 37 (Emergency Watershed Protection and Rehabilitation)

NWP 38 (Cleanup of Hazardous and Toxic Waste)

NWP 39 (Commercial and Institutional Developments)

NWP 40 (Agricultural Activities)

- NWP 41 (Reshaping Existing Drainage Ditches)
- NWP 42 (Recreational Facilities)
- NWP 43 (Stormwater Management Facilities)
- NWP 44 (Mining Activities)
- NWP 45 (Repair of Uplands Damaged by Discrete Events)
- NWP 46 (Discharges in Ditches)
- NWP 48 (Commercial Shellfish Aquaculture Activities)
- NWP 49 (Coal Remining Activities)
- NWP 50 (Underground Coal Mining Activities)
- NWP 51 (Land-Based Renewable Energy Generation Facilities)
- NWP 52 (Water-Based Renewable Energy Generation Pilot Projects)
- NWP 53 (Removal of Low-Head Dams)
- NWP 54 (Living Shorelines)
- 2. In addition to the notification and agency coordination requirements in the NWPs, for impacts greater than 0.25 acres in all "waters of the U.S." for the NWPs listed below, a PCN will be required to the Corps. The Corps will coordinate with the appropriate resource agencies (see attached list) on these NWPs:
 - NWP 3 (Maintenance)
 - NWP 7 (Outfall Structures and Associated Intake Structures)
 - NWP 12 (Utility Line Activities)
 - NWP 14 (Linear Transportation Projects)
 - NWP 29 (Residential Developments)
 - NWP 39 (Commercial and Institutional Developments)
 - NWP 40 (Agricultural Activities)
 - NWP 41 (Reshaping Existing Drainage Ditches)
 - NWP 42 (Recreational Facilities)
 - NWP 43 (Stormwater Management Facilities)
 - NWP 44 (Mining Activities)
 - NWP 51 (Land-Based Renewable Energy Generation Facilities)
 - NWP 52 (Water-Based Renewable Energy Generation Pilot Projects)
 - NWP 53 (Removal of Low-Head Dams)
- 3. For activities in all "waters of the U.S." for the NWPs listed below, a PCN will be required to the Corps. The Corps will coordinate with the appropriate resource agencies (see attached list) on these NWPs:
 - NWP 21 (Surface Coal Mining Activities)
 - NWP 27 (Aquatic Habitat Restoration, Establishment & Enhancement Activities)
 - NWP 49 (Coal Remining Activities)
 - NWP 50 (Underground Coal Mining Activities)
- 4. Nationwide Permit No. 14 Linear Transportation Projects.
 - (a) New road alignments or realignments are limited to a permanent loss of 500 linear feet of intermittent or perennial stream length at each crossing. Road crossings with permanent losses greater than 500 linear feet of intermittent or perennial stream associated with new

- alignments or realignments will be evaluated as an individual permit (i.e., a Letter of Permission or as a Standard Individual Permit).
- (b) In addition to the notification requirements contained in NWP 14, the permittee must submit a PCN to the district engineer prior to commencing the activity for the permanent loss of greater than 300 feet of ephemeral, intermittent and perennial stream of all "waters of the U.S." (See General Condition 32 and the definition of "loss of waters of the United States" in the Nationwide Permits for further information.)
- 5. Notification in accordance with General Condition 32 is required to the Corps for all activities which are subject to jurisdiction under Section 10 of the Rivers and Harbors Act of 1899 (33 U.S.C. 403).
- 6. All applications are required as both a paper copy and in an electronic media format, including electronic mail or compact disc.
- 7. For all activities, the applicant shall review the U.S. Fish and Wildlife Service's IPaC website: http://ecos.fws.gov/ipac to determine if the activity might affect threatened and/or endangered species or designated critical habitat. If federally-listed species or designated critical habitat are identified, a PCN in accordance with General Condition 18 and 32 would be triggered and the official species list generated from the IPaC website must be submitted with the PCN.

Further information:

Outstanding State or National Resource Water (OSNRWs), Exceptional Waters (EWs), and Coldwater Aquatic Habitat Waters (CAHs) are waters designated by the Commonwealth of Kentucky, Natural Resources and Environmental Protection Cabinet. The list can be found at the following link: http://eppcapp.ky.gov/spwaters/

Information on Pre-Construction Notification (PCN) can be found at NWP General Condition No. 32 in the Federal Register (Volume 81, No. 105 of June 1, 2017, pp 35211).

COORDINATING RESOURCE AGENCIES

Chief, Wetlands Regulatory Section U.S. Environmental Protection Agency Region IV Atlanta Federal Center 61 Forsyth Street, SW Atlanta, Georgia 30303

Supervisor
U.S. Fish & Wildlife Service
JC Watts Federal Building, Room 265
330 West Broadway
Frankfort, Kentucky 40601

Supervisor 401 Water Quality Certification Kentucky Division of Water 300 Sower Boulevard, 3rd Floor Frankfort, KY 40601

Commissioner
Department of Fish and Wildlife Resources
#1 Game Farm Road
Frankfort, Kentucky 40601

Executive Director and State Historic Preservation Officer Kentucky Heritage Council 410 High Street Frankfort, Kentucky 40601

ADDITIONAL COORDINATING RESOURCE AGENCY FOR NWPS 21, 49, AND 50

Kentucky Department for Natural Resources Division of Mine Permits 300 Sower Boulevard Frankfort, KY 40601



Kentucky Transportation Cabinet Highway District 7

And

____(2), Construction

Kentucky Pollutant Discharge Elimination System Permit KYR10 Best Management Practices (BMP) plan

Groundwater protection plan

For Highway Construction Activities

For

Scott / Woodford County

Weisenberger Mill Bridge

Project: CID ## - ####

KPDES BMP Plan Page 1 of 15

Project information

Note -(1) = Design (2) = Construction (3) = Contractor

- 1. Owner Kentucky Transportation Cabinet, District 7
- 2. Resident Engineer: (2)
- 3. Contractor name: (2)
 Address: (2)

Phone number: (2)

Contact: (2)

Contractors agent responsible for compliance with the KPDES permit requirements (3):

- 4. Project Control Number (2)
- 5. Route: Weisenberger Mill Road
- 6. Latitude/Longitude: 38/07/41 North, 84/38/13 West
- 7. County: Scott / Woodford
- 8. Project start date (date work will begin): (2)
- 9. Projected completion date: (2)

A. Site description:

- 1. Nature of Construction Activity: Bridge Replacement with Grade and Drain Plans
- 2. Order of major soil disturbing activities (2) and (3)
- 3. Projected volume of material to be moved: 18 Excavation & 6 Embankment
- 4. Estimate of total project area: 0.391 acres
- 5. Estimate of area to be disturbed: 0.391 acres
- 6. Post construction runoff coefficient will be included in the project drainage folder. Persons needing information pertaining to the runoff coefficient will contact the resident engineer to request this information.(1)
- 7. Data describing existing soil condition (1) & (2)
- 8. Data describing existing discharge water quality (if any) (1) & (2)
- 9. Receiving water name: South Elkhorn Creek
- 10. TMDLs and Pollutants of Concern in Receiving Waters: (1 DEA)
- 11. Site map Project layout sheet plus the erosion control sheets in the project plans that depict Disturbed Drainage Areas (DDAs) and related information. These sheets depict the existing project conditions with areas delineated by DDA (drainage area bounded by watershed breaks and right of way limits), the storm water discharge locations (either as a point discharge or as overland flow) and the areas that drain to each discharge point. These plans define the limits of areas to be disturbed and the location of control measures. Controls will be either site specific as designated by the designer or will be annotated by the contractor and resident engineer before disturbance commences. The project layout sheet shows the surface waters and wetlands.

12. Potential sources of pollutants:

The primary source of pollutants is solids that are mobilized during storm events. Other sources of pollutants include oil/fuel/grease from servicing

KPDES BMP Plan Page 3 of 15

and operating construction equipment, concrete washout water, sanitary wastes and trash/debris. (3)

B. Sediment and Erosion Control Measures:

1. Plans for highway construction projects will include erosion control sheets that depict Disturbed Drainage Areas (DDAs) and related information. These plan sheets will show the existing project conditions with areas delineated by DDA within the right of way limits, the discharge points and the areas that drain to each discharge point. Project managers and designers will analyze the DDAs and identify Best Management Practices (BMPs) that are site specific. The balance of the BMPs for the project will be listed in the bid documents for selection and use by the contractor on the project with approval by the resident engineer.

Projects that do not have DDAs annotated on the erosion control sheets will employ the same concepts for development and managing BMP plans.

- 2. Following award of the contract, the contractor and resident engineer will annotate the erosion control sheets showing location and type of BMPs for each of the DDAs that will be disturbed at the outset of the project. This annotation will be accompanied by an order of work that reflects the order or sequence of major soil moving activities. The remaining DDAs are to be designated as "Do Not Disturb" until the contractor and resident engineer prepare the plan for BMPs to be employed. The initial BMP's shall be for the first phase (generally Clearing and Grubbing) and shall be modified as needed as the project changes phases. The BMP Plan will be modified to reflect disturbance in additional DDA's as the work progresses. All DDA's will have adequate BMP's in place before being disturbed.
- 3. As DDAs are prepared for construction, the following will be addressed for the project as a whole or for each DDA as appropriate:
 - ➤ Construction Access This is the first land-disturbing activity. As soon as construction begins, bare areas will be stabilized with gravel and temporary mulch and/or vegetation.
 - At the beginning of the project, all DDAs for the project will be inspected for areas that are a source of storm water pollutants. Areas that are a source of pollutants will receive appropriate cover or BMPs to arrest the introduction of pollutants into storm water.

KPDES BMP Plan Page 4 of 15

Areas that have not been opened by the contractor will be inspected periodically (once per month) to determine if there is a need to employ BMPs to keep pollutants from entering storm water.

- Clearing and Grubbing The following BMP's will be considered and used where appropriate.
 - Leaving areas undisturbed when possible.
 - Silt basins to provide silt volume for large areas.
 - Silt Traps Type A for small areas.
 - Silt Traps Type C in front of existing and drop inlets which are to be saved
 - Diversion ditches to catch sheet runoff and carry it to basins or traps or to divert it around areas to be disturbed.
 - Brush and/or other barriers to slow and/or divert runoff.
 - Silt fences to catch sheet runoff on short slopes. For longer slopes, multiple rows of silt fence may be considered.
 - Temporary Mulch for areas which are not feasible for the fore mentioned types of protections.
 - Non-standard or innovative methods.
- Cut & Fill and placement of drainage structures The BMP Plan will be modified to show additional BMP's such as:
 - Silt Traps Type B in ditches and/or drainways as they are completed
 - Silt Traps Type C in front of pipes after they are placed
 - Channel Lining
 - Erosion Control Blanket
 - Temporary mulch and/or seeding for areas where construction activities will be ceased for 21 days or more.
 - Non-standard or innovative methods
- ➤ Profile and X-Section in place The BMP Plan will be modified to show elimination of BMP's which had to be removed and the addition of new BMP's as the roadway was shaped. Probably changes include:
 - Silt Trap Type A, Brush and/or other barriers, Temporary Mulch, and any other BMP which had to be removed for final grading to take place.
 - Additional Silt Traps Type B and Type C to be placed as final drainage patterns are put in place.
 - Additional Channel Lining and/or Erosion Control Blanket.
 - Temporary Mulch for areas where Permanent Seeding and Protection cannot be done within 21 days.
 - Special BMP's such as Karst Policy
- Finish Work (Paving, Seeding, Protect, etc.) A final BMP Plan will result from modifications during this phase of construction. Probably changes include:

KPDES BMP Plan Page 5 of 15

- Removal of Silt Traps Type B from ditches and drainways if they are protected with other BMP's which are sufficient to control erosion, i.e. Erosion Control Blanket or Permanent Seeding and Protection on moderate grades.
- Permanent Seeding and Protection
- Placing Sod
- Planting trees and/or shrubs where they are included in the project
- ➢ BMP's including Storm Water Management Devices such as velocity dissipation devices and Karst policy BMP's to be installed during construction to control the pollutants in storm water discharges that will occur after construction has been completed are: NONE (1)

C. Other Control Measures

 No solid materials, including building materials, shall be discharged to waters of the commonwealth, except as authorized by a Section 404 permit.

2. Waste Materials

All waste materials that may leach pollutants (paint and paint containers, caulk tubes, oil/grease containers, liquids of any kind, soluble materials, etc.) will be collected and stored in appropriate covered waste containers. Waste containers shall be removed from the project site on a sufficiently frequent basis as to not allow wastes to become a source of pollution. All personnel will be instructed regarding the correct procedure for waste disposal. Wastes will be disposed in accordance with appropriate regulations. Notices stating these practices will be posted in the office.

3. Hazardous Waste

All hazardous waste materials will be managed and disposed of in the manner specified by local or state regulation. The contractor shall notify the Section Engineer if there any hazardous wastes being generated at the project site and how these wastes are being managed. Site personnel will be instructed with regard to proper storage and handling of hazardous wastes when required. The Transportation Cabinet will file for generator, registration when appropriate, with the Division of Waste Management and advise the contractor regarding waste management requirements.

4. Spill Prevention

The following material management practices will be used to reduce the risk of spills or other exposure of materials and substances to the weather and/or runoff.

Good Housekeeping:

The following good housekeeping practices will be followed onsite during the construction project.

- An effort will be made to store only enough product required to do the job
- All materials stored onsite will be stored in a neat, orderly manner in their appropriate containers and, if possible, under a roof or other enclosure
- Products will be kept in their original containers with the original manufacturer's label
- Substances will not be mixed with one another unless recommended by the manufacturer
- Whenever possible, all of the product will be used up before disposing of the container
- Manufacturers' recommendations for proper use and disposal will be followed
- The site contractor will inspect daily to ensure proper use and disposal of materials onsite

Hazardous Products:

These practices will be used to reduce the risks associated with any and all hazardous materials.

- Products will be kept in original containers unless they are not resealable
- Original labels and material safety data sheets (MSDS) will be reviewed and retained
- Contractor will follow procedures recommended by the manufacturer when handling hazardous materials
- If surplus product must be disposed of, manufacturers' or state/local recommended methods for proper disposal will be followed

The following product-specific practices will be followed onsite:

Petroleum Products:

Vehicles and equipment that are fueled and maintained on site will be monitored for leaks, and receive regular preventative maintenance to reduce the chance of

KPDES BMP Plan Page 7 of 15

leakage. Petroleum products onsite will be stored in tightly sealed containers, which are clearly labeled and will be protected from exposure to weather.

The contractor shall prepare an Oil Pollution Spill Prevention Control and Countermeasure plan when the project that involves the storage of petroleum products in 55 gallon or larger containers with a total combined storage capacity of 1,320 gallons. This is a requirement of 40 CFR 112.

This project (will / will not) (3) have over 1,320 gallons of petroleum products with a total capacity, sum of all containers 55 gallon capacity and larger.

> Fertilizers:

Fertilizers will be applied at rates prescribed by the contract, standard specifications or as directed by the resident engineer. Once applied, fertilizer will be covered with mulch or blankets or worked into the soil to limit exposure to storm water. Storage will be in a covered shed. The contents of any partially used bags of fertilizer will be transferred to a sealable plastic bin to avoid spills.

> Paints:

All containers will be tightly sealed and stored indoors or under roof when not being used. Excess paint or paint wash water will not be discharged to the drainage or storm sewer system but will be properly disposed of according to manufacturers' instructions or state and local regulations.

Concrete Truck Washout:

Concrete truck mixers and chutes will not be washed on pavement, near storm drain inlets, or within 75 feet of any ditch, stream, wetland, lake, or sinkhole. Where possible, excess concrete and wash water will be discharged to areas prepared for pouring new concrete, flat areas to be paved that are away from ditches or drainage system features, or other locations that will not drain off site. Where this approach is not possible, a shallow earthen wash basin will be excavated away from ditches to receive the wash water

> Spill Control Practices

In addition to the good housekeeping and material management practices discussed in the previous sections of this plan, the following practices will be followed for spill prevention and cleanup:

 Manufacturers' recommended methods for spill cleanup will be clearly posted. All personnel will be made aware of procedures and the location of the information and cleanup supplies.

KPDES BMP Plan Page 8 of 15

- Materials and equipment necessary for spill cleanup will be kept in the material storage area. Equipment and materials will include as appropriate, brooms, dust pans, mops, rags, gloves, oil absorbents, sand, sawdust, and plastic and metal trash containers.
- All spills will be cleaned up immediately after discovery.
- The spill area will be kept well ventilated and personnel will wear appropriate protective clothing to prevent injury from contract with a hazardous substance.
- Spills of toxic or hazardous material will be reported to the appropriate state/local agency as required by KRS 224 and applicable federal law.
- The spill prevention plan will be adjusted as needed to prevent spills from reoccurring and improve spill response and cleanup.
- Spills of products will be cleaned up promptly. Wastes from spill clean up will be disposed in accordance with appropriate regulations.

D. Other State and Local Plans

This BMP plan shall include any requirements specified in sediment and erosion control plans, storm water management plans or permits that have been approved by other state or local officials. Upon submittal of the NOI, other requirements for surface water protection are incorporated by reference into and are enforceable under this permit (even if they are not specifically included in this BMP plan). This provision does not apply to master or comprehensive plans, non-enforceable guidelines or technical guidance documents that are not identified in a specific plan or permit issued for the construction site by state or local officials. (1)

E. Maintenance

- 1. The BMP plan shall include a clear description of the maintenance procedures necessary to keep the control measures in good and effective operating condition.
- Maintenance of BMPs during construction shall be a result of weekly and post rain event inspections with action being taken by the contractor to correct deficiencies.
- Post Construction maintenance will be a function of normal highway maintenance operations. Following final project acceptance by the cabinet, county highway crews will be responsible for identification and correction of deficiencies regarding ground cover and cleaning of storm water BMPs. The project manager shall identify any BMPs that will be for the purpose of post construction storm water management with specific guidance for any non-routine maintenance. (1)

F. Inspections

Inspection and maintenance practices that will be used to maintain erosion and sediment controls:

- All erosion prevention and sediment control measures will be inspected at least once each week and following any rain of one-half inch or more.
- ➤ Inspections will be conducted by individuals that have successfully completed the KEPSC-RI course as required by Section 213.02.02 of the Standard Specifications for Road and Bridge Construction, current edition.
- Inspection reports will be written, signed, dated, and kept on file.
- Areas at final grade will be seeded and mulched within 14 days.
- Areas that are not at final grade where construction has ceased for a period of 21 days or longer and soil stock piles shall receive temporary mulch no later than 14 days from the last construction activity in that area.
- All measures will be maintained in good working order; if a repair is necessary, it will be initiated within 24 hours of being reported.
- ➤ Built-up sediment will be removed from behind the silt fence before it has reached halfway up the height of the fence.
- > Silt fences will be inspected for bypassing, overtopping, undercutting, depth of sediment, tears, and to ensure attachment to secure posts.

KPDES BMP Plan Page 10 of 15

- ➤ Sediment basins will be inspected for depth of sediment, and built-up sediment will be removed when it reaches 50 percent of the design capacity and at the end of the job.
- ➤ Diversion dikes and berms will be inspected and any breaches promptly repaired. Areas that are eroding or scouring will be repaired and re-seeded / mulched as needed.
- ➤ Temporary and permanent seeding and mulching will be inspected for bare spots, washouts, and healthy growth. Bare or eroded areas will be repaired as needed.
- All material storage and equipment servicing areas that involve the management of bulk liquids, fuels, and bulk solids will be inspected weekly for conditions that represent a release or possible release of pollutants to the environment.

G. Non – Storm Water discharges

It is expected that non-storm water discharges may occur from the site during the construction period. Examples of non-storm water discharges include:

- Water from water line flushings.
- Water form cleaning concrete trucks and equipment.
- Pavement wash waters (where no spills or leaks of toxic or hazardous materials have occurred).
- Uncontaminated groundwater and rain water (from dewatering during excavation).

All non-storm water discharges will be directed to the sediment basin or to a filter fence enclosure in a flat vegetated infiltration area or be filtered via another approved commercial product.

H. Groundwater Protection Plan (3)

This plan serves as the groundwater protection plan as required by 401 KAR 5:037.

Contractors statement: (3)

The following activities, as enumerated by 401 KAR 5:037 Section 2 that require the preparation and implementation of a groundwater protection plan, will or may be may be conducted as part of this construction project:

KPDES BMP Plan Page 11 of 15

2. (e) land treatment or land disposal of a pollutant;
2. (f) Storing,, or related handling of hazardous waste, solid waste of special waste,, in tanks, drums, or other containers, or in piles, (This does not include wastes managed in a container placed for collection and removal of municipal solid waste for disposal off site);
2. (g) Handling of materials in bulk quantities (equal or greater than 55 gallons or 100 pounds net dry weight transported held in an individual container) that, if released to the environment, would be a pollutant;
2. (j) Storing or related handling of road oils, dust suppressants,, at a central location;
2. (k) Application or related handling of road oils, dust suppressants or deicing materials, (does not include use of chloride-based deicing materials applied to roads or parking lots);
2. (m) Installation, construction, operation, or abandonment of wells, bore holes, or core holes, (this does not include bore holes for the purpose of explosive demolition);
Or, check the following only if there are no qualifying activities
There are no activities for this project as listed in 401 KAR 5:037 Section 2 that require the preparation and implementation of a groundwater protection plan.
The contractor is responsible for the preparation of a plan that addresses the
401 KAR 5:037 Section 3. (3) Elements of site specific groundwater protection plan:
 (a) General information about this project is covered in the Project information; (b) Activities that require a groundwater protection plan have been identified above; (c) Practices that will protect groundwater from pollution are
(0) I radioco trat will proteot groundwater from polition are

(d) Implementation schedule – all practices required to prevent pollution of groundwater are to be in place prior to conducting the activity;
(e) Training is required as a part of the ground water protection

(e) Training is required as a part of the ground water protection plan. All employees of the contractor, sub-contractor and resident engineer personnel will be trained to understand the nature and requirements of this plan as they pertain to their job

KPDES BMP Plan Page 12 of 15

addressed in section C. Other control measures.

function(s). Training will be accomplished within one week of employment and annually thereafter. A record of training will be maintained by the contractor with a copy provide to the resident engineer.

- (f) Areas of the project and groundwater plan activities will be inspected as part of the weekly sediment and erosion control inspections
- (g) Certification (see signature page.)

Contractor and Resident Engineer Plan certification

The contractor that is responsible for implementing this BMP plan is identified in the Project Information section of this plan.

The following certification applies to all parties that are signatory to this BMP plan:

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. Further, this plan complies with the requirements of 401 KAR 5:037. By this certification, the undersigned state that the individuals signing the plan have reviewed the terms of the plan and will implement its provisions as they pertain to ground water protection.

Resident Engineer and Contractor Certification:

(2) Resident Engine	eer signature		
Signed Typed or	title printed name²	,signature	
(3) Signed	title rinted name¹	, signature	

- 1. Contractors Note: to be signed by a person who is the owner, a responsible corporate officer, a general partner or the proprietor or a person designated to have the authority to sign reports by such a person in accordance with 401 KAR 5:060 Section 9. This delegation shall be in writing to: Manager, KPDES Branch, Division of Water, 14 Reilly Road, Frankfort Kentucky 40601. Reference the Project Control Number (PCN) and KPDES number when one has been issued.
- 2. KyTC note: to be signed by the Chief District Engineer or a person designated to have the authority to sign reports by such a person (usually the resident engineer) in accordance with 401 KAR 5:060 Section 9. This delegation shall be in writing to: Manager, KPDES Branch, Division of Water, 14 Reilly Road, Frankfort Kentucky 40601 Reference the Project Control Number (PCN) and KPDES number when one has been issued.

Subcontractor

KyTC BMP Plan for Project CID ## -

Sub-Contractor Certification


The following sub-contractor shall be made aware of the BMP plan and responsible for implementation of BMPs identified in this plan as follows:

	Name: Address: Address:
	Phone:
The pa	art of BMP plan this subcontractor is responsible to implement is:
Kentud discha discha	penalty of law that I understand the terms and conditions of the general utant Discharge Elimination System permit that authorizes the storm water le BMP plan that has been developed to manage the quality of water to be a result of storm events associated with the construction site activity and of non-storm water pollutant sources identified as part of this certification. Little d or printed name Contractor Note: to be signed by a person who is the owner, a pole corporate officer, a general partner or the proprietor or a person and to have the authority to sign reports by such a person in ce with 401 KAR 5:060 Section 9. This delegation shall be in writing
Signed	dtitle, Typed or printed name¹ signature
res de ac to:	Sub Contractor Note: to be signed by a person who is the owner, a sponsible corporate officer, a general partner or the proprietor or a person signated to have the authority to sign reports by such a person in cordance with 401 KAR 5:060 Section 9. This delegation shall be in writing Manager, KPDES Branch, Division of Water, 14 Reilly Road, Frankfort entucky 40601. Reference the Project Control Number (PCN) and KPDES

number when one has been issued.





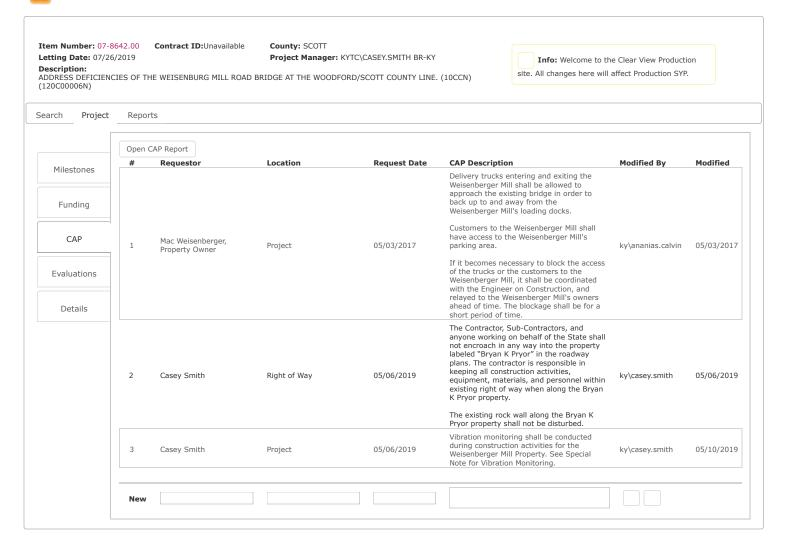

MATERIAL SUMMARY

CONTRACT ID: 191043	121GR19D031-BRZ	DE10512541931
301111A01 ID. 1310 1 3	IZ I GIN I SDOS I - DINZ	DE 10312341331

WEISENBERGER MILL ROAD (CR-1015) ADDRESS DEFICIENCIES OF THE WEISENBERGER MILL ROAD BRIDGE AT THE WOODFORD/SCOTT COUNTY LINE BRIDGE REPLACEMENT, A DISTANCE OF .01 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0160	00001	DGA BASE	35.00	TON
0165	00212	CL2 ASPH BASE 1.00D PG64-22	37.00	TON
0170	00301	CL2 ASPH SURF 0.38D PG64-22	6.00	TON
0175	02014	BARRICADE-TYPE III	3.00	EACH
0180	02200	ROADWAY EXCAVATION	15.00	CUYD
0185	02242	WATER	.50	MGAL
0190	02351	GUARDRAIL-STEEL W BEAM-S FACE	75.00	LF
0195	02369	GUARDRAIL END TREATMENT TYPE 2A	2.00	EACH
0200	02381	REMOVE GUARDRAIL	98.00	LF
0205	02562	TEMPORARY SIGNS	40.50	SQFT
0210	02671	PORTABLE CHANGEABLE MESSAGE SIGN	1.00	EACH
0215	02701	TEMP SILT FENCE	50.00	LF
0220	05952	TEMP MULCH	554.00	SQYD
0225	05953	TEMP SEEDING AND PROTECTION	415.00	SQYD
0230	05963	INITIAL FERTILIZER	.03	TON
0235	05964	MAINTENANCE FERTILIZER	.04	TON
0240	05985	SEEDING AND PROTECTION	769.00	SQYD
0245	05989	SPECIAL SEEDING CROWN VETCH	62.00	SQYD
0250	05992	AGRICULTURAL LIMESTONE	.51	TON
0255	02545	CLEARING AND GRUBBING - 0.217 ACRES- SCOTT	1.00	LS
0260	02726	STAKING - SCOTT	1.00	LS
0265	02720	SIDEWALK-4 IN CONCRETE	7.00	SQYD
0270	03287	SIDEWALK RAMP TYPE 1	1.00	EACH
0275	08003	FOUNDATION PREPARATION - SCOTT	1.00	LS
0280	24550EC	VIBRATION MONITORING - SCOTT	1.00	LS
0285	23158ES505	DETECTABLE WARNINGS	10.00	SQFT
0290	24601EC	INSTALL - INTERPRETIVE SIGNS	2.00	EACH
0295	06406	SBM ALUM SHEET SIGNS .080 IN	8.50	SQFT
0300	06407	SBM ALUM SHEET SIGNS .125 IN	23.00	SQFT
0305	06410	STEEL POST TYPE 1	40.00	LF
0310	24631EC	BARCODE SIGN INVENTORY	4.00	EACH
0315	02569	DEMOBILIZATION	1.00	LS

MATERIAL SUMMARY

CONTRACT ID: 191043	121GR19D031-BRZ	DE12010151931
JUNINACI ID. 131043	12 IGK 19003 1-BKZ	DE 12010131331

WEISENBERGER MILL ROAD (CR-1015) ADDRESS DEFICIENCIES OF THE WEISENBERGER MILL ROAD BRIDGE AT THE WOODFORD/SCOTT COUNTY LINE BRIDGE REPLACEMENT, A DISTANCE OF .03 MILES.

Project Line No	Bid Code	DESCRIPTION	Quantity	Unit
0005	00001	DGA BASE	14.00	TON
0010	00212	CL2 ASPH BASE 1.00D PG64-22	14.00	TON
0015	00301	CL2 ASPH SURF 0.38D PG64-22	3.00	TON
0020	02014	BARRICADE-TYPE III	3.00	EACH
0025	02200	ROADWAY EXCAVATION	3.00	CUYD
0030	02242	WATER	.50	MGAL
0035	02351	GUARDRAIL-STEEL W BEAM-S FACE	100.00	LF
0040	02369	GUARDRAIL END TREATMENT TYPE 2A	2.00	EACH
0045	02381	REMOVE GUARDRAIL	91.00	LF
0050	02545	CLEARING AND GRUBBING - 0.174 ACRES	1.00	LS
0055	02562	TEMPORARY SIGNS	40.50	SQFT
0060	02671	PORTABLE CHANGEABLE MESSAGE SIGN	1.00	EACH
0065	02701	TEMP SILT FENCE	40.00	LF
0070	02704	SILT TRAP TYPE B	2.00	EACH
0075	02707	CLEAN SILT TRAP TYPE B	2.00	EACH
0800	02726	STAKING - WOODFORD	1.00	LS
0085	02731	REMOVE STRUCTURE - WOODFORD	1.00	LS
0090	05952	TEMP MULCH	246.00	SQYD
0095	05953	TEMP SEEDING AND PROTECTION	185.00	SQYD
0100	05963	INITIAL FERTILIZER	.01	TON
0105	05964	MAINTENANCE FERTILIZER	.02	TON
0110	05985	SEEDING AND PROTECTION	273.00	SQYD
0115	05989	SPECIAL SEEDING CROWN VETCH	96.00	SQYD
0120	05992	AGRICULTURAL LIMESTONE	.23	TON
0125	08003	FOUNDATION PREPARATION - WOODFORD	1.00	LS
0130	23989EC	PRECAST STEEL TRUSS BRIDGE - WOODFORD	1.00	LS
0135	06406	SBM ALUM SHEET SIGNS .080 IN	8.50	SQFT
0140	06407	SBM ALUM SHEET SIGNS .125 IN	23.00	SQFT
0145	06410	STEEL POST TYPE 1	80.00	LF
0150	24631EC	BARCODE SIGN INVENTORY	6.00	EACH
0155	02569	DEMOBILIZATION	1.00	LS

PART II

SPECIFICATIONS AND STANDARD DRAWINGS

SPECIFICATIONS REFERENCE

Any reference in the plans or proposal to previous editions of the Standard Specifications for Road and Bridge Construction and Standard Drawings are superseded by Standard Specifications for Road and Bridge Construction, Edition of 2019 and Standard Drawings, Edition of 2016.

SUPPLEMENTAL SPECIFICATIONS

The contractor shall use the Supplemental Specifications that are effective at the time of letting. The Supplemental Specifications can be found at the following link:

 $\underline{http://transportation.ky.gov/Construction/Pages/Kentucky-Standard-Specifications.aspx}$

1**I**

SPECIAL NOTE FOR PORTABLE CHANGEABLE MESSAGE SIGNS

This Special Note will apply when indicated on the plans or in the proposal.

1.0 DESCRIPTION. Furnish, install, operate, and maintain variable message signs at the locations shown on the plans or designated by the Engineer. Remove and retain possession of variable message signs when they are no longer needed on the project.

2.0 MATERIALS.

2.1 General. Use LED Variable Message Signs Class I, II, or III, as appropriate, from the Department's List of Approved Materials.

Unclassified signs may be submitted for approval by the Engineer. The Engineer may require a daytime and nighttime demonstration. The Engineer will make a final decision within 30 days after all required information is received.

2.2 Sign and Controls. All signs must:

- Provide 3-line messages with each line being 8 characters long and at least 18 inches tall. Each character comprises 35 pixels.
- Provide at least 40 preprogrammed messages available for use at any time.
 Provide for quick and easy change of the displayed message; editing of the message; and additions of new messages.
- 3) Provide a controller consisting of:
 - a) Keyboard or keypad.
 - b) Readout that mimics the actual sign display. (When LCD or LCD type readout is used, include backlighting and heating or otherwise arrange for viewing in cold temperatures.)
 - c) Non-volatile memory or suitable memory with battery backup for storing pre-programmed messages.
 - d) Logic circuitry to control the sequence of messages and flash rate.
- 4) Provide a serial interface that is capable of supporting complete remote control ability through land line and cellular telephone operation. Include communication software capable of immediately updating the message, providing complete sign status, and allowing message library queries and updates.
- 5) Allow a single person easily to raise the sign to a satisfactory height above the pavement during use, and lower the sign during travel.
- 6) Be Highway Orange on all exterior surfaces of the trailer, supports, and controller cabinet.
- 7) Provide operation in ambient temperatures from -30 to + 120 degrees Fahrenheit during snow, rain and other inclement weather.
- 8) Provide the driver board as part of a module. All modules are interchangeable, and have plug and socket arrangements for disconnection and reconnection. Printed circuit boards associated with driver boards have a conformable coating to protect against moisture.
- 9) Provide a sign case sealed against rain, snow, dust, insects, etc. The lens is UV stabilized clear plastic (polycarbonate, acrylic, or other approved material) angled to prevent glare.
- 10) Provide a flat black UV protected coating on the sign hardware, character PCB, and appropriate lens areas.
- 11) Provide a photocell control to provide automatic dimming.

1**I**

- 12) Allow an on-off flashing sequence at an adjustable rate.
- 13) Provide a sight to aim the message.
- 14) Provide a LED display color of approximately 590 nm amber.
- 15) Provide a controller that is password protected.
- 16) Provide a security device that prevents unauthorized individuals from accessing the controller.
- 17) Provide the following 3-line messages preprogrammed and available for use when the sign unit begins operation:

 $/KEEP/RIGHT/\Rightarrow\Rightarrow\Rightarrow/$ /MIN/SPEED/**MPH/ /ICY/BRIDGE/AHEAD/ /ONE /KEEP/LEFT/< LANE/BRIDGE/AHEAD/ /LOOSE/GRAVEL/AHEAD/ /ROUGH/ROAD/AHEAD/ /RD WORK/NEXT/**MILES/ /MERGING/TRAFFIC/AHEAD/ /TWO WAY/TRAFFIC/AHEAD/ /NEXT/***/MILES/ /PAINT/CREW/AHEAD/ /HEAVY/TRAFFIC/AHEAD/ /REDUCE/SPEED/**MPH/ /SPEED/LIMIT/**MPH/ /BRIDGE/WORK/***0 FT/ /BUMP/AHEAD/ /MAX/SPEED/**MPH/ /TWO/WAY/TRAFFIC/ /SURVEY/PARTY/AHEAD/

*Insert numerals as directed by the Engineer.

Add other messages during the project when required by the Engineer.

2.3 Power.

- Design solar panels to yield 10 percent or greater additional charge than sign consumption. Provide direct wiring for operation of the sign or arrow board from an external power source to provide energy backup for 21 days without sunlight and an on-board system charger with the ability to recharge completely discharged batteries in 24 hours.
- **3.0 CONSTRUCTION.** Furnish and operate the variable message signs as designated on the plans or by the Engineer. Ensure the bottom of the message panel is a minimum of 7 feet above the roadway in urban areas and 5 feet above in rural areas when operating. Use Class I, II, or III signs on roads with a speed limit less than 55 mph. Use Class I or II signs on roads with speed limits 55 mph or greater.

Maintain the sign in proper working order, including repair of any damage done by others, until completion of the project. When the sign becomes inoperative, immediately repair or replace the sign. Repetitive problems with the same unit will be cause for rejection and replacement.

Use only project related messages and messages directed by the Engineer, unnecessary messages lessen the impact of the sign. Ensure the message is displayed in either one or 2 phases with each phase having no more than 3 lines of text. When no message is needed, but it is necessary to know if the sign is operable, flash only a pixel.

When the sign is not needed, move it outside the clear zone or where the Engineer directs. Variable Message Signs are the property of the Contractor and shall be removed from the project when no longer needed. The Department will not assume ownership of these signs.

4.0 MEASUREMENT. The final quantity of Variable Message Sign will be

1I

the actual number of individual signs acceptably furnished and operated during the project. The Department will not measure signs replaced due to damage or rejection.

5.0 PAYMENT. The Department will pay for the Variable Message Signs at the unit price each. The Department will not pay for signs replaced due to damage or rejection. Payment is full compensation for furnishing all materials, labor, equipment, and service necessary to, operate, move, repair, and maintain or replace the variable message signs. The Department will make payment for the completed and accepted quantities under the following:

CodePay ItemPay Unit02671Portable Changeable Message SignEach

Effective June 15, 2012

SPECIAL NOTE FOR BARCODE LABEL ON PERMANENT SIGNS

- **1.0 DESCRIPTION.** Install barcode label on sheeting signs. Section references herein are to the Department's Standard Specifications for Road and Bridge Construction, current edition.
- **2.0 MATERIALS.** The Department will provide the Contractor with a 2 inch x 1 inch foil barcode label for each permanent sheeting sign. A unique number will be assigned to each barcode label.

The Contractor shall contact the Operations and Pavement Management Branch in the Division of Maintenance at (502) 564-4556 to obtain the barcode labels.

3.0 CONSTRUCTION. Apply foil barcode label in the lower right quadrant of the sign back. Signs where the bottom edge is not parallel to the ground, the lowest corner of the sign shall serve as the location to place the barcode label. The barcode label shall be placed no less than one-inch and no more than three inches from any edge of the sign. The barcode must be placed so that the sign post does not cover the barcode label.

Barcodes shall be applied in an indoor setting with a minimum air temperature of 50°F or higher. Prior to application of the barcode label, the back of the sign must be clean and free of dust, oil, etc. If the sign is not clean, an alcohol swab shall be used to clean the area. The area must be allowed to dry prior to placement of the barcode label.

Data for each sign shall include the barcode number, MUTCD reference number, sheeting manufacturer, sheeting type, manufacture date, color of primary reflective surface, installation date, latitude and longitude using the North American Datum of 1983 (NAD83) or the State Plane Coordinates using an x and y ordinate of the installed location.

Data should be provided electronically on the TC 71-229 Sign Details Information and TC 71-230 Sign Assembly Information forms. The Contractor may choose to present the data in a different format provided that the information submitted to the Department is equivalent to the information required on the Department TC forms. The forms must be submitted in electronic format regardless of which type of form is used. The Department will not accept PDF or handwritten forms. These completed forms must be submitted to the Department prior to final inspection of the signs. The Department will not issue formal acceptance for the project until the TC 71-229 and TC-230 electronic forms are completed for all signs and sign assemblies on the project.

4.0 MEASUREMENT. The Department will measure all work required for the installation of the barcode label and all work associated with completion and submission of the sign inventory data (TC 71-229 and TC 71-230).


The installation of the permanent sign will be measured in accordance to Section 715.


5.0 PAYMENT. The Department will make payment for the completed and accepted quantities under the following:


CodePay ItemPay Unit24631ECBarcode Sign InventoryEach

The Department will not make payment for this item until all barcodes are installed and sign inventory is complete on every permanent sign installed on the project. The Department will make payment for installation of the permanent sign in accordance to Section 715. The Department will consider payment as full compensation for all work required under this special note.


One Sign Post

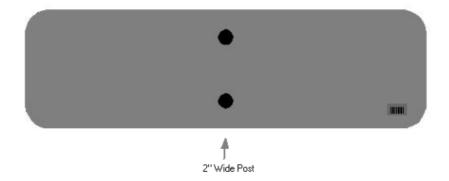




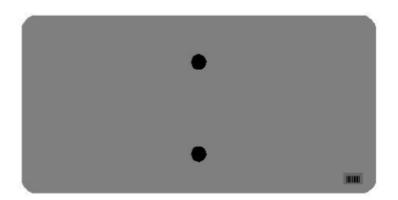


One Sign Post

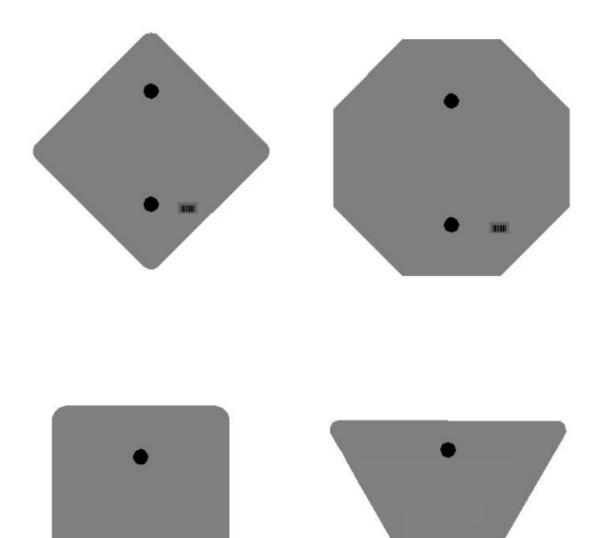



One Sign Post

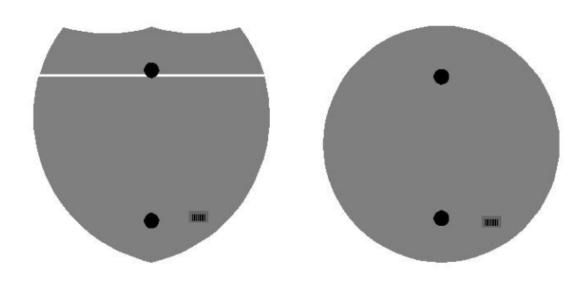




Double Sign Post

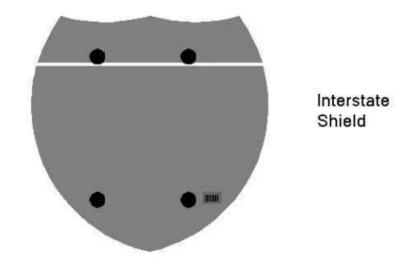


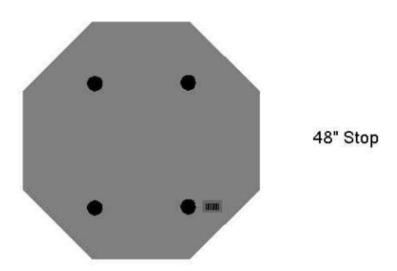

2 Post Signs

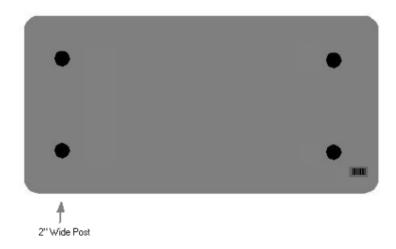



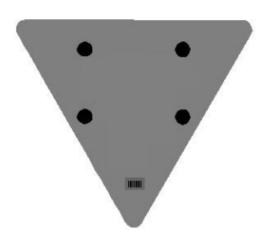

PART III

EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

FHWA-1273 -- Revised May 1, 2012

REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS

- I. General
- II. Nondiscrimination
- III. Nonsegregated Facilities
- IV. Davis-Bacon and Related Act Provisions
- Contract Work Hours and Safety Standards Act Provisions
- VI. Subletting or Assigning the Contract
- VII. Safety: Accident Prevention
- VIII. False Statements Concerning Highway Projects
- IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
- Compliance with Governmentwide Suspension and Debarment Requirements
- Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Form FHWA-1273 must be included in all Federal-aid designbuild contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

- 3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.
- 4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding \$10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under

this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

- a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.
- b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

- 2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so
- 3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:
- a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.
- b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.
- c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.
- d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.
- e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

- **4. Recruitment:** When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.
- a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.
- b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.
- c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.
- **5. Personnel Actions:** Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:
- a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.
- b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.
- c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.
- d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are

applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

- b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).
- c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.
- d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.
- 7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:
- a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.
- b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.
- c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.
- d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.
- 8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar

with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

- 9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.
- a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.
- b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurance Required by 49 CFR 26.13(b):

- a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.
- b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.
- 11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.
- a. The records kept by the contractor shall document the following:
- (1) The number and work hours of minority and nonminority group members and women employed in each work classification on the project;
 - (2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and
 - (3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;
- b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor

will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding \$2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions

of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH-1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

- b.(1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:
 - (i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and
 - (ii) The classification is utilized in the area by the construction industry; and
 - (iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.
 - (2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.
 - (3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or

will notify the contracting officer within the 30-day period that additional time is necessary.

- (4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.
- c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.
- d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. Withholding

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federallyassisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. Payrolls and basic records

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-

Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

- b.(1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g., the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site at http://www.dol.gov/esa/whd/forms/wh347instr.htm or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency...
- (2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:
 - (i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;
 - (ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;
 - (iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

- (3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH–347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.
- (4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.
- c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

- **5. Compliance with Copeland Act requirements.** The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.
- **6. Subcontracts.** The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.
- **7. Contract termination: debarment.** A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.
- 8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.
- 9. Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility.

- a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).
- b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).
- c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

- 1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.
- 2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.
- 3. Withholding for unpaid wages and liquidated damages. The FHWA or the contacting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this
- 4. Subcontracts. The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

- 1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).
- a. The term "perform work with its own organization" refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:
- the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
- (2) the prime contractor remains responsible for the quality of the work of the leased employees;
- (3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
- (4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.
- b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.
- 2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.
- 3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.
- 4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is

evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

- This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.
- 1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.
- 2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).
- 3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

T h i s p r o v i s i o n i s applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

- 1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.
- 2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost \$25,000 or more – as defined in 2 CFR Parts 180 and 1200.

1. Instructions for Certification - First Tier Participants:

- a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.
- b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this

covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

- c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.
- d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.
- e. The terms "covered transaction," "debarred,"
 "suspended," "ineligible," "participant," "person," "principal,"
 and "voluntarily excluded," as used in this clause, are defined
 in 2 CFR Parts 180 and 1200. "First Tier Covered
 Transactions" refers to any covered transaction between a
 grantee or subgrantee of Federal funds and a participant (such
 as the prime or general contract). "Lower Tier Covered
 Transactions" refers to any covered transaction under a First
 Tier Covered Transaction (such as subcontracts). "First Tier
 Participant" refers to the participant who has entered into a
 covered transaction with a grantee or subgrantee of Federal
 funds (such as the prime or general contractor). "Lower Tier
 Participant" refers any participant who has entered into a
 covered transaction with a First Tier Participant or other Lower
 Tier Participants (such as subcontractors and suppliers).
- f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.
- g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.
- h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

- i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
- j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

- a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:
- Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;
- (2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;
- (3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and
- (4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.
- b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. Instructions for Certification - Lower Tier Participants:

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost \$25,000 or more - 2 CFR Parts 180 and 1200)

- a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.
- b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which

this transaction originated may pursue available remedies, including suspension and/or debarment.

- c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.
- d. The terms "covered transaction," "debarred,"
 "suspended," "ineligible," "participant," "person," "principal,"
 and "voluntarily excluded," as used in this clause, are defined
 in 2 CFR Parts 180 and 1200. You may contact the person to
 which this proposal is submitted for assistance in obtaining a
 copy of those regulations. "First Tier Covered Transactions"
 refers to any covered transaction between a grantee or
 subgrantee of Federal funds and a participant (such as the
 prime or general contract). "Lower Tier Covered Transactions"
 refers to any covered transaction under a First Tier Covered
 Transaction (such as subcontracts). "First Tier Participant"
 refers to the participant who has entered into a covered
 transaction with a grantee or subgrantee of Federal funds
 (such as the prime or general contractor). "Lower Tier
 Participant" refers any participant who has entered into a
 covered transaction with a First Tier Participant or other Lower
 Tier Participants (such as subcontractors and suppliers).
- e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.
- f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.
- g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.
- h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
- i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the

department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

- 1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.
- 2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 (49 CFR 20).

- 1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:
- a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.
- b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.
- 2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.
- 3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

ATTACHMENT A - EMPLOYMENT AND MATERIALS PREFERENCE FOR APPALACHIAN DEVELOPMENT HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS ROAD CONTRACTS

This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

- 1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:
- a. To the extent that qualified persons regularly residing in the area are not available.
- b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.
- c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.
- 2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.
- 3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.
- 4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.
- 5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

KENTUCKY TRANSPORTATION CABINET DEPARTMENT OF HIGHWAYS

EMPLOYMENT REQUIREMENTS RELATING TO NONDISCRIMINATION OF EMPLOYEES (APPLICABLE TO FEDERAL-AID SYSTEM CONTRACTS)

AN ACT OF THE KENTUCKY GENERAL ASSEMBLY TO PREVENT DISCRIMINATION IN EMPLOYMENT

KRS CHAPTER 344 EFFECTIVE JUNE 16, 1972

The contract on this project, in accordance with KRS Chapter 344, provides that during the performance of this contract, the contractor agrees as follows:

- 1. The contractor shall not fail or refuse to hire, or shall not discharge any individual, or otherwise discriminate against an individual with respect to his compensation, terms, conditions, or privileges of employment, because of such individual's race, color, religion, national origin, sex, disability or age (forty and above); or limit, segregate, or classify his employees in any way which would deprive or tend to deprive an individual of employment opportunities or otherwise adversely affect his status as an employee, because of such individual's race, color, religion, national origin, sex, disability or age forty (40) and over. The contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.
- 2. The contractor shall not print or publish or cause to be printed or published a notice or advertisement relating to employment by such an employer or membership in or any classification or referral for employment by the employment agency, indicating any preference, limitation, specification, or discrimination, based on race, color, religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, except that such a notice or advertisement may indicate a preference, limitation, or specification based on religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, when religion, national origin, sex, or age forty (40) and over, or because the person is a qualified individual with a disability, is a bona fide occupational qualification for employment.
- 3. If the contractor is in control of apprenticeship or other training or retraining, including on-the-job training programs, he shall not discriminate against an individual because of his race, color, religion, national origin, sex, disability or age forty (40) and over, in admission to, or employment in any program established to provide apprenticeship or other training.

4. The contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other contract or understanding, a notice to be provided advising the said labor union or workers' representative of the contractor's commitments under this section, and shall post copies of the notice in conspicuous places available to employees and applicants for employment. The contractor will take such action with respect to any subcontract or purchase order as the administrating agency may direct as a means of enforcing such provisions, including sanctions for non-compliance.

Revised: January 25, 2017

Standard Title VI/Non-Discrimination Assurances

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees as follows:

- Compliance with Regulations: The contractor (hereinafter includes consultants) will comply with the Acts
 and the Regulations relative to Non-discrimination in Federally-assisted programs of the U.S. Department of
 Transportation, Federal Highway Administration, as they may be amended from time to time, which are
 herein incorporated by reference and made a part of this contract.
- 2. Non-discrimination: The contractor, with regard to the work performed by it during the contract, will_not discriminate on the grounds of race, color, or national origin in the selection and retention of subcontractors, including procurements of materials and leases of equipment. The contractor will not participate directly or indirectly in the discrimination prohibited by the Acts and the Regulations, including employment practices when the contract covers any activity, project, or program set forth in Appendix B of 49 CFR Part 21.
- 3. Solicitations for Subcontracts, Including Procurements of Materials and Equipment: In all solicitations, either by competitive bidding, or negotiation made by the contractor for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier will be notified by the contractor of the contractor's obligations under this contract and the Acts and the Regulations relative to Non-discrimination on the grounds of race, color, or national origin.
- [4. Information and Reports: The contractor will_provide all information and reports required by the Acts, the Regulations, and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information, and its facilities as may be determined by the Recipient or the Federal Highway Administration to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the contractor will so certify to the Recipient or the Federal Highway Administration, as appropriate, and will set forth what efforts it has made to obtain the information.
- 5. Sanctions for Noncompliance: In the event of a contractor's noncompliance with the Non-discrimination provisions of this contract, the Recipient will impose such contract sanctions as it or the Federal Highway Administration may determine to be appropriate, including, but not limited to:
 - a. withholding payments to the contractor under the contract until the contractor complies; and/or
 - b. cancelling, terminating, or suspending a contract, in whole or in part.
- 6. Incorporation of Provisions: The contractor will include the provisions of paragraphs one through six in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and directives issued pursuant thereto. The contractor will take action with respect to any subcontract or procurement as the Recipient or the Federal Highway Administration may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the contractor becomes involved in, or is threatened with litigation by a subcontractor, or supplier because of such direction, the contractor may request the Recipient to enter into any litigation to protect the interests of the Recipient. In addition, the contractor may request the United States to enter into the litigation to protect the interests of the United States.

Standard Title VI/Non-Discrimination Statutes and Authorities

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees to comply with the following non-discrimination statutes and authorities; including but not limited to:

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d et seq., 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21;
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. § 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 et seq.), (prohibits discrimination on the basis of sex);
- Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 et seq.), as amended, (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 et seq.), (prohibits discrimination on the basis of age);
- Airport and Airway Improvement Act of 1982, (49 USC § 471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987, (PL 100-209), (Broadened the scope, coverage and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975 and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, sub-recipients and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act, which prohibit discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131 -- 12189) as implemented by Department of Transportation regulations at 49 C.F.R. parts 37 and 38;
- The Federal Aviation Administration's Non-discrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);
- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which ensures non-discrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of limited English proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);
- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. 1681 et seq).

EXECUTIVE BRANCH CODE OF ETHICS

In the 1992 regular legislative session, the General Assembly passed and Governor Brereton Jones signed Senate Bill 63 (codified as KRS 11A), the Executive Branch Code of Ethics, which states, in part:

KRS 11A.040 (7) provides:

No present or former public servant shall, within six (6) months following termination of his office or employment, accept employment, compensation, or other economic benefit from any person or business that contracts or does business with, or is regulated by, the state in matters in which he was directly involved during the last thirty-six (36) months of his tenure. This provision shall not prohibit an individual from returning to the same business, firm, occupation, or profession in which he was involved prior to taking office or beginning his term of employment, or for which he received, prior to his state employment, a professional degree or license, provided that, for a period of six (6) months, he personally refrains from working on any matter in which he was directly involved during the last thirty-six (36) months of his tenure in state government. This subsection shall not prohibit the performance of ministerial functions, including but not limited to filing tax returns, filing applications for permits or licenses, or filing incorporation papers, nor shall it prohibit the former officer or public servant from receiving public funds disbursed through entitlement programs.

KRS 11A.040 (9) states:

A former public servant shall not represent a person or business before a state agency in a matter in which the former public servant was directly involved during the last thirty-six (36) months of his tenure, for a period of one (1) year after the latter of:

- a) The date of leaving office or termination of employment; or
- b) The date the term of office expires to which the public servant was elected.

This law is intended to promote public confidence in the integrity of state government and to declare as public policy the idea that state employees should view their work as a public trust and not as a way to obtain private benefits.

If you have worked for the executive branch of state government within the past six months, you may be subject to the law's prohibitions. The law's applicability may be different if you hold elected office or are contemplating representation of another before a state agency.

Also, if you are affiliated with a firm which does business with the state and which employs former state executive-branch employees, you should be aware that the law may apply to them.

In case of doubt, the law permits you to request an advisory opinion from the Executive Branch Ethics Commission, 3 Fountain Place, Frankfort, Kentucky 40601; telephone (502) 564-7954.

Revised: January 27, 2017

General Decision Number: KY190038 02/15/2019 KY38

Superseded General Decision Number: KY20180100

State: Kentucky

Construction Type: Highway

Counties: Anderson, Bath, Bourbon, Boyd, Boyle, Bracken, Breckinridge, Bullitt, Carroll, Carter, Clark, Elliott, Fayette, Fleming, Franklin, Gallatin, Grant, Grayson, Greenup, Hardin, Harrison, Henry, Jefferson, Jessamine, Larue, Lewis, Madison, Marion, Mason, Meade, Mercer, Montgomery, Nelson, Nicholas, Oldham, Owen, Robertson, Rowan, Scott, Shelby, Spencer, Trimble, Washington and Woodford Counties in Kentucky.

HIGHWAY CONSTRUCTION PROJECTS (excluding tunnels, building structures in rest area projects & railroad construction; bascule, suspension & spandrel arch bridges designed for commercial navigation, bridges involving marine construction; and other major bridges).

Note: Under Executive Order (EO) 13658, an hourly minimum wage of \$10.60 for calendar year 2019 applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2015. If this contract is covered by the EO, the contractor must pay all workers in any classification listed on this wage determination at least \$10.60 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in calendar year 2019. If this contract is covered by the EO and a classification considered necessary for performance of work on the contract does not appear on this wage determination, the contractor must pay workers in that classification at least the wage rate determined through the conformance process set forth in 29 CFR 5.5(a)(1)(ii) (or the EO minimum wage rate, if it is higher than the conformed wage rate). The EO minimum wage rate will be adjusted annually. Please note that this EO applies to the above-mentioned types of contracts entered into by the federal government that are subject to the Davis-Bacon Act itself, but it does not apply to contracts subject only to the Davis-Bacon Related Acts, including those set forth at 29 CFR 5.1(a)(2)-(60). Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Modification Number Publication Date

0 01/04/2019 1 02/15/2019

BRIN0004-003 06/01/2017

BRECKENRIDGE COUNTY

Rates Fringes

BRICKLAYER		\$ 26.80	12.38	
BRKY0001-005	06/01/2017			

BULLITT, CARROLL, GRAYSON, HARDIN, HENRY, JEFFERSON, LARUE, MARION, MEADE, NELSON, OLDHAM, SHELBY, SPENCER, & TRIMBLE COUNTIES:

	Rates	Fringes
BRICKLAYER	\$ 26.80	12.38
BRKY0002-006 06/01/2017		

BRACKEN, GALLATIN, GRANT, MASON & ROBERTSON COUNTIES:

	Rates	Fringes
BRICKLAYER	.\$ 27.81	13.01
BRKY0007-004 06/01/2017		

BOYD, CARTER, ELLIOT, FLEMING, GREENUP, LEWIS & ROWAN COUNTIES:

	Rates	Fringes
BRICKLAYER	\$ 32.98	19.02
BRKY0017-004 06/01/2017		

ANDERSON, BATH, BOURBON, BOYLE, CLARK, FAYETTE, FRANKLIN, HARRISON, JESSAMINE, MADISON, MERCER, MONTGOMERY, NICHOLAS, OWEN, SCOTT, WASHINGTON & WOODFORD COUNTIES:

	Rates	Fringes
BRICKLAYER	.\$ 26.47	12.76
CARP0064-001 05/01/2015		
	Rates	Fringes
CARPENTER	•	16.06 16.06

ELEC0212-008 06/04/2018

BRACKEN, GALLATIN and GRANT COUNTIES

PILEDRIVERMAN.....\$ 27.75

	Rates	Fringes
ELECTRICIAN	.\$ 28.39	18.98

* ELEC0212-014 11/26/2018

BRACKEN, GALLATIN & GRANT COUNTIES:

16.06

	Rates	Fringes
Sound & Communication Technician	\$ 24.35	10.99
ELEC0317-012 06/01/2018		
BOYD, CARTER, ELLIOT & ROWAN COUNT	TIES:	
	Rates	Fringes
ELECTRICIAN (Wiremen) Cable Splicer Electrician		18.13 20.03
ELEC0369-007 05/30/2018		
ANDERSON, BATH, BOURBON, BOYLE, BICLARK, FAYETTE, FRAONKLIN, GRAYSON JEFFERSON, JESSAMINE, LARUE, MADIS MONTGOMERY, NELSON, NICHOLAS, OLDING SHELBY, SPENCER, TRIMBLE, WASHING	N, HARDIN, HARRI SON, MARION, MEA HAM, OWEN, ROBEI	ISON, HENRY, ADE, MERCER, RTSON, SCOTT,
	Rates	Fringes
ELECTRICIAN	\$ 31.66	17.01
* ELEC0575-002 12/31/2018		
FLEMING, GREENUP, LEWIS & MASON CO	OUNTIES:	

	Rates	Fringes	
ELECTRICIAN	\$ 32.75	16.69	
TNGT0101 010 07/01/0017			

ENGI0181-018 07/01/2017

	Rates	Fringes
POWER EQUIPMENT OPERATOR		
GROUP 1	\$ 31.95	15.15
GROUP 2	\$ 29.09	15.15
GROUP 3	\$ 29.54	15.15
GROUP 4	\$ 28.77	15.15

OPERATING ENGINEER CLASSIFICATIONS

GROUP 1 - A-Frame Winch Truck; Auto Patrol; Backfiller;
Batcher Plant; Bituminous Paver; Bituminous Transfer
Machine; Boom Cat; Bulldozer; Mechanic; Cableway; Carry-All
Scoop; Carry Deck Crane; Central Compressor Plant; Cherry
Picker; Clamshell; Concrete Mixer (21 cu. ft. or Over);
Concrete Paver; Truck-Mounted Concrete Pump; Core Drill;
Crane; Crusher Plant; Derrick; Derrick Boat; Ditching &
Trenching Machine; Dragline; Dredge Operator; Dredge
Engineer; Elevating Grader & Loaders; Grade-All; Gurries;
Heavy Equipment Robotics Operator/Mechanic; High Lift;
Hoe-Type Machine; Hoist (Two or More Drums); Hoisting
Engine (Two or More Drums); Horizontal Directional Drill

Operator; Hydrocrane; Hyster; KeCal Loader; LeTourneau; Locomotive; Mechanic; Mechanically Operated Laser Screed; Mechanic Welder; Mucking Machine; Motor Scraper; Orangepeel Bucket; Overhead Crane; Piledriver; Power Blade; Pumpcrete; Push Dozer; Rock Spreader, attached to equipment; Rotary Drill; Roller (Bituminous); Rough Terrain Crane; Scarifier; Scoopmobile; Shovel; Side Boom; Subgrader; Tailboom; Telescoping Type Forklift; Tow or Push Boat; Tower Crane (French, German & other types); Tractor Shovel; Truck Crane; Tunnel Mining Machines, including Moles, Shields or similar types of Tunnel Mining Equipment

GROUP 2 - Air Compressor (Over 900 cu. ft. per min.);
Bituminous Mixer; Boom Type Tamping Machine; Bull Float;
Concrete Mixer (Under 21 cu. ft.); Dredge Engineer;
Electric Vibrator; Compactor/Self-Propelled Compactor;
Elevator (One Drum or Buck Hoist); Elevator (When used to
Hoist Building Material); Finish Machine; Firemen & Hoist
(One Drum); Flexplane; Forklift (Regardless of Lift
Height); Form Grader; Joint Sealing Machine; Outboard Motor
Boat; Power Sweeper (Riding Type); Roller (Rock); Ross
Carrier; Skid Mounted or Trailer Mounted Conrete Pump; Skid
Steer Machine with all Attachments; Switchman or Brakeman;
Throttle Valve Person; Tractair & Road Widening Trencher;
Tractor (50 H.P. or Over); Truck Crane Oiler; Tugger;
Welding Machine; Well Points; & Whirley Oiler

GROUP 3 - All Off Road Material Handling Equipment, including Articulating Dump Trucks; Greaser on Grease Facilities servicing Heavy Equipment

GROUP 4 - Bituminous Distributor; Burlap & Curing Machine; Cement Gun; Concrete Saw; Conveyor; Deckhand Oiler; Grout Pump; Hydraulic Post Driver; Hydro Seeder; Mud Jack; Oiler; Paving Joint Machine; Power Form Handling Equipment; Pump; Roller (Earth); Steerman; Tamping Machine; Tractor (Under 50 H.P.); & Vibrator

CRANES - with booms 150 ft. & Over (Including JIB), and where the length of the boom in combination with the length of the piling leads equals or exceeds 150 ft. - \$1.00 over Group 1 rate

EMPLOYEES ASSIGNED TO WORK BELOW GROUND LEVEL ARE TO BE PAID 10%

ABOVE BASIC WAGE RATE. THIS DOES NOT APPLY TO OPEN CUT WORK.

IRON0044-009 06/01/2018

BRACKEN, GALLATIN, GRANT, HARRISON, ROBERTSON,
BOURBON (Northern third, including Townships of Jackson,
Millersburg, Ruddel Mills & Shawhan);
CARROLL (Eastern third, including the Township of Ghent);
FLEMING (Western part, excluding Townships of Beechburg, Colfax,
Elizaville, Flemingsburg, Flemingsburg Junction, Foxport,
Grange City, Hillsboro, Hilltop, Mount Carmel, Muses Mills,
Nepton, Pecksridge, Plummers Landing, Plummers Mill, Poplar
Plains, Ringos Mills, Tilton & Wallingford);
MASON (Western two-thirds, including Townships of Dover,

Lewisburg, Mays Lick, Maysville, Minerva, Moranburg, Murphysville, Ripley, Sardis, Shannon, South Ripley & Washington);

NICHOLAS (Townships of Barefoot, Barterville, Carlisle, Ellisville, Headquarters, Henryville, Morningglory, Myers & Oakland Mills);

OWEN (Townships of Beechwood, Bromley, Fairbanks, Holbrook, Jonesville, Long Ridge, Lusby's Mill, New, New Columbus, New Liberty, Owenton, Poplar Grove, Rockdale, Sanders, Teresita & Wheatley);

SCOTT (Northern two-thirds, including Townships of Biddle, Davis, Delaplain, Elmville, Longlick, Muddy Ford, Oxford, Rogers Gap, Sadieville, Skinnersburg & Stonewall)

	Rates	Fringes	
IRONWORKER			
Fence Erector	\$ 26.76	21.20	
Structural	\$ 28.17	21.20	

IRON0070-006 06/01/2018

ANDERSON, BOYLE, BRECKINRIDGE, BULLITT, FAYETTE, FRANKLIN, GRAYSON, HARDIN, HENRY, JEFFERSON, JESSAMINE, LARUE, MADISON, MARION, MEADE, MERCER, NELSON, OLDHAM, SHELBY, SPENCER, TRIMBLE, WASHINGTON & WOODFORD
BOURBON (Southern two-thirds, including Townships of Austerlity, Centerville, Clintonville, Elizabeth, Hutchison, Littlerock, North Middletown & Paris);
CARROLL (Western two-thirds, including Townships of Carrollton, Easterday, English, Locust, Louis, Prestonville & Worthville);
CLARK (Western two-thirds, including Townships of Becknerville, Flanagan, Ford, Pine Grove, Winchester & Wyandotte);
OWEN (Eastern eighth, including Townships of Glenmary, Gratz, Monterey, Perry Park & Tacketts Mill);
SCOTT (Southern third, including Townships of Georgetown, Great Crossing, Newtown, Stampling Ground & Woodlake);

	Rates	Fringes
IRONWORKER	\$ 28.79	22.50

IRON0769-007 06/01/2018

BATH, BOYD, CARTER, ELLIOTT, GREENUP, LEWIS, MONTGOMERY & ROWAN CLARK (Eastern third, including townships of Bloomingdale, Hunt, Indian Fields, Kiddville, Loglick, Rightangele & Thomson); FLEMING (Townships of Beechburg, Colfax, Elizaville, Flemingsburg, Flemingsburg Junction, Foxport, Grange City, Hillsboro, Hilltop, Mount Carmel, Muses Mills, Nepton, Pecksridge, Plummers Landing, Plummers Mill, Poplar Plains, Ringos Mills, Tilton & Wallingford); MASON (Eastern third, including Townships of Helena, Marshall, Orangeburg, Plumville & Springdale); NICHOLAS (Eastern eighth, including the Township of Moorefield Sprout)

F	Rates	Fringes
IRONWORKER		
ZONE 1\$	31.67	25.27
ZONE 2\$	31.67	25.27
ZONE 3\$	31.67	25.27

ZONE 1 - (no base rate increase) Up to 10 mile radius of Union Hall, 1643 Greenup Ave, Ashland, KY.

ZONE 2 - (add \$0.40 per hour to base rate) 10 to 50 mile radius of Union Hall, 1643 Greenup Ave, Ashland, KY.

ZONE 3 - (add \$2.00 per hour to base rate) 50 mile radius & over of Union Hall, 1643 Greenup Ave, Ashland, KY.

LABO0189-003 07/01/2018

BATH, BOURBON, BOYD, BOYLE, BRACKEN, CARTER, CLARK, ELLIOTT, FAYETTE, FLEMING, FRANKLIN, GALLATIN, GRANT, GREENUP, HARRISON, JESSAMINE, LEWIS, MADISON, MASON, MERCER, MONTGOMERY, NICHOLAS, OWEN, ROBERTSON, ROWAN, SCOTT, & WOOLFORD COUNTIES

]	Rates	Fringes
Laborers:			
GROUP	1\$	23.07	14.21
GROUP	2\$	23.32	14.21
GROUP	3\$	23.37	14.21
GROUP	4\$	23.97	14.21

LABORERS CLASSIFICATIONS

GROUP 1 - Aging & Curing of Concrete; Asbestos Abatement Worker; Asphalt Plant; Asphalt; Batch Truck Dump; Carpenter Tender; Cement Mason Tender; Cleaning of Machines; Concrete; Demolition; Dredging; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level D; Flagperson; Grade Checker; Hand Digging & Hand Back Filling; Highway Marker Placer; Landscaping, Mesh Handler & Placer; Puddler; Railroad; Rip-rap & Grouter; Right-of-Way; Sign, Guard Rail & Fence Installer; Signal Person; Sound Barrier Installer; Storm & Sanitary Sewer; Swamper; Truck Spotter & Dumper; Wrecking of Concrete Forms; General Cleanup

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer);
Brickmason Tender; Mortar Mixer Operator; Scaffold Builder;
Burner & Welder; Bushammer; Chain Saw Operator; Concrete
Saw Operator; Deckhand Scow Man; Dry Cement Handler;
Environmental - Nuclear, Radiation, Toxic & Hazardous Waste
- Level C; Forklift Operator for Masonary; Form Setter;
Green Concrete Cutting; Hand Operated Grouter & Grinder
Machine Operator; Jackhammer; Pavement Breaker; Paving
Joint Machine; Pipelayer; Plastic Pipe Fusion; Power Driven
Georgia Buggy & Wheel Barrow; Power Post Hole Digger;
Precast Manhole Setter; Walk-Behind Tamper; Walk-Behind
Trencher; Sand Blaster; Concrete Chipper; Surface Grinder;
Vibrator Operator; Wagon Driller

GROUP 3 - Asphalt Luteman & Raker; Gunnite Nozzleman; Gunnite Operator & Mixer; Grout Pump Operator; Side Rail Setter; Rail Paved Ditches; Screw Operator; Tunnel (Free Air); Water Blaster

GROUP 4 - Caisson Worker (Free Air); Cement Finisher; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Levels A & B; Miner & Driller (Free Air); Tunnel Blaster; & Tunnel Mucker (Free Air); Directional & Horizontal Boring; Air Track Drillers (All Types); Powdermen & Blasters; Troxler & Concrete Tester if Laborer is Utilized

LABO0189-008 07/01/2018

ANDERSON, BULLITT, CARROLL, HARDIN, HENRY, JEFFERSON, LARUE, MARION, MEADE, NELSON, OLDHAM, SHELBY, SPENCER, TRIMBLE & WASHINGTON COUNTIES

	I	Rates	Fringes
Laborers:			
GROUP	1\$	23.07	14.21
GROUP	2\$	23.32	14.21
GROUP	3\$	23.37	14.21
GROUP	4\$	23.97	14.21

LABORERS CLASSIFICATIONS

GROUP 1 - Aging & Curing of Concrete; Asbestos Abatement Worker; Asphalt Plant; Asphalt; Batch Truck Dump; Carpenter Tender; Cement Mason Tender; Cleaning of Machines; Concrete; Demolition; Dredging; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level D; Flagperson; Grade Checker; Hand Digging & Hand Back Filling; Highway Marker Placer; Landscaping, Mesh Handler & Placer; Puddler; Railroad; Rip-rap & Grouter; Right-of-Way; Sign, Guard Rail & Fence Installer; Signal Person; Sound Barrier Installer; Storm & Sanitary Sewer; Swamper; Truck Spotter & Dumper; Wrecking of Concrete Forms; General Cleanup

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer);
Brickmason Tender; Mortar Mixer Operator; Scaffold Builder;
Burner & Welder; Bushammer; Chain Saw Operator; Concrete
Saw Operator; Deckhand Scow Man; Dry Cement Handler;
Environmental - Nuclear, Radiation, Toxic & Hazardous Waste
- Level C; Forklift Operator for Masonary; Form Setter;
Green Concrete Cutting; Hand Operated Grouter & Grinder
Machine Operator; Jackhammer; Pavement Breaker; Paving
Joint Machine; Pipelayer; Plastic Pipe Fusion; Power Driven
Georgia Buggy & Wheel Barrow; Power Post Hole Digger;
Precast Manhole Setter; Walk-Behind Tamper; Walk-Behind
Trencher; Sand Blaster; Concrete Chipper; Surface Grinder;
Vibrator Operator; Wagon Driller

GROUP 3 - Asphalt Luteman & Raker; Gunnite Nozzleman; Gunnite Operator & Mixer; Grout Pump Operator; Side Rail Setter; Rail Paved Ditches; Screw Operator; Tunnel (Free Air); Water Blaster

GROUP 4 - Caisson Worker (Free Air); Cement Finisher; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Levels A & B; Miner & Driller (Free Air); Tunnel Blaster; & Tunnel Mucker (Free Air); Directional & Horizontal Boring; Air Track Drillers (All Types); Powdermen & Blasters; Troxler & Concrete Tester if Laborer is Utilized

LABO0189-009 07/01/2018

BRECKINRIDGE & GRAYSON COUNTIES

	J	Rates	Fringes
Laborers:			
GROUP	1\$	23.07	14.21
GROUP	2\$	23.32	14.21
GROUP	3\$	23.37	14.21
GROUP	4\$	23.97	14.21

LABORERS CLASSIFICATIONS

GROUP 1 - Aging & Curing of Concrete; Asbestos Abatement Worker; Asphalt Plant; Asphalt; Batch Truck Dump; Carpenter Tender; Cement Mason Tender; Cleaning of Machines; Concrete; Demolition; Dredging; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Level D; Flagperson; Grade Checker; Hand Digging & Hand Back Filling; Highway Marker Placer; Landscaping, Mesh Handler & Placer; Puddler; Railroad; Rip-rap & Grouter; Right-of-Way; Sign, Guard Rail & Fence Installer; Signal Person; Sound Barrier Installer; Storm & Sanitary Sewer; Swamper; Truck Spotter & Dumper; Wrecking of Concrete Forms; General Cleanup

GROUP 2 - Batter Board Man (Sanitary & Storm Sewer);
Brickmason Tender; Mortar Mixer Operator; Scaffold Builder;
Burner & Welder; Bushammer; Chain Saw Operator; Concrete
Saw Operator; Deckhand Scow Man; Dry Cement Handler;
Environmental - Nuclear, Radiation, Toxic & Hazardous Waste
- Level C; Forklift Operator for Masonary; Form Setter;
Green Concrete Cutting; Hand Operated Grouter & Grinder
Machine Operator; Jackhammer; Pavement Breaker; Paving
Joint Machine; Pipelayer; Plastic Pipe Fusion; Power Driven
Georgia Buggy & Wheel Barrow; Power Post Hole Digger;
Precast Manhole Setter; Walk-Behind Tamper; Walk-Behind
Trencher; Sand Blaster; Concrete Chipper; Surface Grinder;
Vibrator Operator; Wagon Driller

GROUP 3 - Asphalt Luteman & Raker; Gunnite Nozzleman; Gunnite Operator & Mixer; Grout Pump Operator; Side Rail Setter; Rail Paved Ditches; Screw Operator; Tunnel (Free Air); Water Blaster

GROUP 4 - Caisson Worker (Free Air); Cement Finisher; Environmental - Nuclear, Radiation, Toxic & Hazardous Waste - Levels A & B; Miner & Driller (Free Air); Tunnel Blaster; & Tunnel Mucker (Free Air); Directional & Horizontal Boring; Air Track Drillers (All Types); Powdermen & Blasters; Troxler & Concrete Tester if Laborer is Utilized

PAIN0012-005 06/11/2005

BATH, BOURBON, BOYLE, CLARK, FAYETTE, FLEMING, FRANKLIN, HARRISON, JESSAMINE, MADISON, MERCER, MONTGOMERY, NICHOLAS, ROBERTSON, SCOTT & WOODFORD COUNTIES:

	Rates	Fringes
PAINTER		
Bridge/Equipment Tender and/or Containment Builder. Brush & Roller	·	5.90 5.90
Elevated Tanks; Steeplejack Work; Bridge & Lead Abatement	.\$ 22.30	5.90
Sandblasting & Waterblasting Spray		5.90 5.90

PAIN0012-017 05/01/2015

BRACKEN, GALLATIN, GRANT, MASON & OWEN COUNTIES:

	Rates	Fringes
PAINTER (Heavy & Highway		
Bridges - Guardrails -		
Lightpoles - Striping)		
Bridge Equipment Tender		
and Containment Builder	\$ 20.73	9.06
Brush & Roller	\$ 23.39	9.06
Elevated Tanks;		
Steeplejack Work; Bridge	&	
Lead Abatement	\$ 24.39	9.06
Sandblasting & Water		
Blasting	\$ 24.14	9.06
Spray		9.06

PAIN0118-004 06/01/2018

ANDERSON, BRECKINRIDGE, BULLITT, CARROLL, GRAYSON, HARDIN, HENRY, JEFFERSON, LARUE, MARION, MEADE, NELSON, OLDHAM, SHELBY, SPENCER, TRIMBLE & WASHINGTON COUNTIES:

	Rates	Fringes
PAINTER		
Brush & Roller	\$ 22.00	12.52
Tools, Waterblast & Steam		
Cleaning	\$ 23.00	12.52

PAIN1072-003 12/01/2018

BOYD, CARTER, ELLIOTT, GREENUP, LEWIS and ROWAN COUNTIES

	Rates	Fringes
Painters: Bridges; Locks; Dams; Tension Towers & Energized	ė 22 22	10 50
Substations Power Generating Facilities		18.50 18.50
PLUM0248-003 06/01/2018		
BOYD, CARTER, ELLIOTT, GREENUP,	LEWIS & ROWAN CO	DUNTIES:
	Rates	Fringes
Plumber and Steamfitter	.\$ 36.00	20.23
PLUM0392-007 06/01/2018		
BRACKEN, CARROLL (Eastern Half), ROBERTSON COUNTIES:	GALLATIN, GRANT	r, MASON, OWEN &
	Rates	Fringes
Plumbers and Pipefitters	.\$ 32.01	19.67
PLUM0502-003 08/01/2018		
BRECKINRIDGE, BULLITT, CARROLL ((Western three-fourths), GRAYSON LARUE, MARION, MEADE, NELSON, OI WASHINGTON COUNTIES	, HARDIN, HENRY,	JEFFERSON,
	Rates	Fringes
PLUMBER	.\$ 34.62	20.78
SUKY2010-160 10/08/2001		
	Rates	Fringes
Truck drivers: GROUP 1	.\$ 16.68 .\$ 16.86	7.34 7.34 7.34 7.34
TRUCK DRIVER CLASSIFICATIONS		
GROUP 1 - Mobile Batch Truck Te	nder	
GROUP 2 - Greaser; Tire Changer	; & Mechanic Ter	nder
GROUP 3 - Single Axle Dump; Fl Trailer when used to pull buil Tandem Axle Dump; Distributor;	ding materials a	and equipment;

GROUP 4 - Euclid & Other Heavy Earthmoving Equipment &

Lowboy; Articulator Cat; 5-Axle Vehicle; Winch & A-Frame when used in transporting materials; Ross Carrier; Forklift when used to transport building materials; & Pavement Breaker

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of "identifiers" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate (weighted union average rate).

Union Rate Identifiers

A four letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than "SU" or "UAVG" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing

the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers

Classifications listed under the "SU" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those classifications; however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

WAGE DETERMINATION APPEALS PROCESS

- 1.) Has there been an initial decision in the matter? This can be:
- * an existing published wage determination
- * a survey underlying a wage determination
- * a Wage and Hour Division letter setting forth a position on a wage determination matter
- * a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations Wage and Hour Division U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

END OF GENERAL DECISION

Fringe benefit amounts are applicable for all hours worked except when otherwise noted.

No laborer, workman or mechanic shall be paid at a rate less than that of a Journeyman except those classified as bona fide apprentices.

Apprentices or trainees shall be permitted to work as such subject to Administrative Regulations adopted by the Commissioner of Workplace Standards. Copies of these regulations will be furnished upon request from any interested person.

Before using apprentices on the job the contractor shall present to the Contracting Officer written evidence of registration of such employees in a program of a State apprenticeship and training agency approved and recognized by the U. S. Bureau of Apprenticeship and Training. In the absence of such a State agency, the contractor shall submit evidence of approval and registration by the U. S. Bureau of Apprenticeship and Training.

The contractor shall submit to the Contracting Officer, written evidence of the established apprenticeship-journeyman ratios and wage rates in the project area, which will be the basis for establishing such ratios and rates for the project under the applicable contract provisions.

TO: EMPLOYERS/EMPLOYEES

PREVAILING WAGE SCHEDULE:

The wages indicated on this wage schedule are the least permitted to be paid for the occupations indicated. When an employee works in more than one classification, the employer must record the number of hours worked in each classification at the prescribed hourly base rate.

OVERTIME:

Overtime is to be paid to an employee at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty (40) hours in such workweek. Wage violations or questions should be directed to the designated Engineer or the undersigned.

Director Division of Construction Procurement Frankfort, Kentucky 40622 502-564-3500

NOTICE OF REQUIREMENT FOR AFFIRMATIVE ACTION TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY (Executive Order 11246)

- 1. The Offeror's or Bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Specifications" set forth herein.
- 2. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate work force in each trade on all construction work in the covered area, are as follows:

GOALS FOR MINORITY	GOALS FOR FEMALE
PARTICIPATION	PARTICIPATION IN
IN EACH TRADE	EACH TRADE
10.8%	6.9%

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally-assisted) performed in the covered area. If the contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the contractor also is subject to the goals for both its federally involved and non-federally involved construction.

The Contractor's compliance with the Executive Order and the regulations in CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4, 3(a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The Contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within ten (10) working days of award of any construction subcontract in excess of \$10,000.00 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the name, address and telephone number of the subcontractor; employer identification number of the subcontractor; estimated dollar amount of the subcontract; estimated starting and completion dates of the subcontract; and the geographical area in which the subcontract is to be performed. The notification shall be mailed to:

Evelyn Teague, Regional Director Office of Federal Contract Compliance Programs 61 Forsyth Street, SW, Suite 7B75 Atlanta, Georgia 30303-8609

4. As used in this Notice, and in the contract resulting from this solicitation, the "covered area" is Scott County.

NOTICE OF REQUIREMENT FOR AFFIRMATIVE ACTION TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY (Executive Order 11246)

- 1. The Offeror's or Bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Specifications" set forth herein.
- 2. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate work force in each trade on all construction work in the covered area, are as follows:

GOALS FOR MINORITY	GOALS FOR FEMALE
PARTICIPATION	PARTICIPATION IN
IN EACH TRADE	EACH TRADE
10.8%	6.9%

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally-assisted) performed in the covered area. If the contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the contractor also is subject to the goals for both its federally involved and non-federally involved construction.

The Contractor's compliance with the Executive Order and the regulations in CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4, 3(a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The Contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within ten (10) working days of award of any construction subcontract in excess of \$10,000.00 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the name, address and telephone number of the subcontractor; employer identification number of the subcontractor; estimated dollar amount of the subcontract; estimated starting and completion dates of the subcontract; and the geographical area in which the subcontract is to be performed. The notification shall be mailed to:

Evelyn Teague, Regional Director Office of Federal Contract Compliance Programs 61 Forsyth Street, SW, Suite 7B75 Atlanta, Georgia 30303-8609

4. As used in this Notice, and in the contract resulting from this solicitation, the "covered area" is Woodford County.

PART IV

INSURANCE

Refer to *Kentucky Standard Specifications for Road and Bridge Construction*,

current edition

PART V

BID ITEMS

191043

PROPOSAL BID ITEMS

Report Date 7/5/19

Page 1 of 2

Section: 0001 - PAVING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0010	00001		DGA BASE	49.00	TON		\$	
0020	00212		CL2 ASPH BASE 1.00D PG64-22	51.00	TON		\$	
0030	00301		CL2 ASPH SURF 0.38D PG64-22	9.00	TON		\$	

Section: 0002 - ROADWAY

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0040	02014		BARRICADE-TYPE III	6.00	EACH		\$	
0050	02200		ROADWAY EXCAVATION	18.00	CUYD		\$	
0060	02242		WATER	1.00	MGAL		\$	
0070	02351		GUARDRAIL-STEEL W BEAM-S FACE	175.00	LF		\$	
0800	02369		GUARDRAIL END TREATMENT TYPE 2A	4.00	EACH		\$	
0090	02381		REMOVE GUARDRAIL	189.00	LF		\$	
0100	02545		CLEARING AND GRUBBING 0.174 ACRES	1.00	LS		\$	
0110	02545		CLEARING AND GRUBBING 0.217 ACRES- SCOTT	1.00	LS		\$	
0120	02562		TEMPORARY SIGNS	81.00	SQFT		\$	
0130	02671		PORTABLE CHANGEABLE MESSAGE SIGN	2.00	EACH		\$	
0140	02701		TEMP SILT FENCE	90.00	LF		\$	
0150	02704		SILT TRAP TYPE B	2.00	EACH		\$	
0160	02707		CLEAN SILT TRAP TYPE B	2.00	EACH		\$	
0170	02720		SIDEWALK-4 IN CONCRETE	7.00	SQYD		\$	
0180	02726		STAKING SCOTT	1.00	LS		\$	
0190	02726		STAKING WOODFORD	1.00	LS		\$	
0200	02731		REMOVE STRUCTURE WOODFORD	1.00	LS		\$	
0210	03287		SIDEWALK RAMP TYPE 1	1.00	EACH		\$	
0220	05952		TEMP MULCH	800.00	SQYD		\$	
0230	05953		TEMP SEEDING AND PROTECTION	600.00	SQYD		\$	
0240	05963		INITIAL FERTILIZER	.04	TON		\$	
0250	05964		MAINTENANCE FERTILIZER	.06	TON		\$	
0260	05985		SEEDING AND PROTECTION	1,042.00	SQYD		\$	
0270	05989		SPECIAL SEEDING CROWN VETCH	158.00	SQYD		\$	
0280	05992		AGRICULTURAL LIMESTONE	.74	TON		\$	
0290	08003		FOUNDATION PREPARATION SCOTT	1.00	LS		\$	
0300	08003		FOUNDATION PREPARATION WOODFORD	1.00	LS		\$	
0310	23158ES505		DETECTABLE WARNINGS	10.00	SQFT		\$	
0320	23989EC		PRECAST STEEL TRUSS BRIDGE WOODFORD	1.00	LS		\$	
0330	24550EC		VIBRATION MONITORING SCOTT	1.00	LS		\$	
0340	24601EC		INSTALL INTERPRETIVE SIGNS	2.00	EACH		\$	

191043

PROPOSAL BID ITEMS

Report Date 7/5/19

Page 2 of 2

Section: 0003 - SIGNING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRIC	FP	AMOUNT
0350	06406		SBM ALUM SHEET SIGNS .080 IN	17.00	SQFT		\$	
0360	06407		SBM ALUM SHEET SIGNS .125 IN	46.00	SQFT		\$	
0370	06410		STEEL POST TYPE 1	120.00	LF		\$	
0380	24631EC		BARCODE SIGN INVENTORY	10.00	EACH		\$	

Section: 0004 - DEMOBILIZATION &/OR MOBILIZATION

LINE	BID CODE	ALT DESCRIPTION	QUANTITY	UNIT	UNIT PRIC FP	AMOUNT
0390	02569	DEMOBILIZATION	1.00	LS	\$	