






R2-10

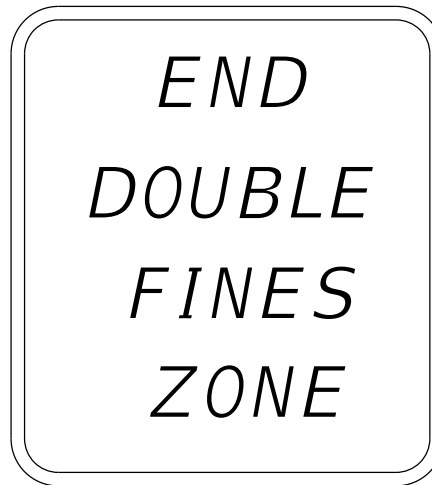

R2-11



12" FY



12" FY



S4-4P

APPLICATION

IN ACCORDANCE WITH KRS 189.2327, IN ORDER FOR FINES TO BE DOUBLED IN A HIGHWAY WORK ZONE, WORK ZONE SIGNS AND DOUBLE FINE SIGNS MUST BE DISPLAYED AND AT LEAST ONE (1) BONA FIDE WORKER MUST BE PRESENT.

~ NOTES ~

1. THE BEGIN AND END DOUBLE FINES SIGNS SHALL BE 48" X 60" FOR FREEWAYS, 36" X 48" FOR EXPRESSWAYS, AND 24" X 30" FOR OTHER ROADWAYS. "WHEN FLASHING" PLAQUES SHALL BE 48" X 18" FOR FREEWAYS, 36" X 18" FOR EXPRESSWAYS, AND 24" X 10" FOR ALL OTHER ROADWAYS.
2. SIGNS SHALL HAVE A WHITE BACKGROUND AND SHALL BE MOUNTED AT ELEVATIONS AND OFFSETS PRESCRIBED IN THE MUTCD.
3. USE ENGINEERING JUDGMENT WHEN DETERMINING THE LIMITS OF DOUBLE FINE ZONES. FOR SHORT LENGTH PROJECTS WHERE WORK WILL OCCUR THROUGHOUT THE PROJECT LIMITS, LOCATE "BEGIN DOUBLE FINES ZONE" SIGN ASSEMBLY BETWEEN THE LAST ADVANCE WARNING SIGN AND THE BEGINNING OF THE ACTIVITY AREA AND LOCATE THE "END DOUBLE FINES ZONE" SIGN 250' IN ADVANCE OF THE "END ROAD WORK" SIGN. FOR LONG LENGTH PROJECTS WHERE WORK WILL NOT OCCUR THROUGHOUT THE PROJECT LIMITS, CONSIDER PLACING SIGNS ONLY IN AREAS WITH ACTIVE CONSTRUCTION.
4. SIGNS SHALL BE DUAL-MOUNTED ON MULTI-LANE HIGHWAYS WHERE MEDIAN IS WIDE ENOUGH TO MAINTAIN LATERAL CLEARANCES AS PRESCRIBED IN THE MUTCD. WHERE CONSTRUCTION ONLY AFFECTS ONE DIRECTION OF A DIVIDED HIGHWAY WITH A BARRIER OR WIDE MEDIAN, SIGNS SHALL NOT BE ERECTED FOR OPPOSING DIRECTION.
5. ADDITIONAL SIGNS MAY BE REQUIRED FOR LONG CONSTRUCTION ZONES OR WHERE RAMPS OR INTERSECTING STREETS JUNCTION WITHIN THE PROJECT LIMITS.
6. BEGIN DOUBLE FINE SIGN ASSEMBLIES MAY INCLUDE A "WHEN FLASHING" PLAQUE AND FLASHING BEACONS. BEACONS SHALL BE YELLOW AND TWELVE (12") INCHES IN DIAMETER, BE MOUNTED HORIZONTALLY NEAR THE TOP OF THE SIGN ASSEMBLY, AND SHALL FLASH ALTERNATELY. BEACONS SHALL CONFORM TO PART 4L OF THE MUTCD.
7. "BEGIN DOUBLE FINES ZONES" SIGNS SHOULD BE COVERED IF A BONA FIDE WORKER WILL NOT BE PRESENT FOR A SIGNIFICANT PERIOD OF TIME. IN SUCH CASES, ASSEMBLIES WITH FLASHING BEACONS SHALL BE TURNED OFF.

BID ITEM UNIT TO BID
SIGNS SQFT

KENTUCKY DEPARTMENT OF HIGHWAYS	
DOUBLE FINES ZONE SIGNS	
STANDARD DRAWING NO. TTD-120-03	
SUBMITTED <i>B. Allen Wolf</i>	DATE 02-26-20
DIRECTOR OF HIGHWAY OPERATIONS	
APPROVED <i>SJO</i>	DATE 02-26-20
STATE HIGHWAY ENGINEER	